



TOOL fox

The right tool for every application




TOOL fox

Superior tool quality from the experts

We understand our customers' concerns regarding the entire process chain and beyond. We ensure the dependability and high performance of our tools through highly specialized manufacturing processes with highly skilled employees.

Phoenix Contact tools will impress you with their innovative solutions for your applications, as well as their precise and durable usage characteristics. The key feature of a professional tool is that you enjoy working with it! The excellent feel and ergonomics of the design and functionality guarantee optimum efficiency and quality. These properties are perfectly combined in all tools from Phoenix Contact.

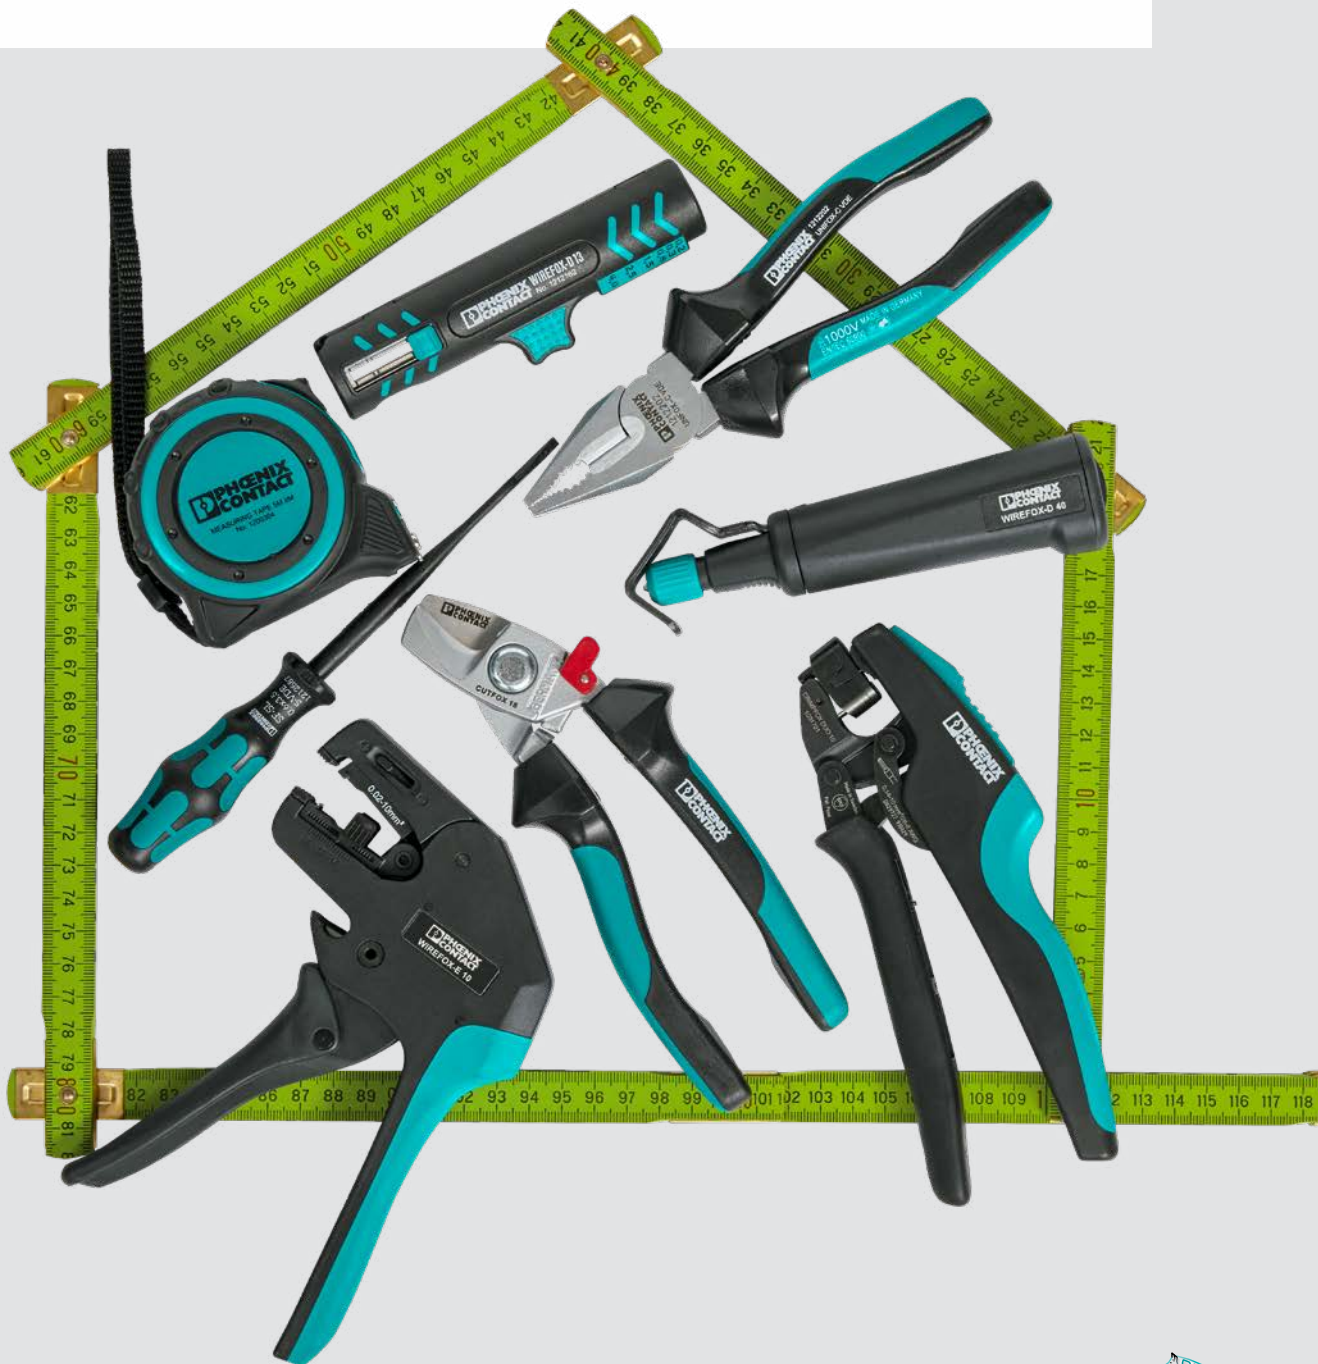

TOOL fox – the right tool for every application

Phoenix Contact offers a full range of professional processing and measuring tools for any electrical engineering application. These tools for cutting, stripping, crimping, and screwing are easy to handle and of the highest quality. Semi-automatic cutting, stripping, and crimping devices can

also be used to increase your shop floor productivity.

High-quality results can only be achieved with professional tools, and the TOOL fox line delivers quality with precision, durability, and effectiveness.

Quality that you can feel

Phoenix Contact tools are made from high-quality components. Find out for yourself:

- Ergonomically designed handles
- Low manual force with optimized leverage
- Specially hardened tool steels
- Consistent high processing quality, even with continuous use



Your advantages

- ✓ Durable, high-quality components and materials
- ✓ Functional and flexible
- ✓ Semi-automatic devices provide increased efficiency
- ✓ Comprehensive product range with everything from a single source
- ✓ Limited Lifetime Warranty on non-wearable parts



Contents

Tool quality TOOL fox	4-5
Cutting and universal tools CUTFOX/UNIFOX	6-11
Stripping tools WIREFOX	12-15
Crimping tools CRIMPFOX	16-41
Screwdrivers and torque screwdrivers SCREWFOX	42-49
Electronics pliers MICROFOX	50-51
Semi-automatic devices Cutting, stripping, and crimping devices	52-59



Cutting

Cable processing starts with the cutting of the conductor or cable.


Conductors and cables in a wide range of sizes, shapes, and insulations can only be processed professionally and permanently with quality tools. Optimum leverage means that you only need to apply low manual force to generate maximum force in the cutting area.

When it comes to cutting conductors and cables in the cross-section range up to 1400 mm², ratchet-driven cable cutters are the solution. The drives keep the required manual force to a minimum.


Both versions, with direct and indirect force transmission, feature special cutting geometries that ensure ease of movement and can be relied upon to produce burr-free, right-angle cuts, preventing deformation of the conductor or cable. The cutting method described above, which is also known as shear cutting, is listed under the generic term "splitting" in DIN 8588. The two blades

move toward and past one another and cut (shear) the material without burring. Bite cutting involves two wedge-shaped blades that move toward one another to cut the material. The wedge angle set for the blades is deliberately large and, therefore, stable. In addition to the hardening of the entire tool, the cutting area is subsequently hardened again inductively to 62 HRC. This makes it possible to sever even extremely hard materials, such as piano wire and spring steel with a tensile strength of up to 2300 N/mm², without damaging the tool. Bite cutting is suitable to a limited extent for cutting through cables and lines.

When used appropriately, the CUTFOX cutting tools from Phoenix Contact can be relied upon for long-term stability and permanently consistent results.

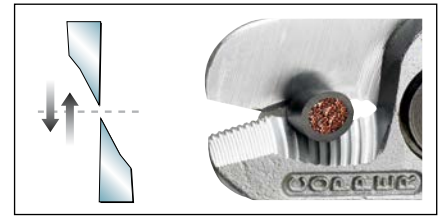

Shear cutting

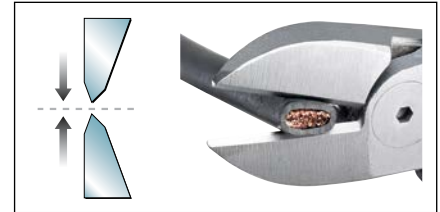

Bite cutting

Stripping

Stripping is the next step in wire processing to create a reliable crimp connection.

Stripping is used as a generic term to describe the removal of insulation from conductors up to 6 AWG. Dismantling describes the stripping process for large conductor cross-sections and multi-strand or multilayered conductors and cables.


Insulation can be removed professionally and quickly using the right stripping or dismantling tool. The length of insulation to be removed varies depending on the terminal point and connector. This is set by means of adjustable limit stops and ensures consistent stripping lengths.

When removing insulation, you must make sure that neither the single wires inside nor the braided shield are damaged. The remaining insulation must not be damaged by the grip pressure, although pressure points on and color changes in the


insulation material are permitted. Further faults that need to be prevented are stipulated in DIN IEC 60352.

Blade geometries suitable for the application in question are used to process special insulation materials. V blades are used for both hard (e.g., Teflon/Radox®) and soft ductile rubber insulation (silicone). In contrast to the straight blade geometry, V blades cut the insulation all the way around, thereby reducing the tear-off force.

In order to meet these requirements, we recommend using Phoenix Contact's self-adjusting wire stripping hand tools or semi-automatic devices.

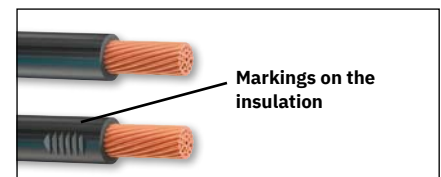

Correctly stripped cable according to DIN IEC 60352

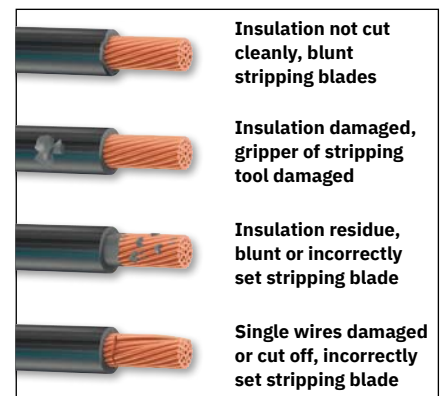

Stripping errors according to DIN IEC 60352

Crimping, pressing, crushing

Crimping describes the mechanical joining of a contact and conductor.

In addition to crimping, two further terms are used based on standards. The type of deformation plays a decisive role here. Based on the type of contact, a distinction is made between:

- Crushing for insulated cable lugs
- Pressing, for ferrules, uninsulated cable lugs, and similar enclosed connectors

If slip-on blade connectors are being processed, for example, this is called crimping.

A number of important points must be considered in order to establish a reliable connection between the contact and conductor.

- The conductor must be processed correctly
- The conductor and the contact must be compatible
- The conductor must be positioned correctly in the contact
- A suitable crimping tool must be selected
- The conductor and contact must be placed in the designated die nest of the pliers

Professional crimping pliers are always equipped with a releasing pressure lock. They unlock as soon as the required crimping pressure is reached, therefore ensuring sufficient pressure is applied. This guarantees the user a constant crimping result with maximum pull-out values.

Automatic or semiautomatic crimping machines are often used when large numbers of contacts need to be processed.

The DIN EN 60352-2 and DIN EN 60999-1 standards are among the references used to subsequently assess crimping results. In addition to a variety of electrical and mechanical tests, conductor pull-out tests are the decisive criterion.

All tools in the CRIMPFOX series from Phoenix Contact have been adjusted and tested according to the applicable standards. These tools ensure long-term, stable, gas-tight crimping and the sophisticated mechanical design reduces the manual force required by 25 percent.

Gas tightness

Gas tightness – test setup in accordance with DIN 50018

The key role of the metal parts of electrical connections becomes particularly apparent in aggressive environments. Corrosion-free contact areas are a prerequisite for low-resistance, and, therefore, high-performance connections.

This test method describes a corrosion test in condensation climates with an atmosphere that contains sulfur dioxide. Acidic compounds with a pH of less than 7 form during the test and attack the metal surfaces.

Two liters of distilled water and one liter of SO₂ gas are introduced into the test chamber. At a test temperature of 40°C, sulfurous acid forms during the test. After eight

hours of testing, the test objects dry for 16 hours with the door open. At the end of the test, a visual check of the test objects is conducted. Before and after the corrosion test, the contact resistance of the contacts is recorded according to DIN EN 60512-2-1:2002, and changes that can be attributed to the effects of corrosion are investigated.

When used correctly at contact points, Phoenix Contact crimping tools and connectors achieve a permanent gas-tight connection that cannot be impaired even by aggressive substances.



The voltage drop must not exceed 3.2 mV before or after the test, nor may it exceed 1.5 times the value measured at the start of the test.

CUTFOX/UNIFOX

Cutting and universal tools

The perfect cable cutter for every application. The CUTFOX line provides clean cuts without squeezing the cable, non-slip handles, special hardened steel, and unique cutting-edge geometry. A variety of versions are available for cutting cables up to 4" in diameter.

With a wide variety of tools suitable for different applications, the UNIFOX line of universal tools serves multiple functions, including wire tying and wire duct cutting. The product range includes VDE combination pliers, water pump pliers, wrenches, VDE needle-nose, flat-nose, and round-nose pliers, all featuring non-slip, ergonomically designed handles.

Effortless clean results

Cleanly cut cables with minimal effort using the CUTFOX line of cutting tools.

The UNIFOX versatile tools combine a variety of functions so you can always have the right tool for the job.

- ✓ Durable, with specially hardened and tempered blades
- ✓ Optimized leverage and cutting geometry for ease of use
- ✓ Ergonomic handle design for low-impact, fatigue-free use



Maximum force transmission

With the ratchet mechanism design, minimal force is required for cables up to 100mm in diameter.



Ergonomic design

Wire tie guns cut wire ties in a single step once the tension force is reached, and the remaining wire tie is automatically severed for a flush finish.



VDE-tested safety

The comprehensive range of VDE-tested-combination tools ensures all applications are covered.



CUTFOX cutting tools

Cable cutters				
Thanks to their special cutting geometry, the cable cutters ensure optimum cutting results. The ergonomic design of the handles makes for light work.				
Type	Order No.	CUTFOX-ES 1212621	CUTFOX-ES-1 1139721	CUTFOX-MPS 1139725
Diameter (cross-section)		For Kevlar fibers/braided shield 1.5 mm² (solid conductor) 6 mm² (stranded conductor)	Cut up to 8 AWG, jacket removal up to 2 AWG	Cut plastic sheets and cardboard
				
Type	Order No.	CUTFOX 12 1212128	CUTFOX 18 1212129	CUTFOX-SE 1212832
Diameter (cross-section)		Up to 12 mm Ø (up to 35 mm²)	Up to 18 mm Ø (up to 50 mm²)	Diagonal cutter, angled design, 180 mm
The cable cutters meet the applicable VDE standards and are therefore safe, even if live conductors and cables are cut.				
Type	Order No.	CUTFOX 16 VDE 1212126	CUTFOX 25 VDE 1212127	CUTFOX-LB VDE 1212527
Diameter (cross-section)		1.5 mm² (solid conductor) 6 mm² (stranded conductor) Up to 16 mm Ø (up to 50 mm²)	Up to 25 mm Ø (up to 70 mm²)	Up to 50 mm Ø (up to 6 x 16 x 0.8 mm)
				
Type	Order No.			CUTFOX-SE LM 1212833
Diameter (cross-section)				Electricians, diagonal cutter, angled design, with stripping, crimping, and bending function. Screw pincers up to M3.5/M4, 180 mm

Ratchet cable cutters				
One- and two-hand ratchet cable cutters feature a ratchet function for minimum effort and are unlockable for cutting copper and aluminum up to 100 mm in diameter (1400 mm²) without crushing.				
Type	Order No.	CUTFOX 25 1212130	CUTFOX 35 1212131	CUTFOX 45 1212132
Diameter (cross-section)		Up to 25 mm Ø (up to 185 mm²)	Up to 35 mm Ø (up to 300 mm²)	Up to 45 mm Ø (up to 300 mm²)
Our ratchet cable cutters are ideal for long-term use due to their sturdy design.				
Type	Order No.	CUTFOX 52 1212133	CUTFOX 62 1212134	CUTFOX 100 1212135
Diameter (cross-section)		Up to 52 mm Ø (up to 300 mm²)	Up to 62 mm Ø (up to 750 mm²)	Up to 100 mm Ø (up to 1400 mm²)
The CUTFOX 50 STEEL is also suitable for steel-armored cables and stranded steel rope.				
Type	Order No.	CUTFOX 50 STEEL 1212526		
Diameter (cross-section)		Up to 50 mm Ø (up to 300 mm²)		

CUTFOX cutting tools

Cable duct cutters

The cable duct cutters can easily cut through ducts and covers up to 75 mm wide. The universal limit stop allows you to make both right-angled and bevel cuts.

The PPS-CD M cable duct cutter cuts ducts and covers up to 125 mm wide and 2.5 mm thick, without burring, in seconds.



Type	Order No.	Cutfox -CD	1212474	PPS CD M	1207569
Accessories					
Replacement blade				PPS CD BLADE	1207572
Replacement counter support				PPS CD M COHO	1208995
With laminated wood panel 700 x 1200 x 50 mm					

Profile cutting tools

PPS BASIC I/M is a lightweight profile cutter.
PPS STANDARD... and PPS CLASSIC... can be fitted with two stamping bits for round and elongated holes. The PPS CLASSIC, with its quick-change mechanism, is the best choice if hole formats are changed on a frequent basis.



Type	Order No.	PPS BASIC I/M 1207585	PPS STANDARD I/M 1206230	PPS CLASSIC I/M 1206256	PPS COMPACT 1104980	PPS/ZERO CUT BLOCK 1580818
		With inch/metric measuring rail	With inch/metric measuring rail	With inch/metric measuring rail		
Type	Order No.				PPS COMPACT/ CLAMP 1105212	
Type	Order No.				PPS COMPACT/ SCALE-SET I/M 1105211	
Description		For standard DIN rails	Each for standard DIN rails	Each for standard DIN rails		
		NS15 / NS 35/7,5 / NS 35/15 / NLS-CU 3/10	NS15 / NS 32 / NS 35/7,5 / NS 35/15	NS15 / NS 32 / NS 35/7,5 / NS 35/15		
			NLS-CU 3/10 and two hole punches	NLS-CU 3/10 and two hole punches		

Accessories					
Stamping bit for elongated holes					
3.5 x 12 mm			PPS-ST (3,5x12)L	1203563	
4.5 x 12 mm			PPS-ST (4,5x12)L	1203534	
5.5 x 12 mm			PPS-ST (5,5x12)L	1202603	
6.5 x 15 mm			PPS-ST (6,5x15)L	1202593	
Stamping bit for cross holes					
3.5 x 12 mm			PPS-ST (3,5x12)Q	1203550	
4.5 x 12 mm			PPS-ST (4,5x12)Q	1203547	
5.5 x 12 mm			PPS-ST (5,5x12)Q	1203411	
6.5 x 15 mm			PPS-ST (6,5x15)Q	1203408	
Stamping bit for bore holes					
3.8 mm Ø			PPS-ST (3,8)	1204892	
4.3 mm Ø			PPS-ST (4,3)	1202616	
5.3 mm Ø			PPS-ST (5,3)	1202629	
6.4 mm Ø			PPS-ST (6,4)	1202632	
7.0 mm Ø			PPS-ST (7,0)	1204889	
8.4 mm Ø			PPS-ST (8,4)	1202726	
Hydraulic cylinder					
For connection to an existing hydraulic system			PPS HYDRAULIC CYL	1208924	
Operating pressure: 160 - 220 bar			Only for PPS STANDARD		
Single-action with spring reset, G1/4 inch connection thread					

UNIFOX universal tools

VDE diagonal cutters

The VDE-insulated diagonal cutters, with their inductively hardened precision cutting, ensure long-term, stable cutting performance and, therefore, a clean cut for both soft and hard wires (piano wire).



Type	Order No.	CUTFOX-S VDE*	1212207	CUTFOX-SP VDE*	1212206	CUTFOX SP Bolt VDE	1212831
------	-----------	---------------	---------	----------------	---------	--------------------	---------

VDE combination pliers

VOE-insulated combination pliers are available in a straight or angled form and are ideal for gripping surfaces. The pliers feature an integrated M8-M10 ring key and blade, rapid adjustment and wrench sizing, and a groove joint ideal for gripping surfaces with dual notching.



Type	Order No.	UNIFOX-C VDE*	1212202	UNIFOX-CE VDE*	1212203	UNIFOX_LM VDE	1756433
------	-----------	---------------	---------	----------------	---------	---------------	---------

VDE needle-nose, flat-nose, and round-nose pliers

The VDE-insulated needle-nose pliers are available with straight and 45° angled tips. The gripping surfaces are notched, and the integrated blades are hardened inductively.



Type	Order No.	UNIFOX-P VDE	1212204	UNIFOX-PC VDE	1212205		
------	-----------	--------------	---------	---------------	---------	--	--

The gripping surfaces of the flat-nosed and round-nose pliers are finely notched in order to grip workpieces securely without damaging them.



Type	Order No.	UNIFOX-F VDE	1212363	UNIFOX-R VDE	1212364	UNIFOX-PE VDE*	1212529
------	-----------	--------------	---------	--------------	---------	----------------	---------

Multifunctional pliers with several functions in one tool, stripping and crimping area for wire-end ferrules, insulated ring cable lugs with cable cutters, VDE tested.



Type	Order No.	UNIFOX-MP 6-1 VDE	1662200	UNIFOX-MP 7-1 VDE	1662199		
------	-----------	-------------------	---------	-------------------	---------	--	--

* Optimally positioned fulcrums require only a small amount of manual force when using these tools.

UNIFOX universal tools

Water pump pliers

Water pump wrench, with groove joint, grip areas with dual notching.

Wrench, with push button, smooth gripping surface, parallel adjustable. Available in 3 sizes.

						
Type	Order No.	UNIFOX-WP 1212365	UNIFOX-Wrench 1212835	UNIFOX-WRENCH P40 1669347	UNIFOX-WRENCH P52 1756471	UNIFOX-WRENCH P68 1669350
Description				For wrench width up to 68mm, size: 305mm	For wrench width up to 52mm, size: 255mm	For wrench width up to 68mm, size: 305mm

Contact removal and assembly tools

Contact removal tools are designed for turned contacts, and contact assembly tools are designed for crimp contacts.

					
Type	Order No.	UNIFOX RT-CK 1.6 1072069	UNIFOX RT-CK 2.5 1072067	UNIFOX RT-CK 4.0 1072064	UNIFOX MT-CK 1.6/2.5 1089092

Blind rivet pliers

The UNIFOX-RVT P rivet setting tools are designed for plastic body-bound rivets.

				
Type	Order No.	UNIFOX RVT P 4 1212478	UNIFOX RVT P 6 1212509	RVT-PA 4 RVT-PA 6 3240498 3240499

Wire tie guns

Tension and cut cable binders in one step with these ergonomic tools for plastic and stainless-steel cable binders. The continuously adjustable tension force is indicated by a scale in the handle area. When the tension force is reached, the remainder is automatically severed for a flush finish.

				
Type	Order No.	UNIFOX-CT 4,8 1212475	UNIFOX-CT 4,8P 1212609	UNIFOX-CT M 7,9 1212610
Description		For plastic cable binders up to 4.8 mm wide	For plastic cable binders up to 4.8 mm wide	For stainless-steel cable binders up to 7.9 mm wide

WIREFOX

Stripping tools


Wire stripping and dismantling tools for a spectrum of wire and cable insulations.

The WIREFOX line features hardened blades with special geometries, integrated cutters, and self-adjustment for a defined range of AWGs. These industrial wire stripping tools are safe to touch with no sharp edges and impress with their ergonomic properties.

Effortless clean results

Process all types of conductors with standard or special insulation quickly and safely.

- ✓ Easily replaceable blade cassettes provide simple versatility
- ✓ Ergonomic handle design provides fatigue-free and nonslip handling
- ✓ Durable, high-quality components and materials

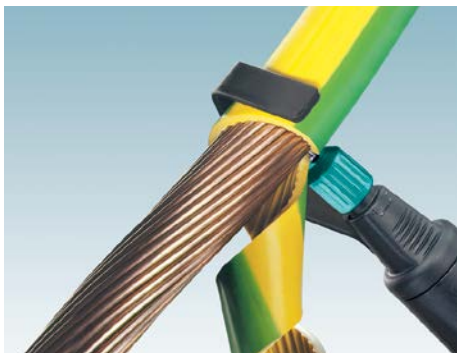


Precise and safe stripping

The WIREFOX stripping tools can strip all types of conductors and cables quickly, precisely, and reliably. Appropriate tools are also available for special types of insulation.



Easy blade replacement

The design of the pliers allows blade cassettes to be replaced easily, which means that special types of insulation can be processed using a standard tool.

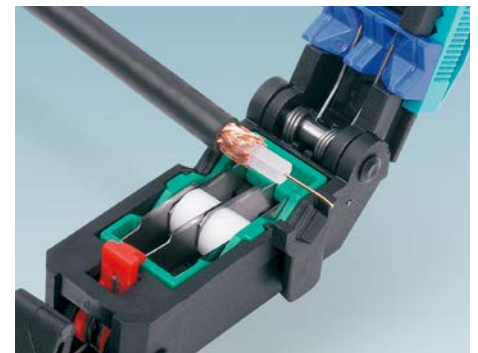

Multistage stripping

The CUTFOX-D CX stripping tools enable multistage stripping of data and round cables in a single step. The cable remains undamaged with the central fine adjustment of the stripping blade.



WIREFOX stripping tools

Stripping pliers for conductors and cables

WIREFOX stripping tools feature an automatic adjustment mechanism for a wide range of insulation types and conductor diameters. Particularly useful are the integrated wire cutter and adjustable limit stop for the stripping length. Replaceable, interchangeable stripping blades make this wire stripping tool compatible with a wide range of wires.		 FLAT BLADE		 FLAT BLADE		 OVAL BLADE	
Type	Order No.	WIREFOX 10	1212150	WIREFOX-E 10	1212706	WIREFOX 16	1212155
Conductor / cable	[mm ²] / AWG	0.02 – 10 / 34 – 8		0.02 – 10 / 34 – 8		4 – 16 / 12 – 5	
Strip length up to ...	[mm]	18		18		18	
Insulation type		Standard		Standard		Standard	
Max wire cutter diameter stranded	[mm ²] / AWG	10 / 8		10 / 8		10 / 8	
Max wire cutter diameter solid	[mm ²] / AWG	1.5 / 16		1.5 / 16		1.5 / 16	
Accessories							
Replacement blade		WIREFOX 10/SB	1212152	WIREFOX 10/SB	1212152	WIREFOX 16/SB	1212153
Clamping jaws		WIREFOX 16/CJ	1200286	WIREFOX 10/CJ	1200286	WIREFOX 16/CJ	1200287
The dies are compatible with all types of pliers and can be replaced in just a few steps. Basic pliers can therefore be used to cover a range of applications.		 OVAL BLADE		 V-BLADE		 V-BLADE	
Type	Order No.	WIREFOX-E 16	1212707	WIREFOX 4	1212156	WIREFOX-E 4	1212704
Conductor / cable	[mm ²] / AWG	4 – 16 / 12 – 5		0.1 – 4 / 28 – 12		0.1 – 4 / 28 – 12	
Strip length up to ...	[mm]	18		18		18	
Insulation type		Standard		Special insulation, e.g., PTFE		Special insulation, e.g., PTFE	
Max wire cutter diameter stranded	[mm ²] / AWG	10 / 8		10 / 8		10 / 8	
Max wire cutter diameter solid	[mm ²] / AWG	1.5 / 16		1.5 / 16		1.5 / 16	
Accessories							
Replacement blade		WIREFOX 16/SB	1212153	WIREFOX 4/SB	1212151	WIREFOX 4/SB	1212151
Clamping jaws		WIREFOX 16/CJ	1200286	WIREFOX 16/CJ	1200286	WIREFOX 16/CJ	1200286
		 V-BLADE		 V-BLADE		 FLAT BLADE	
Type	Order No.	WIREFOX 6SC	1212158	WIREFOX-E 6SC	1212705	WIREFOX 2,5	1212368
Conductor / cable	[mm ²] / AWG	1.5 – 6 / 16 – 10		1.5 – 6 / 16 – 10		0.08 – 2.5 / 28 – 14	
Strip length up to ...	[mm]	18		18		15	
Insulation type		Short-circuit-proof		Short-circuit-proof		Standard	
Max wire cutter diameter stranded	[mm ²] / AWG	10 / 8		10 / 8		10 / 8	
Max wire cutter diameter solid	[mm ²] / AWG	1.5 / 16		1.5 / 16		1.5 / 16	
Accessories							
Replacement blade		WIREFOX 6SC/SB	1212314	WIREFOX 6SC/SB	1212314	WIREFOX 2,5/SB	1212369
Replacement limit stop						WIREFOX 2,5/WS	1212370
Clamping jaws		WIREFOX 16/CJ	1200286	WIREFOX 16/CJ	1200286	WIREFOX 16/CJ	1200286

Stripping pliers for sensor/actuator cables

The WIREFOX SAC is suitable for safely stripping sensor/actuator (SAC) and similar cables. The specially shaped blade geometries prevent damage to the conductors inside.						
Type	Order No.	WIREFOX 16-1	WIREFOX SAC	WIREFOX SAC-1	WIREFOX ASI	WIREFOX FC
		1212157	1212623	1212757	1212154	1212619
Conductor / cable diameter	[mm]	6 - 16 mm ² / AWG: 10 - 6	4.4 - 7 / AWG: 12 - 10	3.0 - 4.4 / AWG: 12 - 10	AS-Interface flat-ribbon conductor	Flat-ribbon conductors
Stripping length up to ...	[mm]	Any	Any	Any	Any	Any stripping width up to 12 mm
Insulation type		Standard	SAC cables	SAC cables		
Accessories						
Replacement blade		WIREFOX 16-1/SB	WIREFOX SAC/SB	WIREFOX SAC-1/SB	WIREFOX ASI/SB	WIREFOX FC/SB
		1204944	1200282	1200283	1208076	1200284

WIREFOX stripping tools

VDE stripping pliers

The WIREFOX-MP VDE is a multifunctional tool that is suitable for both stripping and dismantling indoor installation cables, e.g., NYM. The VDE-insulated stripping pliers can be used to strip conductors up to 10 mm². The adjusting screw with locking nut ensures consistent stripping quality in standard production.



Type	Order No.	WIREFOX-MP VDE	1212528	WIREFOX 10 VDE	1212366	WIREFOX-D SHIELD	1212172
Conductor / cable	[mm ²] / AWG	0.2 – 10 / 24 – 8		0.2 – 10 / 24 – 8		8 – 9	
Stripping length up to ...	[mm]	20		20			
Insulation type		Standard		Standard			

Stripping tools for dismantling

The WIREFOX-D 11 dismantling tool strips single and multi-strand signal, control, and fiberglass cables up to 11 mm in diameter. The WIREFOX-D SR 6 is ideal for use with MC 3,4 and SOLAROK contacts, while the WIREFOX-D SR 6-1 is suitable for SUNCLIX field plugs.



Type	Order No.	WIREFOX-D 11	1212160	WIREFOX-D SR 6	1212507	WIREFOX-D 13	1212162
				WIREFOX-D SR 6-1	1212511		
				WIREFOX-CX 6,35	1212733		
Conductor/cable diameter	[mm]	2.5 – 11				8 – 13	
Max. insulation thickness	[mm]	1.0				–	
Conductor	[mm ²]			2.5 – 6 / RG 59 and RG 6			
Stripping length	[mm]	Any		8.5 / 15 / 6.35			
Replacement blade		WIREFOX-D 11/SB					


The WIREFOX-D 40 stripping tool is used to strip cables up to 40 mm in diameter professionally and safely. The swivel blade can be used to make cuts around, lengthwise, or spiral down the cable.



Type	Order No.	WIREFOX-D 40	1212161	WIREFOX-D 16	1212173		
				WIREFOX-D 28	1212174		
Conductor/cable diameter	[mm]	4.5 – 40		4 – 16, 8 – 28			
Max. insulation thickness	[mm]	4.5		–		–	
Replacement blade		WIREFOX-D 40/SB					

Stripping tools for multistage dismantling of coaxial cables

The WIREFOX-D CX... stripping tools allow you to easily perform multistage stripping of data and round cables in a single step. The cable remains undamaged due to the central fine adjustment of the stripping blade. The blade cassettes are compatible with the respective tool.



Type	Order No.	Accessories - replacement blade		
2-stage/strip-off dimension l1 = 6.0 mm	WIREFOX-D CX-1	1212163	WIREFOX-D CX-1/SB	1212303
2-stage/strip-off dimension l1 = 9.2 mm	WIREFOX-D CX-2	1212164	WIREFOX-D CX-2/SB	1212304
2-stage/strip-off dimension l1 = 12 mm	WIREFOX-D CX-3	1212165	WIREFOX-D CX-3/SB	1212305
2-stage/strip-off dimension l1 = 6.8 mm	WIREFOX-D CX-4	1212166	WIREFOX-D CX-4/SB	1212306
3-stage/strip-off dimension l1 = 5.5 mm and l2 = 5.5 mm	WIREFOX-D CX-5	1212167	WIREFOX-D CX-5/SB	1212307
3-stage/strip-off dimension l1 = 2.7 mm and l2 = 8.3 mm	WIREFOX-D CX-6	1212168	WIREFOX-D CX-6/SB	1212308
3-stage/strip-off dimension l1 = 6.0 mm and l2 = 6.0 mm	WIREFOX-D CX-7	1212169	WIREFOX-D CX-7/SB	1212309
3-stage/strip-off dimension l1 = 2.5 mm and l2 = 6.8 mm	WIREFOX-D CX-8	1212170	WIREFOX-D CX-8/SB	1212310
3-stage/strip-off dimension l1 = 3.5 mm and l2 = 7.5 mm	WIREFOX-D CX-9	1212171	WIREFOX-D CX-9/SB	1212311

CRIMPFOX

Crimping tools

An extensive series of innovative, industrial crimping pliers, the CRIMPFOX line features a special power transmission method that reduces the amount of manual force required by 25 percent. Optimized hand geometry and integrated pressure locking ensure solid, high-quality results. The portfolio offers a variety of handle sizes to ensure the right fit, and Phoenix Contact ferrule crimpers used with our ferrules are UL Listed.

Professional crimping

Mechanical crimping pliers can be used to crimp all types of contacts safely and effortlessly.

- ✓ Interchangeable dies allow maximum flexibility
- ✓ Ergonomic handle design with nonslip material for easy handling
- ✓ Durable, high-quality components and raw materials



Professional crimping

Depending on the area of application, you can choose between tools with lateral or front crimp entry.



High-quality crimping

Precise dies and an integrated pressure lock ensure long-term, stable, gastight crimping. The pressure lock makes certain that the crimp cycle is carried out in full. If required, it can be unlocked with one hand.



Flexibility

Rotating crimping pliers with front or side entry enable flexibility and comfort, whether working at a workstation or directly inside a cabinet.



CRIMPFOX crimping tools



Crimping pliers for ferrules

The self-adjusting die of the crimping pliers automatically adapts to the size of the connector and impresses with its quick and reliable contact processing method.							
Type	Order No.	CRIMPFOX 6	1212034	CRIMPFOX 2,5-M	1212719	CRIMPFOX 6-M	1212720
Conductor	[mm²] / AWG	0.25 – 6 / 24 – 10		0.25 – 2.5 / 24 – 14		0.25 – 6 / 24 – 10	
Accessories							
Replacement die		CRIMPFOX 6/DIE	1212035	CRIMPFOX/SPR-1		1212069	
Replacement recuperating spring		CRIMPFOX/SPR-3	1212036				
The CRIMPFOX pliers are equipped with a pressure lock (unlockable). The innovative design and ergonomically shaped handles reduce the amount of force required.							
Type	Order No.	CRIMPFOX 10T-F	1134913	CRIMPFOX 4in1 Tool only 4in1 set	1200101 1200102	CRIMPFOX DUO 10	1031721
Conductor	[mm²] / AWG	0.14 – 10 / 26 – 8		0.5 – 25 / 20 – 14		0.14 – 16 (2 x 0.5 – 2 x 6) / 24 – 6 (2 x 20 – 2 x 10)	
Accessories							
Replacement recuperating spring		CRIMPFOX/SPR-1 1212069					
These compact crimping pliers are designed to reduce effort with a built-in ratcheted mechanism to ensure a proper and complete crimp. The handles provide a comfortable ergonomic fit and a nonslip pressure point. The self-adjusting dies automatically adapt to the cross-section. 'S' = square crimp profile 'H' = hexagonal crimp profile							
Type	Order No.	CRIMPFOX Centrus 6S	1213144	CRIMPFOX Centrus 10S	1213154	CRIMPFOX Centrus 6S-NC	1202882
		Centrus 6H	1213146	Centrus 10 H	1213156	NO COVER HANDLE	1202880
Conductor	[mm²] / AWG	0.14 – 6 / 24 – 10		0.14 – 10 / 24 – 8		0.14 – 6 / 24 – 10	
Accessories							
Replacement die		CRIMPFOX/SPR-21212047		CRIMPFOX/SPR-21212047			
These crimping pliers are used to process ferrules up to 50 mm². The ergonomically designed handles and the optimized mechanical transmission ensure an optimum grip and reduce the amount of force required by 25%.							
Type	Order No.	CRIMPFOX 10	1212721	CRIMPFOX 25R	1212039	CRIMPFOX 50R	1212041
Conductor	[mm²] / AWG	4 – 10 / 12 – 8		10 – 25 / 8 – 4		35 – 50 / 2 – 1	
Accessories							
Replacement die				CRIMPFOX 25R/DIE	1212040	CRIMPFOX 50R/DIE	1212042
Replacement recuperating spring		CRIMPFOX/SPR-1	1212069	CRIMPFOX/SPR-1	1212069	CRIMPFOX/SPR-1	1212069

CRIMPFOX crimping tools



Crimping pliers for insulated cable lugs and connectors

The color-coded dies for the CRIMPFOX RCI pliers clearly indicate the cross-section. The precision-manufactured dies ensure consistently high levels of quality during contact processing.



Type	Order No.
Conductor	[mm ²] / AWG

CRIMPFOX-RCI 1	1212055
0.14 – 1 / 26 – 18	

CRIMPFOX-RCI 2,5	1212053
0.75 – 2.5 / 20 – 14	

Accessories

Replacement die	CRIMPFOX-RCI 1/DIE	1212056
-----------------	--------------------	-------------------------

CRIMPFOX-RCI 2,5/DIE	1212054
----------------------	-------------------------

The RCI...M crimping pliers have a compact frame and optimized leverage, with minimum actuation force.



Type	Order No.
Conductor	[mm ²] / AWG

CRIMPFOX-RCI 1-M	1212727
0.14 – 1 / 26 – 18	

CRIMPFOX-RCI 2.5-M	1212728
0.75 – 2.5 / 20 – 14	

CRIMPFOX-RCI 6-M	1212730
0.75 – 6 / 20 – 10	

Accessories

Replacement die			CRIMPFOX-RCI 6/DIE	1212058
-----------------	--	--	--------------------	-------------------------

Even large cross-sections can be processed easily and with very little force using this series of pliers. The obligatory pressure lock ensures consistent, high-quality results every time.



Type	Order No.
Conductor	[mm ²] / AWG

CRIMPFOX-RCI 6	1212057
0.75 – 6 / 20 – 10	

CRIMPFOX-RCI 6-1	1212059
0.75 – 6 / 20 – 10	

CRIMPFOX-RCI DIN 6	1212729
0.75 – 6 / 20 – 10	

Accessories

Replacement die	CRIMPFOX-RCI 6/DIE	1212058
-----------------	--------------------	-------------------------

CRIMPFOX-RCI 6-1/DIE	1212290
----------------------	-------------------------

CRIMPFOX-RCI 6/DIE	1212058
--------------------	-------------------------

The CRIMPFOX-HS 6 is suitable for crimping shrink connectors.



Type	Order No.
Conductor	[mm ²] / AWG

CRIMPFOX-HS 6	1212722
0.5 – 6 / 20 – 10	

CRIMPFOX crimping tools



Crimping pliers for uninsulated cable lugs and tubular cable lugs

The CRIMPFOX RC crimping pliers are used to process uninsulated cable lugs. They have an unlockable pressure lock and marked die stations for precise processing of corresponding cross-sections.



Type	Order No.	CRIMPFOX-RC 2,5	1212063	CRIMPFOX-RC 6	1212710
Conductor	[mm²] / AWG	0.75 – 2.5 / 22 – 14		0.5 – 6 / 20 – 10	

Accessories

Replacement die	CRIMPFOX-RC 2,5/DIE	1212064		
-----------------	---------------------	---------	--	--

The CRIMPFOX RC...M crimping pliers have a compact frame and optimized leverage, with minimum actuation force.



Type	Order No.	CRIMPFOX-RC 2,5-M	1212723	CRIMPFOX-RC 6-M	1212724
Conductor	[mm²] / AWG	0.75 – 2.5 / 22 – 14		0.5 – 6 / 20 – 10	

With the CRIMPFOX RC... pliers, the actuation force required is kept to a minimum during work, even with larger cross-sections, due to the optimized leverage. The CRIMPFOX RC... and RC... M pliers have a pressure lock that can be unlocked without additional tools.



Type	Order No.	CRIMPFOX-RC 10	1212061	CRIMPFOX-RC 25	1212065
Conductor	[mm²] / AWG	4 – 10 / 12 – 8		10 – 25 / 8 – 4	

Accessories

Replacement die	CRIMPFOX-RC 10/DIE	1212062	CRIMPFOX-RC 25/DIE	1212299	
-----------------	--------------------	---------	--------------------	---------	--

The CRIMPFOX-RCT crimping pliers are used to process standard tubular cable lugs.



Type	Order No.	CRIMPFOX-RCT 25-1	1212066	CRIMPFOX-RCT 16-1	1212731	CRIMPFOX-RCT 70-1	1212732
Conductor	[mm²] / AWG	10 – 25 / 8 – 4		4 – 16 / 12 – 4		10 – 70 / 8 – 00	

Accessories

Replacement die	CRIMPFOX-RCT 25/DIE	1212300			
-----------------	---------------------	---------	--	--	--

CRIMPFOX crimping tools



Crimping pliers for uninsulated slip-on sleeves

The CRIMPFOX-SC... crimping pliers are used to process uninsulated slip-on blade connectors and slip-on sleeves up to 6 mm². The marked die stations enable precise processing. The CRIMPFOX-SCA 2,5-M is designed for processing angled slip-on sleeves.



Type	Order No.	CRIMPFOX-SC 1,5	1212048	CRIMPFOX-SC 1,5-M	1212725	CRIMPFOX-SCA 2,5-M	1212726
Conductor	[mm ²] / AWG	0.1 – 1.5 / 26 – 16		0.1 – 1.5 / 26 – 16		1 – 2.5 / 18 – 14	

Accessories							
Replacement die		CRIMPFOX-SC 1,5/DIE	1212049				
Replacement recuperating spring		CRIMPFOX/SPR-3	1212036	CRIMPFOX/SPR-1	1212069	CRIMPFOX/SPR-1	1212069

The CRIMPFOX-SC 6L is equipped with a locator as an additional positioning aid.



Type	Order No.	CRIMPFOX-SC 6	1212050	CRIMPFOX-SC 6L	1212052		
Conductor	[mm ²] / AWG	0.5 – 6 / 22 – 10		0.5 – 6 / 22 – 10			

Accessories							
Replacement die		CRIMPFOX-SC 6/DIE	1212051	CRIMPFOX-SC 6/DIE	1212051		
Replacement recuperating spring		CRIMPFOX/SPR-1	1212069	CRIMPFOX/SPR-1	1212069		



Crimping pliers for turned contacts

The CRIMPFOX-TC... crimping pliers are used to process turned contacts up to 10 mm². The integrated locator enables contacts with pin diameters of 1.6, 2.5, and 4 mm to be positioned precisely in the die.



Type	Order No.	CRIMPFOX-TC HC 4	1297083	CRIMPFOX-TC HC 10	1314533	CRIMPFOX-TC MP	1212510	CRIMPFOX-TC MP-6	1202888
Conductor	[mm ²] / AWG	0.5 – 4 / 22 – 12		4 – 10 / 12 – 8		0.08 – 2.5 / 28 – 14		0.14 – 6 / 26 – 10	

Accessories									
Replacement die		CRIMPFOX-TC HC 4/DIE	1324130	CRIMPFOX-TC HC 10/DIE	1324135				
Replacement recuperating spring		CRIMPFOX/SPR-1	1212069	CRIMPFOX/SPR-1	1212069				



Crimping pliers for fiber optic connectors

The CRIMPFOX-FO is used to process fiber-optic connectors. The five marked die stations enable precise processing of different contact sizes.



Type	Order No.	CRIMPFOX-FO 5,41	1212099		
Hex wrench width across flats					
Die stations 1 / 2 / 3 / 4 / 5	[mm]	3.25 / 3.84 / 4.52 / 5.0 / 5.41			

Accessories					
Replacement die		CRIMPFOX-FO 5,41/DIE	1212294		


CRIMPFOX crimping tools



Crimping pliers for coaxial connectors

The CRIMPFOX-CX... crimping pliers are used to process coaxial connectors. Equipped with a pressure lock, the pliers provide consistently high-quality crimping.

For two- and three-stage stripping tools, see page 21.

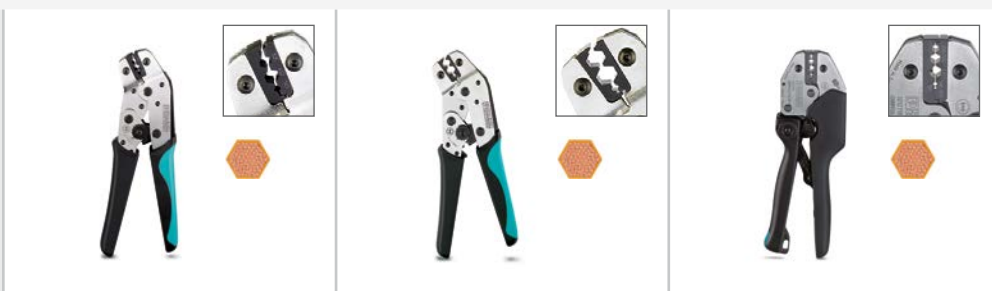

Type	Order No.	CRIMPFOX-CX 4,52	1212094	CRIMPFOX-CX 6,48	1212095	CRIMPFOX-CX 7,06 HD-M	1212718
Hex wrench width across flats							
Die stations 1 / 2 / 3	[mm]	1.69 / 3.25 / 4.52		1.69 / 5.41 / 6.48		1.04 / 4.52 / 6.48 / 7.06	
Accessories							
Replacement spring		CRIMPFOX/SPR-1	1212069	CRIMPFOX/SPR-1	1212069	CRIMPFOX/SPR-1	1212069
Replacement die		CRIMPFOX-CX 4,52/DIE	1212284	CRIMPFOX-CX 6,48/DIE	1212286		

The innovative mechanical design of these pliers means that up to 25 percent less force is required compared to conventional pliers.



Type	Order No.	CRIMPFOX-CX 9,14	1212096	CRIMPFOX-CX 10,54	1212097	CRIMPFOX-CX 10,90	1212098
Hex wrench width across flats							
Die stations 1 / 2	[mm]	1.73 / 8.23 / 9.14		2.54 / 10.54		2.54 / 10.90	
Accessories							
Replacement spring		CRIMPFOX/SPR-1	1212069	CRIMPFOX/SPR-1	1212069	CRIMPFOX/SPR-1	1212069
Replacement die		CRIMPFOX-CX 9,14/DIE	1212293	CRIMPFOX-CX 10,54/DIE	1212291	CRIMPFOX-CX 10,90/DIE	1212292

The CRIMPFOX-CX... -M pliers have an extremely compact body.



Type	Order No.	CRIMPFOX-CX 4,52-M	1212713	CRIMPFOX-CX 5,41-M	1212712	CRIMPFOX-CX 6,48-M	1212714
Hex wrench width across flats							
Die stations 1 / 2 / 3 / 4 / 5 / 6	[mm]	1.69 / 3.25 / 4.52		0.7 / 1.07 / 1.69 / 3.25 / 4.52 / 5.41		1.69 / 5.41 / 6.48	

In the case of the CRIMPFOX-CX... crimping pliers, the conductor is inserted laterally.



Type	Order No.	CRIMPFOX-CX 10,90-1	1212715		
Hex wrench width across flats					
Die stations 1 / 2 / 3 / 4	[mm]	1.69 / 2.54 / 5.41 / 10.90			

CRIMPFOX crimping tools



Crimping pliers for D-SUB contacts

The CRIMPFOX-D SUB crimping pliers with integrated contact locator are used to process high-density and D-SUB 1 contacts from 0.08 to 0.5 mm².



Type	Order No.	CRIMPFOX-DSUB 5	1212111	CRIMPFOX-DSUB 5-1	1212711
Conductor	[mm ²] / AWG	0.08 – 0.5 / 28 – 22		0.05 – 0.5 / 30 – 22	
Accessories					
Replacement die		CRIMPFOX-DSUB 5/DIE	1212287		



Crimping pliers for crimp snap-in contacts

These crimping pliers are specially designed to work with Phoenix Contact contacts from the COMBICON product line.



Type	Order No.	CRIMPFOX MT 2,5	1204038	CRIMPFOX-P CC 0.75 L	1064998	CRIMPFOX-P CK 1.6 ER 2.5 OIC-L	1069228
Conductor	[mm ²] / AWG	0.5 – 2.5 / 20 – 12		0.14 – 0.75/24 – 20		0.14 – 2.5/24 – 14	
Contacts							
		MSTBC-MT 0,5-1,0	3190564	PTCM-MP-P 0,14-0,5	1013781	CK1,6-ER-1,00BU OIC AG	1004362
		MSTBC-MT 1,5-2,5	3190551	PTCM-MP-P 0,34-0,75	1013780	CK1,6-ER-1,00ST OIC AG	1004360
		ICC-MT 0,5-1,0	3190577	PTCM-MP-PI 0,14-0,5	1013990	CK1,6-ER-2,50BU OIC AG	1004366
		ICC-MT 1,5-2,5	3190580	PTCM-MP-PI 0,34-0,75	1013989	CK1,6-ER-2,50ST OIC AG	1004365
		STG-MTN 0,5-1,0	3190438	MCC 0,5-MP AU 0,14-0,5	1013425		
		STG-MTN 1,5-2,5	3190506	MCC 0,5-MP AU 0,34-0,75	1013419		
Accessories							
Replacement die		CRIMPFOX MT 2,5 DIE	1208050				



Crimping pliers for solar connectors

The CRIMPFOX-SR 6 pliers are used to process MC3 and MC4 solar connectors from Multi-Contact and SOLARLOK connectors from Tyco. An integrated locator enables easy processing with optimum crimping results.



Type	Order No.	CRIMPFOX-SR 6-1	1212467	CRIMPFOX-SR 6-2	1212468	CRIMPFOX-SR 6-3	1212469
Conductor	[mm ²] / AWG	2.5 – 6/14 – 10		2.5 – 6/14 – 10		2.5 – 6/14 – 10	
For solar connectors		MC3		MC4		SOLARLOK	

CRIMPFOX crimping tools



Crimping pliers for coaxial CATV connectors

The precision-manufactured dies enable optimum crimping of CATV contacts.



Type	Order No.	CRIMPFOX-CATV 8,23	1212716	CRIMPFOX-CATV 8,23-1	1212717
Conductor	[mm]	1.69 / 8.23		6.65 / 8.23 / 9.70	



Universal pliers for data plugs and accommodating various dies

The CRIMPFOX-C D is a universal tool for use with data plugs. One of its key features is the way the dies can be quickly replaced without the need for tools.



Type	Order No.	CRIMPFOX-C D	1212734	
Die for unshielded RJ11 connectors				CRIMPFOX-C RJ11/DIE 1212735
Die for unshielded RJ22 connectors				CRIMPFOX-C RJ22/DIE 1212736
Die for unshielded RJ45 connectors				CRIMPFOX-C RJ45/DIE 1212737
Die for unshielded RJ45 connectors, universal				CRIMPFOX-C RJ45U/DIE 1212738
Die, 10-pos.				CRIMPFOX-C 10P/DIE 1212739
Die for DEC MML connectors				CRIMPFOX-C MM3/DIE 1212740
Crimp insert for shielded connectors of the DMCC 0.5 series – 1-pair shielded				CRIMPFOX-C DMCC 1P/DIE 1235253
Crimp insert for shielded connectors of the DMCC 0.5 series – 2-pair shielded				CRIMPFOX-C DMCC 2P/DIE 1235259
Crimp insert for shielded connectors of the DMCC 0.5 series – 4-pair shielded				CRIMPFOX-C DMCC 4P/DIE 1235258
Connected data cable for various diameters starting from 5 mm				CRIMPFOX-C DMCC 5/DIE 1235257
Connected data cable for various diameters up to 7 mm				CRIMPFOX-C DMCC 7/DIE 1235256



COMBICON crimp connector

The Crimpfox-P CDC is a crimper designed exclusively for crimping CDC-MP contacts for SKEDD. It features a very precise parallel action frame with consistent crimping performance.



Type	Order No.				
CDC-MP 1,14-0,5		Crimpfox-P CDC 0,5L	1142831	CDC-MP 0,14-0,5	1016664
CDC-MP 0,5-1,5		Crimpfox-P CDC 1,5L	1142832	CDC-MP 0,5-1,5	1016662
CDC-MP 1,5-2,5		Crimpfox-P CDC 2,5 L	1142833	CDC-MP 1,5-2,5	1016660

CRIMPFOX crimping tools

Universal pliers for accommodating various crimp inserts

A key feature of the CRIMPFOX-M is how easily the crimp inserts can be quickly replaced without the need for tools. The variety of inserts makes them a space-saving universal tool for all applications.



Type	Order No.	CRIMPFOX-M	1212072	CRIMPFOX-M SET	1212093
		Basic pliers without die		Contents: CRIMPFOX-M and 4 dies	
				1212074, 1212079, 1212080, 1212081	
Accessories					
Die, for ferrules					
0.25 - 10 mm ² / 22 - 8 AWG		CRIMPFOX-M 10/DIE	1212080	CRIMPFOX-M 10/DIE	1212080 (included in the set)
16 - 25 mm ² / 6 - 4 AWG		CRIMPFOX-M 25/DIE	1212081	CRIMPFOX-M 25/DIE	1212081 (included in the set)
35 - 50 mm ² / 2 - 1/0 AWG		CRIMPFOX-M 50/DIE	1212082		
Die, for insulated cable lugs					
0.5 - 1.5 and 1.5 - 2/5 mm ² / 20 - 16 and 16 - 24 AWG		CRIMPFOX-M RCI 2,5/DIE	1212074	CRIMPFOX-M RCI 2,5/DIE	1212074 (included in the set)
0.1 - 0.4 and 4 - 10 mm ² / 18-12 and 12 - 10 AWG		CRIMPFOX-M RCI 6/DIE	1212073		
Die, for uninsulated cable lugs					
0.75 - 2.5 mm ² / 18 - 14 AWG		CRIMPFOX-M RC 2,5/DIE	1212078		
0.5 - 6 mm ² / 20 - 10 AWG		CRIMPFOX-M RC 6/DIE	1212079	CRIMPFOX-M RC 6/DIE	1212079 (included in the set)
4 - 10 mm ² / 12 - 8 AWG		CRIMPFOX-M RC 10/DIE	1212077		
4 - 6 mm ² and 10 mm ² / 12 - 8 and 8 AWG		CRIMPFOX-M RC 10-1/DIE	1212744		
Die, for uninsulated slip-on sleeves					
0.1 - 1 mm ² / 26 - 18 AWG		CRIMPFOX-M SC 1/DIE	1212083		
0.5 - 2.5 mm ² / 20 - 14 AWG		CRIMPFOX-M SC 2,5/DIE	1212084		
0.5 - 6 mm ² / 20 - 10 AWG		CRIMPFOX-M SC 6/DIE	1212085		
0.5 - 6 mm ² / 20 - 10 AWG, wide, flat crimp		CRIMPFOX-M SC 6-FL/DIE	1212741		
1.0 - 2.5 mm ² / 18 - 14 AWG, for angled slip-on sleeves, 6.3 mm		CRIMPFOX-M SCA 2,5/DIE (left insertion)	1212742		
1.0 - 2.5 mm ² / 18 - 14 AWG, for angled slip-on sleeves, 8 mm		CRIMPFOX-M SCA 2,5-1/DIE (right insertion)	1212743		
Die, for coaxial connectors					
RG 174, RG 179, BNC, TNC		CRIMPFOX-M CX 1/DIE	1212087		
RG 58, RG 59, RG 62, RG 71, BNC, TNC		CRIMPFOX-M CX 2/DIE	1212088		
CATV RG 6,59		CRIMPFOX-M CX 3/DIE	1212089		
BNC, TNC, RG6, 1.73, 6.48, 8.23		CRIMPFOX-M CX 4/DIE	1212745		
BNC, TNC, 0.70, 3.25, 3.85		CRIMPFOX-M CX 5/DIE	1212746		
BNC, TNC, 1.07, 6.48, 8.23		CRIMPFOX-M CX 6/DIE	1212747		
BNC, TNC, 1.72, 5.41		CRIMPFOX-M CX 7/DIE	1212748		
BNC, TNC, 1.72, 8.23		CRIMPFOX-M CX 8/DIE	1212749		
BNC, TNC, 1.72, 5.41		CRIMPFOX-M CX 9/DIE	1212750		
BNC, TNC, 1.20, 5.41		CRIMPFOX-M CX-10/DIE	1212751		
BNC, TNC, 1.73, 10.90		CRIMPFOX-M CX 11/DIE	1212752		
BNC, TNC, 1.46, 5.18		CRIMPFOX-M CX 12/DIE	1212753		
Die, for unshielded RJ45 connectors		CRIMPFOX-M RJ45/DIE	1212090		
Die, for unshielded RJ11 connectors		CRIMPFOX-M RJ11/DIE	1212091		
Die, for shrink butt connectors					
0.1 - 0.4 mm ² and 4 - 6 mm ²		CRIMPFOX-M HS-1/DIE	1212282		
0.5 - 1.5 mm ² and 1.5 - 2.5 mm ²		CRIMPFOX-M HS/DIE	1219092		
Die, for solar connectors					
MC3, Multi-Contact, 2.5 - 6 mm ²		CRIMPFOX M SR 6-1/DIE	1212471		
MC4, Multi-Contact, 2.5 - 6 mm ²		CRIMPFOX M SR 6-2/DIE	1212472		
SOLARLOK, Tyco, 2.5 - 6 mm ²		CRIMPFOX M SR 6-3/DIE	1212473		
Die, for fiber optics connectors					
ST/SC/SMA/SMB/SFR		CRIMPFOX-M FO/DIE	1212086		

CRIMPFOX crimping tools

Universal pliers for accommodating various crimp inserts

The wide variety of available dies means that the CRIMPFOX-C ... pliers can be used as universal crimping pliers up to 120 mm². Easily foldable jaw holders allow the dies to be changed quickly. A mechanical drive system keeps the level of force required to an absolute minimum.



Type	Order No.	CRIMPFOX-C50	1212340	CRIMPFOX-C120	1212318
Accessories: die combinations for ferrules 					
Upper die part					
50 mm ² , 70 mm ²				CRIMPFOX-C120 AI 70/M-DIE	1212335
95 mm ²				CRIMPFOX-C120 AI 95/M-DIE	1212336
Lower die part					
50 mm ²				CRIMPFOX-C120 AI 50/F-DIE	1212337
70 mm ²				CRIMPFOX-C120 AI 70/F-DIE	1212338
95 mm ²				CRIMPFOX-C120 AI 95/F-DIE	1212339
120 mm ² (die pair)				AI 120/DIE	1209910
Accessories: die combinations for uninsulated cable lugs 					
Upper die part					
6 - 35 mm ²		CRIMPFOX-C50 RC 35/M-DIE	1212343		
6 - 70 mm ²				CRIMPFOX-C120 RC 70/M-DIE	1212331
Lower die part					
25 mm ²		CRIMPFOX-C50 RC 25/F-DIE	1212344		
35 mm ²		CRIMPFOX-C50 RC 35/F-DIE	1212345		
10, 16, 25, 35 mm ²				CRIMPFOX-C120 RC 35/F-DIE	1212332
6, 50 mm ²				CRIMPFOX-C120 RC 50/F-DIE	1212333
10, 70 mm ²				CRIMPFOX-C120 RC 70/F-DIE	1212334
Accessories: die pair for insulated cable lugs 					
10 mm ²		CRIMPFOX-C50 RCI 10/DIE	1212346	CRIMPFOX-C120 RCI 10/DIE	1212327
16 mm ²		CRIMPFOX-C50 RCI 16/DIE	1212347	CRIMPFOX-C120 RCI 16/DIE	1212328
25 mm ²		CRIMPFOX-C50 RCI 25/DIE	1212348	CRIMPFOX-C120 RCI 25/DIE	1212329
35 mm ²				CRIMPFOX-C120 RCI 35/DIE	1212330
Accessories: die pair for standard copper tubular cable lugs 					
35 mm ²		CRIMPFOX-C50 RCT 35-1/DIE	1212341		
16, 35 mm ²				CRIMPFOX-C120 RCT 35-1/DIE	1212320
50 mm ²		CRIMPFOX-C50 RCT 50-1/DIE	1212342		
25, 50 mm ²				CRIMPFOX-C120 RCT 50-1/DIE	1212321
10, 70 mm ²				CRIMPFOX-C120 RCT 70-1/DIE	1212319
95 mm ²				CRIMPFOX-C120 RCT 95-1/DIE	1212322
120 mm ²				CRIMPFOX-C120 RCT 120-1/DIE	1212323
Accessories: pre-round die pair for sector cables					
25, 35 mm ²		CRIMPFOX-C50 R25-35/DIE	1212349		
35, 50 mm ²		CRIMPFOX-C50 R35-50/DIE	1212350		
50, 70 mm ²		CRIMPFOX-C50 R50-70/DIE	1212351		
25, 50 mm ²				CRIMPFOX-C120 R25-50/DIE	1212324
35, 70 mm ²				CRIMPFOX-C120 R35-70/DIE	1212325
95 mm ²				CRIMPFOX-C120 R95/DIE	1212326

Ferrules



What is a ferrule?

A ferrule is a tin-plated copper tube with or without colored polypropylene insulation. It is applied to the end of a conductor where the insulation of the wire has been stripped off. Ferrules come in many sizes and styles, including insulated, un-insulated, single, twin, loose, in strips, and reeled.



Why use ferrules?

Ferrules provide many benefits, ensuring solid, air-tight connections. When wires are stripped of their insulation, the individual strands are compromised. The strands become loose or frayed and can be severed. Ferrules strengthen stranded wire bundles, eliminating stray strands and providing a durable and safe connection, ensuring

long-term electrical performance. Ferrules safeguard connections from corrosion and vibration, providing protection from high temperatures, short circuits, and, in some cases, arc flashes.

How do I apply a ferrule?

First, the conductor must be cut flush. Using a sharp, proper cutting device will prevent an uneven insulation cut. Carefully remove the insulation to prevent damage to the individual strands. Then remove only the length of insulation required, as removing too much will result in an extra step of cutting off the excess once the ferrule is applied. Removing too little will affect the air-tight corrosion resistance of the connection. The strands should completely fill the ferrule's barrel and protrude no more than .02 inches (0.5 millimeters) from the end of the barrel. Locate a suitable wire stripper that offers strip length adjustments. The strip length should, at minimum, equal the barrel length of the ferrule. Set the strip length guide accordingly and strip the insulation off the conductor. Insert the stripped conductor into the plastic collar of the ferrule and then into the proper ferrule crimping tool to fasten. The ferrule should pass a pull force test that determines the amount of force required to pull the ferrule off the wire once crimped. There are different pull force requirements depending on the American Wire Gauge of the wire.


How do I choose a high-quality ferrule?

One very important step in manufacturing a quality ferrule is called annealing. Annealing is when metal is heated and allowed to cool slowly. This process alters the physical and chemical properties to increase flexibility and toughen the metal. Ferrules that are not annealed are weaker and more likely to crack when crimped or touched. Annealing is an additional step in the production of ferrules and results in additional costs and a higher price to the end user. Many lower-cost manufacturers skip the annealing step, so their ferrules stand the chance of cracking.

How does UL Listing work for ferrules?

Ferrules are not UL Listed. The UL Listing applies to the combination of a ferrule and a crimper. UL tests a manufacturer's ferrules with the same manufacturer's crimper, and either passes or fails them. If passed, the combination is then UL Listed. Because of the testing requirements and process, mixing manufacturers is not permitted. Ferrules from Manufacturer A cannot be crimped by Manufacturer B's crimpers, regardless of whether both manufacturers carry UL. Phoenix Contact ferrules used with a Phoenix Contact crimper is UL Listed.

Uninsulated ferrules




Dimensions			Ordering data		
Barrel	Opening	End opening	Type	Order No.	Pcs/Pkg
24 AWG / 0.25 mm ² – color = silver					
5.00	1.70	0.80	A 0,25-5	3202465	1,000
7.00	1.70	0.80	A 0,25-7	3202478	1,000
22 AWG / 0.34 mm ² – color = silver					
7.00	1.80	0.90	A 0,34-7	3009202	1,000
20 AWG / 0.50 mm ² – color = silver					
6.00	2.10	1.00	A 0,5-8	3200218	1,000
8.00	2.10	1.00	A 0,5-8	3202481	1,000
10.00	2.10	1.00	A 0,5-10	3202494	1,000
18 AWG / 0.75 mm ² – color = silver					
6.00	2.30	1.20	A 0,75-6	3200221	1,000
8.00	2.30	1.20	A 0,75-8	3202504	1,000
10.00	2.30	1.20	A 0,75-10	3200234	1,000
18 AWG / 1 mm ² – color = silver					
6.00	2.50	1.40	A 1-6	3200247	1,000
8.00	2.50	1.40	A 1-8	3202517	1,000
10.00	2.50	1.40	A 1-10	3200250	1,000
16 AWG / 1.5 mm ² – color = silver					
7.00	2.80	1.70	A 1,5-7	3200263	1,000
10.00	2.80	1.70	A 1,5-10	3200276	1,000
12.00	2.80	1.70	A 1,5-12	3200588	1,000
15.00	2.80	1.70	A 1,5-15	3202591	1,000
18.00	2.80	1.70	A 1,5-18	3202601	1,000
14 AWG / 2.5 mm ² – color = silver					
7.00	3.40	2.20	A 2,5-7	3200289	1,000
10.00	3.40	2.20	A 2,5-10	2100062	1,000
12.00	3.40	2.20	A 2,5-12	3200292	1,000
18.00	3.40	2.20	A 2,5-18	3202821	1,000
12 AWG / 4 mm ² – color = silver					
9.00	4.00	2.80	A 4-9	3200302	1,000
12.00	4.00	2.80	A 4-12	3200315	1,000
15.00	4.00	2.80	A 4-15	2100050	1,000
18.00	4.00	2.80	A 4-18	3202834	1,000
10 AWG / 6 mm ² – color = silver					
10.00	4.70	3.50	A 6-10	3202520	500
12.00	4.70	3.50	A 6-12	3200328	500
15.00	4.70	3.50	A 6-15 - 1000	2100042	1,000
18.00	4.70	3.50	A 6-18 - 1000	2100044	1,000

Dimensions			Ordering data		
Barrel	Opening	End opening	Type	Order No.	Pcs/Pkg
8 AWG / 10 mm ² – color = silver					
12.00	5.80	4.50	A 10-12	3200331	500
15.00	5.80	4.50	A 10-15	2100039	500
18.00	5.80	4.50	A 10-18	3200344	500
25.00	5.80	4.50	A 10-25	1090628	500
32.00	5.80	4.50	A 10-32	1090629	500
6 AWG / 16 mm ² – color = silver					
12.00	7.50	5.80	A 16-12	3200425	100
18.00	7.50	5.80	A 16-18	2100033	250
25.00	7.50	5.80	A 16-25	1090632	250
32.00	7.50	5.80	A 16-32	1090633	250
4 AWG / 25 mm ² – color = silver					
12.00	9.50	7.30	A 25-12	3200357	100
15.00	9.50	7.30	A 25-15	3200360	100
18.00	9.50	7.30	A 25-18	3200373	100
20.00	9.50	7.30	A 25-20	3200386	100
25.00	9.50	7.30	A 25-25	1090634	100
32.00	9.50	7.30	A 25-32	1090636	100
40.00	9.50	7.30	A 25-40	3241238	100
2 AWG / 35 mm ² – color = silver					
18.00	11.00	8.30	A 35-18	3200399	100
20.00	11.00	8.30	A 35-20	3200409	100
40.00	11.00	8.20	A 35-40	3241239	100
32.00	11.00	8.20	A 35-32	1090638	100
1/0 AWG / 50 mm ² – color = silver					
18.00	13.00	10.30	A 50-18	2100025	100
25.00	13.00	10.30	A 50-25	2100024	100
32.00	13.00	10.30	A 50-32	1090639	100
40.00	13.00	10.30	A 50-40	3241240	100
2/0 AWG / 70 mm ² – color = silver					
40.00	15	12.50	A 70-40	3241241	100
3/0 AWG / 95 mm ² – color = silver					
40.00	17	14.50	A 95-40	3241242	100
4/0 AWG / 120 mm ² – color = silver					
40.00	19	17.70	A 120-40	1090640	50

- ✓ New colors
- ✓ Longer barrels
- ✓ Larger packages


Insulated ferrules 26–14 AWG



Dimensions			Ordering data			
Color	Barrel	Opening	End opening	Type	Order No.	Pcs/Pkg
26 AWG / 0.14 mm ²						
gray	6.00	2.00	0.80	AI 0,14-6 GY-1000	1034128	1,000
brown	6.00	2.00	0.80	AI 0,14-6 BN	2100148	100
gray	8.00	2.00	0.80	AI 0,14-8 GY-1000	3203011	1,000
brown	8.00	2.00	0.80	AI 0,14-8 BN	2100149	100
24 AWG / 0.25 mm ²						
yellow	6.00	2.00	0.80	AI 0,25-6 YE	3203024	100
blue	6.00	2.00	0.80	AI 0,25-6 BU	3203040	100
violet	6.00	2.00	0.80	AI 0,25-6 VT	2100146	100
yellow	8.00	2.00	0.80	AI 0,25-8 YE	3203037	100
yellow	8.00	2.00	0.08	AI 0,25-8 YE-1000	2100145	1,000
blue	8.00	2.00	0.80	AI 0,25-8 BU	3201364	100
violet	8.00	2.00	0.80	AI 0,25-8 VT	2100147	100
yellow	10.00	2.00	0.80	AI 0,25-10 YE	3241128	100
blue	12.00	2.00	0.80	AI 0,25-12 BU	3200632	100
22 AWG / 0.34 mm ²						
turquoise	6.00	2.00	0.80	AI 0,34-6 TQ	3203053	100
pink	6.00	2.00	0.80	AI 0,34-6 PK	2100138	100
turquoise	8.00	2.00	0.80	AI 0,34-8 TQ	3203066	100
turquoise	8.00	2.00	0.80	AI 0,34-8 TQ-25000	2100141	25,000
pink	8.00	2.00	0.80	AI 0,34-8 PK	2100139	100
turquoise	10.00	2.00	0.80	AI 0,34-10 TQ	3241129	100
turquoise	10.00	2.00	0.80	AI 0,34-10 TQ-25000	2100142	25,000
turquoise	12.00	2.00	0.80	AI 0,34-12 TQ	3200645	100
20 AWG / 0.5 mm ²						
white	6.00	2.50	1.10	AI 0,5-6 WH	3200687	100
orange	6.00	2.50	1.10	AI 0,5-6 OG	3201301	100
white	8.00	2.50	1.10	AI 0,5-8 WH	3200014	100
white	8.00	2.50	1.10	AI 0,5-8 WH-1000	3200881	1,000
white	8.00	2.50	1.10	AI 0,5-8 WH-25000	2100133	25,000
orange	8.00	2.50	1.10	AI 0,5-8 OG	3201123	100
orange	8.00	2.50	1.10	AI 0,5-8 OG-1000	3202902	1,000
white	10.00	2.50	1.10	AI 0,5-10 WH	3201275	100
white	10.00	2.50	1.10	AI 0,5-10 WH-25000	2100136	25,000
orange	10.00	2.50	1.10	AI 0,5-10 OG	3241126	100
white	12.00	2.50	1.10	AI 0,5-12 WH	3200506	100
18 AWG / 0.75 mm ²						
white	6.00	2.80	1.30	AI 0,75-6 WH	3201314	100
gray	6.00	2.80	1.30	AI 0,75-6 GY	3200690	100
gray	6.00	2.80	1.30	AI 0,75-6 GY-25000	2100120	25,000
blue	6.00	2.80	1.30	AI 0,75-6 BU	2100106	100
white	8.00	2.80	1.30	AI 0,75-8 WH	3201110	100
white	8.00	2.80	1.30	AI 0,75-8 WH-1000	2100118	1,000
blue	8.00	2.80	1.30	AI 0,75-8 BU	3200027	100
blue	8.00	2.80	1.30	AI 0,75-8 BU-1000	1213200	1,000
gray	8.00	2.80	1.30	AI 0,75-8 GY	3200519	100
gray	8.00	2.80	1.30	AI 0,75-8 GY-1000	3200894	1,000
gray	8.00	2.80	1.30	AI 0,75-8 GY-25000	2100121	25,000
gray	10.00	2.80	1.30	AI 0,75-10 GY	3201288	100
gray	10.00	2.80	1.30	AI 0,75-10 GY-1000	3203118	1,000
gray	10.00	2.80	1.30	AI 0,75-10 GY-25000	2100122	25,000
blue	10.00	2.80	1.30	AI 0,75-10 BU	2100109	100
white	10.00	2.80	1.30	AI 0,75-10 WH	2100114	100
gray	12.00	2.80	1.30	AI 0,75-12 GY	3200849	100
blue	12.00	2.80	1.30	AI 0,75-12 BU	2100105	100
white	12.00	2.80	1.30	AI 0,75-12 WH	2100110	100

Dimensions			Ordering data			
Color	Barrel	Opening	End opening	Type	Order No.	Pcs/Pkg
18 AWG / 1 mm ²						
yellow	6.00	3.00	1.50	AI 1-6 YE	3201327	100
red	6.00	3.00	1.50	AI 1-6 RD	3200742	100
yellow	8.00	3.00	1.50	AI 1-8 YE	3201097	100
red	8.00	3.00	1.50	AI 1-8 RD	3200030	100
red	8.00	3.00	1.50	AI 1-8 RD-1000	3200904	1,000
red	8.00	3.00	1.50	AI 1-8 RD-25000	2100096	25,000
red	10.00	3.00	1.50	AI 1-10 RD	3200182	100
red	10.00	3.00	1.50	AI 1-10 RD-1000	3203121	1,000
red	10.00	3.00	1.50	AI 1-10 RD-25000	2100098	25,000
yellow	10.00	3.00	1.50	AI 1-10 YE	2100089	100
red	12.00	3.00	1.50	AI 1-12 RD	3200674	100
red	12.00	3.00	1.50	AI 1-12 RD-1000	1200311	1,000
yellow	12.00	3.00	1.50	AI 1-12 YE	2100086	100
16 AWG / 1.5 mm ²						
black	6.00	3.40	1.80	AI 1,5-6 BK	3200755	100
black	8.00	3.40	1.80	AI 1,5-8 BK	3200043	100
black	8.00	3.40	1.80	AI 1,5-8 BK-1000	3200917	1,000
black	8.00	3.40	1.80	AI 1,5-8 BK-20000	2100078	20,000
red	8.00	3.40	1.80	AI 1,5-8 RD	3201136	100
red	8.00	3.40	1.80	AI 1,5-8 RD-1000	3202928	1,000
black	10.00	3.40	1.80	AI 1,5-10 BK	3200195	100
black	10.00	3.40	1.80	AI 1,5-10 BK-1000	3203134	1,000
black	10.00	3.40	1.80	AI 1,5-10 BK-20000	2100080	20,000
red	10.00	3.40	1.80	AI 1,5-10 RD	2100071	100
black	12.00	3.40	1.80	AI 1,5-12 BK	3201482	100
black	12.00	3.40	1.80	AI 1,5-12 BK-1000	1200310	1,000
red	12.00	3.40	1.80	AI 1,5-12 RD	2100070	100
black	18.00	3.40	1.80	AI 1,5-18 BK	3200056	100
red	18.00	3.40	1.80	AI 1,5-18 RD	3241125	500
14 AWG / 2.5 mm ²						
gray	8.00	4.20	2.30	AI 2,5-8 GY	3200069	100
gray	8.00	4.20	2.30	AI 2,5-8 GY-1000	1213201	1,000
blue	8.00	4.20	2.30	AI 2,5-8 BU	3200522	100
blue	8.00	4.20	2.30	AI 2,5-8 BU-1000	3200920	1,000
blue	8.00	4.20	2.30	AI 2,5-8 BU-15000	2100063	15,000
blue	10.00	4.20	2.30	AI 2,5-10 BU	3202533	100
blue	10.00	4.20	2.30	AI 2,5-10 BU-1000	3203147	1,000
gray	12.00	4.20	2.30	AI 2,5-12 GY	3200205	100
blue	12.00	4.20	2.30	AI 2,5-12 BU	3200962	100
blue	12.00	4.20	2.30	AI 2,5-12 BU-1000	1200309	1,000
blue	12.00	4.20	2.30	AI 2,5-12 BU-10000	2100064	10,000
gray	18.00	4.20	2.30	AI 2,5-18 GY	3200072	100
blue	18.00	4.20	2.30	AI 2,5-18 BU	3200580	100

Insulated ferrules 12-4/0 AWG



Dimensions				Ordering data		
Color	Barrel	Opening	End opening	Type	Order No.	Pcs/Pkg
12 AWG / 4 mm²						
gray	10.00	4.80	2.80	AI 4-10 GY	3200535	100
gray	10.00	4.80	2.80	AI 4-10 GY-1000	1200308	1,000
gray	10.00	4.80	2.80	AI 4-10 GY-5000	2100055	5,000
orange	10.00	4.80	2.80	AI 4-10 OG	3200085	100
orange	10.00	4.80	2.80	AI 4-10 OG-1000	1213202	1,000
orange	10.00	4.80	2.80	AI 4-10 OG-1001	2100054	5,000
gray	12.00	4.80	2.80	AI 4-12 GY	3200959	100
gray	12.00	4.80	2.80	AI 4-12 GY-1000	1200307	1,000
gray	12.00	4.80	2.80	AI 4-12 GY-5000	2100053	5,000
orange	12.00	4.80	2.80	AI 4-12 OG	3200438	100
gray	15.00	4.80	2.80	AI 4-15 GY	1200264	100
gray	18.00	4.80	2.80	AI 4-18 GY	3200593	100
orange	18.00	4.80	2.80	AI 4-18 OG	3200098	100
10 AWG / 6 mm²						
yellow	12.00	6.20	3.50	AI 6-12 YE	3200548	100
yellow	12.00	6.20	3.50	AI 6-12 YE-1000	2100047	1,000
black	12.00	6.20	3.50	AI 6-12 BK	3201107	100
black	12.00	6.20	3.50	AI 6-12 BK-1000	1004301	1,000
green	12.00	6.20	3.50	AI 6-12 GN	3200108	100
green	12.00	6.20	3.50	AI 6-12 GN-1000	1213203	1,000
green	18.00	6.20	3.50	AI 6-18 GN	3200111	100
yellow	18.00	6.20	3.50	AI 6-18 YE	3200603	100
yellow	18.00	6.20	3.50	AI 6-18 YE-2500	2100048	2,500
black	18.00	6.20	3.50	AI 6-18 BK	2100043	100
8 AWG / 10 mm²						
red	12.00	7.50	4.60	AI 10-12 RD	3200551	100
red	12.00	7.50	4.60	AI 10-12 RD-2500	2100041	2,500
ivory	12.00	7.50	4.60	AI 10-12 IV	3201068	100
brown	12.00	7.50	4.60	AI 10-12 BR	3200124	100
red	18.00	7.50	4.60	AI 10-18 RD	3200616	100
red	18.00	7.50	4.60	AI 10-18 RD-1500	2100037	1,500
brown	18.00	7.50	4.60	AI 10-18 BR	3200137	100
ivory	18.00	7.50	4.60	AI 10-18 IV	2100038	100
6 AWG / 16 mm²						
blue	12.00	8.80	5.80	AI 16-12 BU	3200564	100
blue	12.00	8.80	5.80	AI 16-12 BU-1500	2100036	1,500
green	12.00	8.80	5.80	AI 16-12 GN	3201152	100
white	12.00	8.80	5.80	AI 16-12 WH	3200140	100
ivory	12.00	8.80	5.80	AI 16-12 IV	3201181	100
blue	18.00	8.80	5.80	AI 16-18 BU	3200629	100
blue	18.00	8.80	5.80	AI 16-18 BU-1000	2100035	1,000
green	18.00	8.80	5.80	AI 16-18 GN	3201330	100
white	18.00	8.80	5.80	AI 16-18 WH	3200153	100

Dimensions				Ordering data		
Color	Barrel	Opening	End opening	Type	Order No.	Pcs/Pkg
4 AWG / 25 mm²						
yellow	16.00	11.00	7.30	AI 25-16 YE	3200577	50
black	16.00	11.00	7.30	AI 25-16 BK	3200412	50
brown	16.00	11.00	7.30	AI 25-16 BN	3201084	50
yellow	18.00	11.00	7.30	AI 25-18 YE	3201505	50
black	18.00	11.00	7.30	AI 25-18 BK	2100032	50
brown	18.00	11.00	7.30	AI 25-18 BN	2100030	50
yellow	22.00	11.00	7.30	AI 25-22 YE	3200700	50
black	22.00	11.00	7.30	AI 25-22 BK	3200739	50
black	22.00	11.00	7.30	AI 25-22 BK	2100031	50
2 AWG / 35 mm²						
red	16.00	12.50	8.30	AI 35-16 RD	3200441	50
beige	16.00	12.50	8.30	AI 35-16 BE	3201071	50
red	18.00	12.50	8.30	AI 35-18 RD	3201495	50
beige	18.00	12.50	8.30	AI 35-18 BE	2100028	50
red	25.00	12.50	8.30	AI 35-25 RD	3200713	50
beige	25.00	12.50	8.30	AI 35-25 BE	2100027	50
1/0 AWG / 50 mm²						
blue	20.00	15.00	10.30	AI 50-20 BU	3200454	50
olive	20.00	15.00	10.30	AI 50-20 OL	3201178	50
blue	25.00	15.00	10.30	AI 50-25 BU	3200726	25
black	25.00	15.00	10.30	AI 50-25 BK	3240678	1,000
olive	25.00	15.00	10.30	AI 50-25 OL	2100023	25
2/0 AWG / 70 mm²						
yellow	20.00	16.00	12.70	AI 70-20 YE	3201848	25
3/0 AWG / 95 mm²						
red	25.00	18.00	14.70	AI 95-25 RD	3201853	25
4/0 AWG / 120 mm²						
blue	27.00	21.00	16.70	AI 120-27 BU	3201822	25


- ✓ New colors
- ✓ Longer barrels
- ✓ Larger packages

GB ferrules (larger insulated collar opening)




Dimensions				Ordering data		
Color	Barrel	Opening	End opening	Type	Order No.	Pcs/Pkg
20 AWG / 0.5 mm²						
white	8.00	3.00	1.10	AI 0,5-8 WH-GB	1208966	500
white	8.00	3.00	1.10	AI-GB 0,5-8 WH	2100131	1,000
white	8.00	3.00	1.10	AI-GB 0,5-8 WH-25000	2100134	25,000
orange	8.00	3.00	1.10	AI-GB 0,5-8 OG	2100128	100
white	10.00	3.00	1.10	AI 0,5-10 WH-GB	3203150	100
white	10.00	3.00	1.10	AI-GB 0,5-10 WH	2100132	100
white	10.00	3.00	1.10	AI-GB 0,5-10 WH-25000	2100135	25,000
orange	10.00	3.00	1.10	AI-GB 0,5-10 OG	2100130	100
18 AWG / 0.75 mm²						
white	8.00	3.40	1.30	AI-GB 0,75-8 WH	2100111	100
gray	8.00	3.40	1.30	AI 0,75-8 GY-GB	1208979	500
gray	8.00	3.40	1.30	AI-GB 0,75-8 GY	2100116	100
gray	8.00	3.40	1.30	AI-GB 0,75-8 GY-25000	2100123	25,000
blue	10.00	3.40	1.30	AI-GB 0,75-10 BU	2100107	100
gray	10.00	3.40	1.30	AI 0,75-10 GY-GB	3203163	100
gray	10.00	3.40	1.30	AI-GB 0,75-10 GY	2100117	100
gray	10.00	3.40	1.30	AI 0,75-10 GY-GB-1000	3203299	1,000
gray	10.00	3.40	1.30	AI-GB 0,75-10 GY-1000	2100119	1,000
gray	10.00	3.40	1.30	AI-GB 0,75-10 GY-25000	2100124	25,000
white	10.00	3.40	1.30	AI-GB 0,75-10 WH	2100113	100
blue	12.00	3.40	1.30	AI-GB 0,75-12 BU	2100108	100
gray	12.00	3.40	1.30	AI-GB 0,75-12 GY	2100104	100
white	12.00	3.40	1.30	AI-GB 0,75-12 WH	2100112	100
18 AWG / 1 mm²						
yellow	8.00	3.40	1.50	AI-GB 1-8 YE	2100085	100
red	8.00	3.40	1.50	AI 1-8 RD-GB	1208982	500
red	8.00	3.40	1.50	AI-GB 1-8 RD	2100091	100
red	8.00	3.40	1.50	AI-GB 1-8 RD-20000	2100095	20,000
red	10.00	3.40	1.50	AI 1-10 RD-GB-1000	1208869	1,000
red	10.00	3.40	1.50	AI-GB 1-10 RD-1000	2100092	1,000
red	10.00	3.40	1.50	AI-GB 1-10 RD-20000	2100097	20,000
yellow	10.00	3.40	1.50	AI-GB 1-10 YE	2100088	100
red	12.00	3.40	1.50	AI-GB 1-12 RD	2100090	100
yellow	12.00	3.40	1.50	AI-GB 1-12 YE	2100087	100
16 AWG / 1.5 mm²						
black	8.00	3.70	1.80	AI 1,5-8 BK-GB-1000	3202892	1,000
black	8.00	3.70	1.80	AI-GB 1,5-8 BK-1000	2100074	1,000
black	8.00	3.70	1.80	AI-GB 1,5-8 BK-15000	2100077	15,000
red	8.00	3.70	1.80	AI-GB 1,5-8 RD	2100069	100
black	10.00	3.70	1.80	AI 1,5-10 BK-GB-1000	1208872	1,000
black	10.00	3.70	1.80	AI 1,5-10 BK-GB-15000	2100079	15,000
black	10.00	3.70	1.80	AI-GB 1,5-10 BK-1000	2100076	1,000
14 AWG / 2.5 mm²						
blue	8.00	7.9	2.3	AI-GB 2,5-8 BU	2100237	100
gray	8.00	7.9	2.3	AI-GB 2,5-8 GY	2100239	100
blue	12.00	7.9	2.3	AI-GB 2,5-12 BU	2100241	100
gray	12.00	7.9	2.3	AI-GB 2,5-12 GY	2100242	100
12 AWG / 4 mm²						
gray	10.00	7.9	2.9	AI-GB 4-10 GY	2100245	100
gray	12.00	7.9	2.9	AI-GB 4-12 GY	2100247	100
10 AWG / 6 mm²						
yellow	12.00	8.7	3.6	AI-GB 6-12 YE	2100249	100

XL ferrules (extra-large insulated collar opening)




Cross-section		Dimensions			Ordering data		
mm ²	AWG	Color	Barrel	Opening	End opening	Description	Pcs/Pkg
1.5	16	black	8.00	7.00	1.80	AI-XL 1,5-8 BK	3201916 100
1.5	16	black	10.00	7.00	1.80	AI-XL 1,5-10 BK	3201974 100
2.5	14	blue	8.00	7.90	2.30	AI-XL 2,5-8 BU	3201929 100
2.5	14	blue	12.00	7.90	2.30	AI-XL 2,5-12 BU	3201987 100
4	12	gray	10.00	7.90	2.90	AI-XL 4-10 GY	3201932 100
6	10	yellow	12.00	8.70	3.60	AI-XL 6-12 YE	3201945 100
10	8	red	12.00	10.20	4.60	AI-XL 10-12 RD	3201958 100
16	6	blue	12.00	12.50	6.00	AI-XL 16-12 BU	3201961 100

TWIN ferrules





Dimensions				Ordering data		
Color	Barrel	Opening	End opening	Type	Order No.	Pcs/Pkg
2 x 20 AWG / 2 x 0.5 mm²						
white	8.00	2.50	1.50	AI-TWIN 2X0,5-8 WH	3200933	100
orange	8.00	2.50	1.50	AI-TWIN 2X0,5-8 OG	2100015	100
white	10.00	2.50	1.50	AI-TWIN 2X0,5-10 WH	3203309	100
2 x 18 AWG / 2 x 0.75 mm²						
gray	8.00	2.80	1.80	AI-TWIN 2X0,75-8 GY	3200807	100
blue	8.00	2.80	1.80	AI-TWIN 2X0,75-8 BU	3240668	100
white	8.00	2.80	1.80	AI-TWIN 2X0,75-8 WH	2100011	100
gray	10.00	2.80	1.80	AI-TWIN 2X0,75-10 GY	3200975	100
blue	10.00	2.80	1.80	AI-TWIN 2X0,75-10 BU	2100009	100
white	10.00	2.80	1.80	AI-TWIN 2X0,75-10 WH	2100010	100
2 x 18 AWG / 2 x 1 mm²						
red	8.00	3.40	2.05	AI-TWIN 2X1-8 RD	3200810	100
yellow	8.00	3.40	2.05	AI-TWIN 2X1-8 YE	2100008	100
red	10.00	3.40	2.05	AI-TWIN 2X1-10 RD	3200988	100
red	12.00	3.40	2.05	AI-TWIN 2X1-12 RD	3240679	100
yellow	12.00	3.40	2.05	AI-TWIN 2X1-12 YE	2100007	100
2 x 16 AWG / 2 x 1.5 mm²						
black	8.00	3.60	2.30	AI-TWIN 2X1,5-8 BK	3200823	100
red	8.00	3.60	2.30	AI-TWIN 2X1,5-8 RD	2100006	100
black	10.00	3.60	2.30	AI-TWIN 2X1,5-10 BK	3201534	100
black	12.00	3.60	2.30	AI-TWIN 2X1,5-12 BK	3200991	100
red	12.00	3.60	2.30	AI-TWIN 2X1,5-12 RD	2100005	100
2 x 14 AWG / 2 x 2.5 mm²						
blue	10.00	4.20	2.90	AI-TWIN 2X2,5-10 BU	3200836	100
gray	10.00	4.20	2.90	AI-TWIN 2X2,5-10 GY	3240669	100
blue	13.00	4.20	2.90	AI-TWIN 2X2,5-13 BU	3200878	100
blue	16.00	4.20	2.90	AI-TWIN 2X2,5-16 BU	1200281	100
2 x 12 AWG / 2 x 4 mm²						
gray	12.00	4.90	3.80	AI-TWIN 2X4-12 GY	3201000	100
orange	12.00	4.90	3.80	AI-TWIN 2X4-12 OG	1213204	100
2 x 10 AWG / 2 x 6 mm²						
yellow	14.00	5.90	4.90	AI-TWIN 2X6-14 YE	3201013	100
green	14.00	5.90	4.90	AI-TWIN 2X6-14 GN	1213205	100
2 x 8 AWG / 2 x 10 mm²						
red	14.00	7.20	6.50	AI-TWIN 2X10-14 RD	3201026	100
brown	14.00	7.20	6.50	AI-TWIN 2X10-14 BN	1213206	100
2 x 6 AWG / 2 x 16 mm²						
blue	16.00	8.80	8.50	AI-TWIN 2X16-16 BU	3202847	50
white	16.00	8.80	8.50	AI-TWIN 2X16-16 WH	1213207	50

Reeled ferrules for the CF 3000




Dimensions			Ordering data			
Color	Barrel	Opening	End opening	Type	Order No.	Pcs/Pkg
24 AWG / 0.34 mm²						
turquoise	8.00	2.00	0.80	AI 0,34-8 TQ-B	3240249	1,000
22 AWG / 0.25 mm²						
yellow	8.00	2.00	0.80	AI 0,25-8 YE-B	3240251	1,000
blue	8.00	2.00	0.80	AI 0,25-8 BU-B	3240250	1,000
20 AWG / 0.5 mm²						
white	8.00	2.50	1.10	AI 0,5-8 WH-B 3000	3240663	3,000
orange	8.00	2.50	1.10	AI 0,5-8 OG-B	3201563	1,000
18 AWG / 0.75 mm²						
white	8.00	2.80	1.30	AI 0,75-8 WH-B	3201576	1,000
white	8.00	2.80	1.30	AI 0,75-8 WH-B 3000	3240677	3,000
gray	8.00	2.80	1.30	AI 0,75-8 GY-B 3000	3240664	3,000
blue	8.00	2.80	1.30	AI 0,75-8 BU-B	3201547	1,000
18 AWG / 1 mm²						
yellow	8.00	3.00	1.50	AI 1-8 YE-B	3201589	1,000
red	8.00	3.00	1.50	AI 1-8 RD-B 3000	3240665	3,000
16 AWG / 1.5 mm²						
red	8.00	3.40	1.80	AI 1,5-8 RD-B	3201592	1,000
black	8.00	3.40	1.80	AI 1,5-8 BK-B 2500	3240666	2,500
14 AWG / 2.5 mm²						
gray	8.00	4.20	2.30	AI 2,5-8 GY-B	3201550	1,000
blue	8.00	4.20	2.30	AI 2,5-8 BU-B 1500	3240667	1,500

Strips of ferrules for the Crimpfox 4in1



Dimensions			Ordering data			
Color	Barrel	Opening	End opening	Type	Order No.	Pcs/Pkg
20 AWG / 0.5 mm²						
white	8.00	2.50	1.10	AI 0,5-8 WH S1	1200104	500
18 AWG / 0.75 mm²						
blue	8.00	2.80	1.30	AI 0,75-8 BU S1	1200163	500
gray	8.00	2.80	1.30	AI 0,75-8 GY S1	1200105	500
18 AWG / 1 mm²						
red	8.00	3.00	1.50	AI 1-8 RD S1	1200106	500
16 AWG / 1.5 mm²						
black	8.00	3.40	1.80	AI 1,5-8 BK S1	1200107	500
14 AWG / 2.5 mm²						
blue	8.00	4.20	2.30	AI 2,5-8 BU S1	1200108	400
gray	8.00	4.20	2.30	AI 2,5-8 GY S1	1200164	400

Wire marker ferrules



Cross-section			Dimensions			Ordering data			
mm ²	AWG	Color	Barrel	Opening	End opening	Description	Order No.	Pcs/Pkg	
0.5	20	white	8.00	2.90	1.40	AI-WM 0,5-8 WH	3240542	100	
0.75	18	gray	8.00	2.90	1.60	AI-WH 0,75-8 GY	3240543	100	
1	18	red	8.00	3.00	1.80	AI-WM 1-8 RD	3240544	100	
1.5	16	white	8.00	3.40	2.10	AI-WM 1,5-8 WH	3240545	100	
2.5	14	blue	8.00	4.20	2.60	AI-WM 2,5-8 BU	3240572	100	


Conductor pull-out test

Crimping points can be affected by tensile forces during wiring or operation. Therefore, properly crimped connectors and ferrules must offer a high degree of mechanical safety. To test the tensile load capacity, a crimped conductor is exposed to a predefined, cross-sectional tensile force for a period of 60 seconds, and it must withstand this load. The tensile force exerts stress on the conductor at the crimping point. Damages to the crimp point must not be a result of this. Generally, even the maximum tensile force is tolerated until the connection is destroyed.

In practice, crimping points can be affected by tensile forces during wiring or operation.

Therefore, properly crimped contacts must offer a high degree of mechanical safety. To test the tensile load capacity, the crimping must withstand a predefined tensile force based on the cross-section for 60 seconds. The tensile force exerts stress on the conductor at the crimping point. The crimping must withstand the force without any damage.

The test results for Phoenix Contact contacts are significantly higher than the minimum values required by the standard.

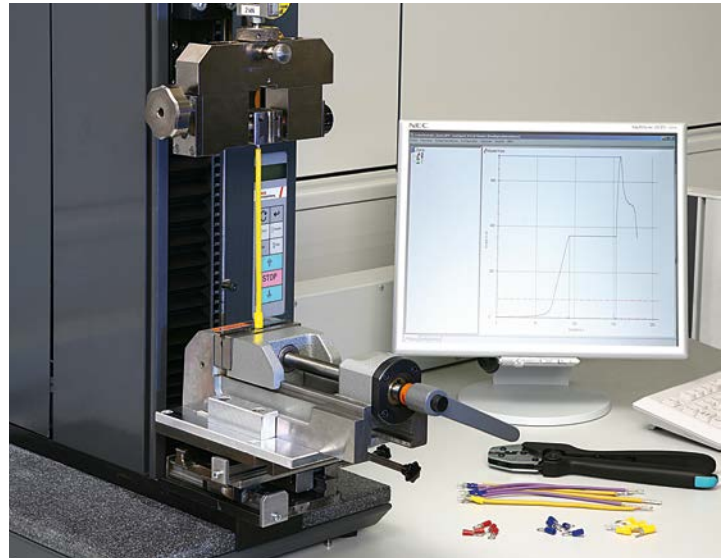

Conductor pull-out test

Metric	JIS type	AWG/MCM equivalent	UL 486F-A-F	IEC 60999-1/2 EN 60947-1 DIN 46228-1/4	IEC 60352-2	UL486A/B (CU)	JIS C 2805	DIN EN 61238-1 (CU)	DIN EN 61210
0.2 mm ²	-	24	0.21 mm ²	20 N	10 N	22.3 N			28 N
0.25 mm ²				20 N		32 N			
0.34 mm ²	-	22	0.33 mm ²	20 N	15 N	40 N			40 N
0.5 mm ²	-	20	0.52 mm ²	20 N	20 N	60 N			56 N
0.75 mm ²	-			30 N	30 N	85 N			84 N
		18	0.82 mm ²	30 N	30 N	90 N			
1 mm ²	-			35 N	35 N	108 N			108 N
-	1.25 mm ²						100 N (200 N)		
		16	1.31 mm ²	40 N	40 N	135 N			
1.5 mm ²				40 N	40 N	150 N			150 N
-	2.0 mm ²						100 N (290 N)		
		14	2.08 mm ²	50 N	50 N	200 N			
2.5 mm ²				50 N	50 N	230 N			230 N
-		12	3.31 mm ²	60 N	60 N	275 N			
	3.5 mm ²						540 N		
4 mm ²				60 N	60 N	310 N			310 N
-	5.5 mm ²						780 N		
6 mm ²		10	5.26 mm ²	80 N	80 N	360 N			360 N
-	8 mm ²						980 N		
		8	8.37 mm ²			370 N			
10 mm ²				90 N	90 N	380 N			
-	14 mm ²						1400 N	600 N	
16 mm ²		6	13.23 mm ²	100 N	100 N			960 N	
-	22 mm ²						1800 N		
25 mm ²		4	21.15 mm ²	135 N	135 N	623 N		1500 N	
		3	26.67 mm ²			712 N			
35 mm ²		2	33.62 mm ²	190 N	190 N	801 N		2100 N	
	38 mm ²						2500 N		
		1	42.41 mm ²			890 N			
50 mm ²		1/0	53.48 mm ²		236 N	1113 N		3000 N	
	60 mm ²						3200 N		
70 mm ²		2/0	67.43 mm ²		285 N	1235 N		4200 N	
95 mm ²		3/0	85.01 mm ²		351 N	1558 N		5700 N	
	100 mm ²						3900 N		
120 mm ²		4/0	107.22 mm ²		427 N	2003 N		7200 N	
		250 MCM	127 mm ²			2225 N			
150 mm ²	150 mm ²	300 MCM	152 mm ²		427 N	2448 N	4100 N	9000 N	
185 mm ²		350 MCM	177 mm ²		503 N	2670 N		11100 N	
	200 mm ²						4400 N		
		400 MCM	203 mm ²			2893 N			
240 mm ²		500 MCM	253 mm ²		578 N	3560 N		14400 N	
	250 mm ²						4600 N		
300 mm ²		600 MCM	304 mm ²		578 N	4005 N		18000 N	
	325 mm ²						4800 N		

Cross-section related pull-out values

CRIMPFOX – corresponding connectors for the CRIMPFOX series

Slip-on sleeves and blade connectors, uninsulated				Ring cable lugs, insulated			
The uninsulated slip-on sleeves and slip-on blade connectors are made from electrolytically tin-plated brass. They supplement the product range in terms of connectors.				The insulated ring cable lugs are hard-soldered and feature the “EASY ENTRY” system. The sleeves are conically tapered to facilitate easy and correct insertion of the conductor.			
							
Description Slip-on sleeve , uninsulated, according to DIN 46247 Material / coating: brass / tin-plated Temperature range: ... 110°C				Description Insulated according to UL Material / coating: copper / tin-plated Temperature range: -20 ... 105°C			
Dimensions	Ordering data			Dimensions	Ordering data		
Width	Description	Order No.	Pcs/Pkg	Hole	Description	Order No.	Pcs/Pkg
20 - 18 AWG / 0.5 - 1 mm ² - color = silver				20 - 16 AWG / 0.5 - 1.5 mm ² - color = red			
8.00	AI 0,25-8 YE-B	3240251	1000	3.20	C-RCI 1,5/M3 DIN	3240016	100
8.00	AI 0,25-8 BU-B	3240250	1000	3.70	C-RCI 1,5/M3,5 DIN	3240017	100
20 - 16 AWG / 0.5 - 1.5 mm ² - color = silver				4.30	C-RCI 1,5/M4DIN	3240018	100
4.80	C-SCF 1,5/4,8X0,5	3240154	100	5.30	C-RCI 1,5/M5DIN	3240019	100
4.80	C-SCF 1,5/4,8X0,8	3240155	100	6.50	C-RCI 1,5/M6DIN	3240020	100
6.30	C-SCF 1,5/6,3X0,8	3240156	100	16 - 14 AWG / 1.5 - 2.5 mm ² - color = blue			
16 - 14 AWG / 1.5 - 2.5 mm ² - color = silver				3.20	C-RCI 2,5/M3 DIN	3240021	100
4.80	C-SCF 2,5/4,8X0,5	3240157	100	3.70	C-RCI 2,5/M3,5 DIN	3240022	100
4.80	C-SCF 2,5/4,8X0,8	3240158	100	4.30	C-RCI 2,5/M4 DIN	3240023	100
6.30	C-SCF 2,5/6,3X0,8	3240159	100	5.30	C-RCI 2,5/M5 DIN	3240024	100
12 - 10 AWG / 4 - 6 mm ² - color = silver				6.50	C-RCI 2,5/M6 DIN	3240025	50
6.30	C-SCF 6/6,3X0,8	3240160	100	8.50	C-RCI 2,5/M8 DIN	3240026	50
Slip-on blade connector , uninsulated according to DIN 46248				12 - 10 AWG / 4 - 6 mm ² - color = yellow			
20 - 16 AWG / 0.5 - 1.5 mm ² - color = silver				4.30	C-RCI 6/M4 DIN	3240027	50
6.30	C-SCM 1,5/6,3X0,8	3240161	100	5.30	C-RCI 6/M5 DIN	3240028	50
16 - 14 AWG / 1.5 - 2.5 mm ² - color = silver				6.50	C-RCI 6/M6 DIN	3240029	25
6.30	C-SCM 2,5/6,3X0,8	3240162	100	8.50	C-RCI 6/M8 DIN	3240030	25
				10.50	C-RCI 6/M10 DIN	3240031	25
				- 8 AWG / - 10 mm ² - color = red			
				5.30	C-RCI 10/M5 DIN	3240219	50
				6.50	C-RCI 10/M6 DIN	3240220	50
				8.40	C-RCI 10/M8DIN	3240221	50
				10.50	C-RCI 10/M10 DIN	3240222	50
				Special ring cable lugs, insulated			
							
				Description With additional crimp zone for conductor insulation Material / coating: copper / tin-plated Temperature range: -20 ... 105°C			
Dimensions	Ordering data			Dimensions	Ordering data		
Hole	Description	Order No.	Pcs/Pkg	Hole	Description	Order No.	Pcs/Pkg
20 - 16 AWG / 0.5 - 1.5 mm ² - color = red				20 - 16 AWG / 0.5 - 1.5 mm ² - color = red			
3.20	C-RCEI 1,5/M3 DIN	3241201	100	3.20	C-RCEI 1,5/M3 DIN	3241201	100
3.70	C-RCEI 1,5/M3,5 DIN	3241202	100	3.70	C-RCEI 1,5/M3,5 DIN	3241202	100
4.30	C-RCEI 1,5/M4DIN	3241203	100	4.30	C-RCEI 1,5/M4DIN	3241203	100
5.30	C-RCEI 1,5/M5DIN	3241204	100	5.30	C-RCEI 1,5/M5DIN	3241204	100
6.50	C-RCEI 1,5/M6DIN	3241205	100	6.50	C-RCEI 1,5/M6DIN	3241205	100
16 - 14 AWG / 1.5 - 2.5 mm ² - color = blue				16 - 14 AWG / 1.5 - 2.5 mm ² - color = blue			
3.70	C-RCEI 2,5/M3,5 DIN	3241206	100	3.70	C-RCEI 2,5/M3,5 DIN	3241206	100
4.30	C-RCEI 2,5/M4 DIN	3241207	100	4.30	C-RCEI 2,5/M4 DIN	3241207	100
5.30	C-RCEI 2,5/M5 DIN	3241208	100	5.30	C-RCEI 2,5/M5 DIN	3241208	100
6.50	C-RCEI 2,5/M6 DIN	3241209	100	6.50	C-RCEI 2,5/M6 DIN	3241209	100
8.50	C-RCEI 2,5/M8 DIN	3241210	100	8.50	C-RCEI 2,5/M8 DIN	3241210	100
12 - 10 AWG / 4 - 6 mm ² - color = yellow				12 - 10 AWG / 4 - 6 mm ² - color = yellow			
5.30	C-RCEI 6/M5 DIN	3241211	100	5.30	C-RCEI 6/M5 DIN	3241211	100
6.50	C-RCEI 6/M6 DIN	3241212	100	6.50	C-RCEI 6/M6 DIN	3241212	100
8.50	C-RCEI 6/M8 DIN	3241213	100	8.50	C-RCEI 6/M8 DIN	3241213	100
10.50	C-RCEI 6/M10 DIN	3241214	100	10.50	C-RCEI 6/M10 DIN	3241214	100

CRIMPFOX – corresponding connectors for the CRIMPFOX series

Ring cable lugs, uninsulated

The ring cable lugs without plastic sleeves are made from high-quality tin-plated electrolytic copper for maximum protection against corrosion. The hard-soldered crimp zone enables maximum conductor pull-out values to be achieved.

Description

Uninsulated according to DIN 46234
Material / coating: copper / tin-plated
Temperature range: ... 110°C



Dimensions	Ordering data		
Hole	Description	Order No.	Pcs/Pkg
20 - 18 AWG / 0.5 - 1 mm² - color = silver			
2.80	C-RC 1/M2,5 DIN	3240069	100
3.20	C-RC 1/M3 DIN	3240070	100
3.70	C-RC 1/M3,5 DIN	3240071	100
4.30	C-RC 1/M4 DIN	3240072	100
5.30	C-RC 1/M5 DIN	3240073	100
6.50	C-RC 1/M6 DIN	3240074	100
8.40	C-RC 1/M8 DIN	3240075	100
18 - 14 AWG / 1 - 2.5 mm² - color = silver			
3.20	C-RC 2,5/M3 DIN	3240076	100
3.70	C-RC 2,5/M3,5 DIN	3240077	100
4.30	C-RC 2,5/M4 DIN	3240078	100
5.30	C-RC 2,5/M5 DIN	3240079	100
6.50	C-RC 2,5/M6 DIN	3240080	100
8.40	C-RC 2,5/M8 DIN	3240081	100
10.50	C-RC 2,5/M10 DIN	3240082	100
14 - 10 AWG / 2.5 - 6 mm² - color = silver			
4.30	C-RC 6/M4 DIN	3240083	50
5.30	C-RC 6/M5 DIN	3240084	50
6.50	C-RC 6/M6 DIN	3240085	50
8.40	C-RC 6/M8 DIN	3240086	50
10.50	C-RC 6/M10 DIN	3240087	50
13.00	C-RC 6/M12 DIN	3240088	50
- 8 AWG / - 10 mm² - color = silver			
5.30	C-RC 10/M5 DIN	3240089	100
6.50	C-RC 10/M6 DIN	3240090	100
8.40	C-RC 10/M8 DIN	3240091	100
10.50	C-RC 10/M10 DIN	3240092	100
13.00	C-RC 10/M12 DIN	3240093	100
- 6 AWG / - 16 mm² - color = silver			
5.30	C-RC 16/M5 DIN	3240094	100
6.50	C-RC 16/M6 DIN	3240095	100
8.40	C-RC 16/M8 DIN	3240096	100
10.50	C-RC 16/M10 DIN	3240097	100
13.00	C-RC 16/M12 DIN	3240098	100
- 4 AWG / - 25 mm² - color = silver			
5.30	C-RC 25/M5 DIN	3240099	100
6.50	C-RC 25/M6 DIN	3240100	100
8.40	C-RC 25/M8 DIN	3240101	100
10.50	C-RC 25/M10 DIN	3240102	100
13.00	C-RC 25/M12 DIN	3240103	100
17.00	C-RC 25/M16 DIN	3240104	100
- 2 AWG / - 35 mm² - color = silver			
6.50	C-RC 35/M6 DIN	3240105	100
8.40	C-RC 35/M8 DIN	3240106	100
10.50	C-RC 35/M10 DIN	3240107	100
13.00	C-RC 35/M12 DIN	3240108	100
17.00	C-RC 35/M16 DIN	3240109	100
- 1/0 AWG / - 50 mm² - color = silver			
6.50	C-RC 50/M6 DIN	3240110	100
8.40	C-RC 50/M8 DIN	3240111	100
10.50	C-RC 50/M10 DIN	3240112	100
13.00	C-RC 50/M12 DIN	3240113	100
17.00	C-RC 50/M16 DIN	3240114	100

Dimensions	Ordering data		
Hole	Description	Order No.	Pcs/Pkg
- 2/0 AWG / - 70 mm² - color = silver			
6.50	C-RC 70/M6 DIN	3240115	100
8.40	C-RC 70/M8 DIN	3240116	100
10.50	C-RC 70/M10 DIN	3240117	100
13.00	C-RC 70/M12 DIN	3240118	100
17.00	C-RC 70/M16 DIN	3240119	100
- 3/0 AWG / - 95 mm² - color = silver			
8.40	C-RC 95/M8 DIN	3240120	50
10.50	C-RC 95/M10 DIN	3240121	50
13.00	C-RC 95/M12 DIN	3240122	50
17.00	C-RC 95/M16 DIN	3240123	50
- 4/0 AWG / - 120 mm² - color = silver			
17.00	C-RC 120/M16 DIN	3240127	25
250 AWG / 120 mm² - color = silver			
8.40	C-RC 120/M8 DIN	3240124	25
10.50	C-RC 120/M10 DIN	3240125	25
13.00	C-RC 120/M12 DIN	3240126	25
300 AWG / 150 mm² - color = silver			
10.50	C-RC 150/M10 DIN	3240128	25
13.00	C-RC 150/M12 DIN	3240129	25
17.00	C-RC 150/M16 DIN	3240130	25
350 AWG / 185 mm² - color = silver			
10.50	C-RC 185/M10 DIN	3240131	20
13.00	C-RC 185/M12 DIN	3240132	20
17.00	C-RC 185/M16 DIN	3240133	20
500 AWG / 240 mm² - color = silver			
10.50	C-RC 240/M16 DIN	3240134	10
13.00	C-RC 240/M16 DIN	3240135	10
17.00	C-RC 240/M16 DIN	3240136	10

Fork-type cable lugs, uninsulated

The fork-type cable lugs without insulation have a hard-soldered neck. When used in conjunction with the CRIMPFOX-RC... pliers, they achieve maximum conductor pull-out forces.



Dimensions	Ordering data		
Fork size	Description	Order No.	Pcs/Pkg
20 - 16 AWG / 0.5 - 1.5 mm² - color = silver			
3.20	C-FC 1,5/M3 DIN	3240137	100
3.70	C-FC 1,5/M3,5 DIN	3240138	100
4.30	C-FC 1,5/M4 DIN	3240139	100
5.30	C-FC 1,5/M5 DIN	3240140	100
6.40	C-FC 1,5/M6 DIN	3240141	100
16 - 14 AWG / 1.5 - 2.5 mm² - color = silver			
3.20	C-FC 2,5/M3 DIN	3240142	100
3.70	C-FC 2,5/M3,5 DIN	3240143	100
4.30	C-FC 2,5/M4 DIN	3240144	100
5.30	C-FC 2,5/M5 DIN	3240145	100
6.40	C-FC 2,5/M6 DIN	3240146	100
8.40	C-FC 2,5/M8 DIN	3240147	100
17.00	C-RC 120/M16 DIN	3240127	25
12 - 10 AWG / 4 - 6 mm² - color = silver			
4.30	C-FC 6/M4 DIN	3240148	50
5.30	C-FC 6/M5 DIN	3240149	50
6.40	C-FC 6/M6 DIN	3240150	50
8.40	C-FC 6/M8 DIN	3240151	50

CRIMPFOX – corresponding connectors for the CRIMPFOX series

Fork-type cable lugs, insulated				Slip-on sleeves and blade connectors, insulated			
The insulated fork-type cable lugs are halogen-free and feature “EASY ENTRY” technology. When used in conjunction with the CRIMPFOX-RCI pliers, these cable lugs achieve maximum conductor pull-out forces.				The insulated slip-on blade connectors and slip-on sleeves with plastic collars feature easy and safe conductor insertion with “EASY ENTRY” technology, a hard-soldered crimping zone for maximum pull-out forces, electrolytic tin plating, and they are halogen-free.			
Description According to UL Material / coating: copper / tin-plated Temperature range: -20 ... 105°C				Description Slip-on sleeve , insulated according to UL Material / coating: brass / tin-plated Temperature range: -20 ... 105°C			
Fork size	Description	Order #	Pcs/Pkg	Width	Description	Order #	Pcs/Pkg
20 – 16 AWG / 0.5 – 1.5 mm² – color = red				20 – 16 AWG / 0.5 – 1.5 mm² – color = red			
3.20	C-FCI 1,5/M3 DIN	3240032	100	2.80	C-SCFI 1,5/2,8X0,5	3240048	100
3.70	C-FCI 1,5/M3,5 DIN	3240033	100	2.80	C-SCFI 1,5/2,8X0,8	3240049	100
4.30	C-FCI 1,5/M4 DIN	3240034	100	4.80	C-SCFI 1,5/4,8X0,5	3240050	100
5.30	C-FCI 1,5/M5 DIN	3240035	100	4.80	C-SCFI 1,5/4,8X0,8	3240051	100
6.50	C-FCI 1,5/M6 DIN	3240036	100	6.30	C-SCFI 1,5/6,3X0,8	3240052	100
16 – 14 AWG / 1.5 – 2.5 mm² – color = blue				16 – 14 AWG / 1.5 – 2.5 mm² – color = blue			
3.20	C-FCI 2,5/M3 DIN	3240037	100	4.80	C-SCFI 2,5/4,8X0,5	3240053	50
3.70	C-FCI 2,5/M3,5 DIN	3240038	100	4.80	C-SCFI 2,5/4,8X0,8	3240054	50
4.30	C-FCI 2,5/M4 DIN	3240039	100	6.30	C-SCFI 2,5/6,3X0,8	3240055	50
5.30	C-FCI 2,5/M5 DIN	3240040	50	12 – 10 AWG / 4 – 6 mm² – color = yellow			
6.50	C-FCI 2,5/M6 DIN	3240041	50	6.30	C-SCFI 6/6,3X0,8	3240056	50
12 – 10 AWG / 4 – 6 mm² – color = yellow				Slip-on blade connectors			
20 – 16 AWG / 0.5 – 1.5 mm² – color = red				20 – 16 AWG / 0.5 – 1.5 mm² – color = red			
4.30	C-FCI 6/M4 DIN	3240042	50	6.30	C-SCMI 1,5/6,3X0,8	3240058	100
5.30	C-FCI 6/M5 DIN	3240043	50	16 – 14 AWG / 0.5 – 1.5 mm² – color = blue			
6.50	C-FCI 6/M6 DIN	3240044	25	6.30	C-SCMI 2,5/6,3X0,8	3240059	50
8.50	C-FCI 6/M8DIN	3240045	25	12 – 10 AWG / 4 – 6 mm² – color = yellow			
				6.30	C-SCMI 2,5/6,3X0,8	3240060	50

Flat pin cable lugs with hooks, insulated				Flat pin cable lugs, straight, insulated				
The insulated flat pin cable lugs with plastic collars feature easy and safe conductor insertion with “EASY ENTRY” technology, electrolytic tin plating, and they are halogen-free.				Easy and safe conductor insertion with “EASY ENTRY,” hard-soldered crimping zone for maximum conductor pull-out forces in conjunction with the CRIMPFOX RCI... pliers, electrolytically tin-plated, halogen-free.				
Description Material / coating: copper / tin-plated Temperature range: -20 ... 105°C				Description Material / coating: copper / electrolytically tin-plated Temperature range: -20 ... 105°C				
Pin width	Description	Order No.	Pcs/Pkg	Pin Width	Pin dim.	Description	Order No.	Pcs/Pkg
20 – 16 AWG / 0.5 – 1.5 mm² – color = red				20 – 16 AWG / 0.5 – 1.5 mm² - color = red				
2.80	C-BCI 1,5/2,8	3240015	100	2.80	19.5 x 2.8	C-BCSI 1,5/9X2,8	3240531	100
4.60	C-BCI 1,5/4,6	3240568	100	16- 14 AWG / 1.5 – 1.5 mm² - color = blue				
16 – 14 AWG / 1.5 – 1.5 mm² – color = blue				2.80	32 x 4.5	C-BCSI 2,5/9X2,8	3240532	100
12 – 10 AWG / 4 – 6 mm² – color = yellow				12 – 10 AWG / 4 – 6 mm² – color = yellow				
2.80	C-BCI 2,5/2,8	3240046	100	2.80	32 x 4.5	C-BCSI 6/10X2,8	3240546	100
4.60	C-BCI 2,5/4,6	3240569	100	4.50	24 x 2.8	C-BCSI 6/18X4,5	3240533	50
12 – 10 AWG / 4 – 6 mm² – color = yellow								
2.80	C-BCI 6/2,8	3240047	50					
4.60	C-BCI 6/4,6	3240570	50					

CRIMPFOX – corresponding connectors for the CRIMPFOX series

Pin cable lugs, insulated						Butt connectors, fully insulated					
The insulated pin cable lugs with plastic collars feature easy and safe conductor insertion with “EASY ENTRY” technology, hard-soldered crimping zone for maximum pull-out forces, and electrolytic tin plating, and they are halogen-free.						Conductor push-through protection, hard-soldered crimping zone for maximum conductor pull-out forces in conjunction with the CRIMPFOX RCI... pliers, electrolytically tin-plated, halogen-free.					
											
Description Insulated according to UL Material / coating: copper / tin-plated Temperature range: -20 ... 105°C						Description Material / coating: copper / electrolytically tin-plated Temperature range: -20 ... 105°C					
Cross-section		Color	Pin Ø	Description	Order No.	Cross-section		Color	Width	Description	Order No.
mm²	AWG		mm			mm²	AWG		mm		
0.5 - 1	20 - 16	red	2.00	C-PCI 1,5/2	3240064	0 - 1.5	20 - 16	red	4.00	C-JCI 1,5	3240061
1.5 - 2.5	16 - 14	blue	2.00	C-PCI 2,5/2	3240066	1.5 - 2.5	16 - 14	blue	4.50	C-JCI 2,5	3240062
4 - 6	12 - 10	yellow	2.70	C-PCI 6/2,7	3240068	4 - 6	12 - 10	yellow	6.00	C-JCI 6	3240063

Pin cable lugs, insulated with additional crimp zone						Slip-on sleeves, fully insulated					
The insulated pin cable lugs with plastic collars feature easy and safe conductor insertion with “EASY ENTRY” technology, hard-soldered crimping zone for maximum pull-out forces, and electrolytic tin plating, and they are halogen-free.						Easy and safe conductor insertion with “EASY ENTRY,” hard-soldered crimping zone for maximum conductor pull-out forces in conjunction with the CRIMPFOX RCI... pliers, electrolytically tin-plated, halogen-free.					
											
Description Material / coating: copper / tin-plated Temperature range: -20 ... 105°C						Description For connectors Material / coating: brass / electrolytically tin-plated Temperature range: -20 ... 105°C					
Cross-section		Color	Pin Ø	Description	Order No.	Dimensions	Description	Order #	Pcs/Pkg		
mm²	AWG		mm								
0.5 - 1	20 - 16	red	2.00	C-PCEI 1,5/2	3241215	20 - 16 AWG / 0.5 - 1.5 mm² - color = red					
1.5 - 2.5	16 - 14	blue	2.00	C-PCEI 2,5/2	3241216	2.8 x 0.5 mm	C-SCFFI 1,5/2,8X0,5	3240534	50		
4 - 6	12 - 10	yellow	2.70	C-PCEI 6/2	3241217	2.8 x 0.8 mm	C-SCFFI 1,5/2,8X0,8	3240535	50		
						4.8 x 0.5 mm	C-SCFFI 1,5/4,8X0,5	3240536	50		
						4.8 x 0.8 mm	C-SCFFI 1,5/4,8X0,8	3240537	50		
						6.3 x 0.5 mm	C-SCFFI 1,5/6,3X0,8	3240538	50		
						16 - 14 AWG / 1.5 - 1.5 mm² - color = blue					
						4.8 x 0.5 mm	C-SCFFI 2,5/4,8X0,5	3240539	50		
						4.8 x 0.8 mm	C-SCFFI 2,5/4,8X0,8	3240540	50		
						6.3 x 0.5 mm	C-SCFFI 2,5/6,3X0,8	3240547	25		
						12 - 10 AWG / 4 - 6 mm² - color = yellow					
						6.3 x 0.8 mm	C-SCFFI 6/6,3X0,8	3240541	25		

Slip-on distributors, insulated					
Easy and safe conductor insertion with “EASY ENTRY,” hard-soldered crimping zone for maximum conductor pull-out forces in conjunction with the CRIMPFOX RCI... pliers, electrolytically tin-plated, halogen-free.					
					
Description For 6.3 x 0.8 mm connectors and sleeves Material / coating: brass / electrolytically tin-plated Temperature range: -20 ... 105°C					
Cross-section		Color	Width	Description	Order No.
mm²	AWG		mm		
0.5 - 1	20 - 16	red	6.30	C-SCFMI 1,5/6,3X0,8	3240529
1.5 - 2.5	16 - 14	blue	6.30	C-SCFMI 2,5/6,3X0,8	3240530

Tool and crimp sets



CRIMPSET 6

Order No. [1202072](#)

Assortment box, metal

Consisting of:

- Ferrules according to DIN 46228-4: 1990-09, CSA-certified
 - 500 pcs. each of:
 - AI 0,25-6 YE
 - AI 0,34-6 TQ
 - AI 0,5-8 WH
 - AI 0,75-8 GY
 - AI 1-8 RD
 - AI 1,5-8 BK
 - 300 pcs.:
 - AI 2,5-8 BU
 - 200 pcs.:
 - AI 4-10 GY
 - 100 pcs.:
 - AI 6-12 YE
- Stripping tool for cables and conductors up to 6 mm², QUICK WIREFOX 6
- Crimping pliers with integrated pressure lock for ferrules from 0.5 to 6 mm², front entry, CRIMPFOX Duo 10

CRIMPSET 6/25 EMPTY

[1204041](#)



CRIMPSET 25

Order No. [1202580](#)

Assortment box, metal

Consisting of:

- Ferrules according to DIN 46228-4: 1990-09, CSA-certified
 - 300 pcs.:
 - AI 10-12 RD
 - 200 pcs.:
 - AI 16-12 BU
 - 100 pcs.:
 - AI 25-16 YE
- Stripping tool for dismantling cables from 4.5 to 40 mm Ø, WIREFOX-D 40
- Crimping pliers with integrated pressure lock for ferrules from 10 to 25 mm², lateral entry, CRIMPFOX 25R



AI SORTI BOX RD

Order No. [3202960](#)

Assortment box, red

Consisting of:

- Ferrules according to DIN 46228-4, CSA-certified
 - 50 pcs. each of:
 - AI 0,5-8 WH, AI 2,5-8 BU
 - 100 pcs. each of:
 - AI 0,75-8 GY, AI 1-8 RD, AI 1,5-8 BK

For further assortment boxes, see www.phoenixcontact.net/products

- **AI-TWIN SORTI BOX BU** [3202986](#)
- **AI-TWIN SORTI BOX GY** [3202999](#)
- **AI SORTI BOX ANT** [3202973](#)



TOOL DATA SET

Order No. [1208856](#)

Set for cutting, stripping, and crimping

Consisting of:

- Cable cutter for copper and aluminum up to 12 mm in diameter, CUTFOX 12
- Stripping tool for dismantling multi-strand signal, control, and fiberglass cables 2.5 - 11 mm in diameter, WIREFOX-D11
- Basic pliers for accommodating dies for various contact types, CRIMPFOX-M
- Die for CRIMPFOX-M for unshielded RJ45 connectors



TOOL SET ALLROUND 2

Order No. [1208843](#)

Set for cutting, stripping, and crimping

Consisting of:

- Cable cutter for copper and aluminum up to 12 mm in diameter, CUTFOX 12
- Stripping tool for cables and conductors from 0.02 to 10 mm², WIREFOX 10
- Crimping pliers with integrated pressure lock for ferrules from 0.14 to 10 mm², CRIMPFOX 10S



TOOL-KIT SOLAR

Order No. [1212071](#)

Set for cutting, stripping, and crimping

Consisting of:

- Cable cutter CUTFOX 16 VDE
- Strippers for solar cables; WIREFOX- SR 6 & WIREFOX-D SR 6-1
- Crimping plier CRIMPFOX-M and dies for MC3, MC4 and SOLARLOK connectors
- 2 Phillips head and 2 flat head VDE screwdrivers

Tool sets

Universal tool sets for convenient on-site use, equipped with cutting, stripping, and testing tools from the TOOL fox tool range. The pockets are made from robust, durable material.



Description	Order No.	TOOL-KIT STANDARD	1212422
Set for cutting, stripping, crimping, and screwing, consisting of:		CUTFOX 18	Front cable cutter for copper and aluminum up to 18 mm in diameter (up to 50 mm ²)
		WIREFOX-D 40	Dismantling tool for dismantling cables 4.5 - 40 mm in diameter, insulation thickness of up to 4.5 mm
		WIREFOX 10	Stripping pliers for stripping cables and conductors from 0.02 to 10 mm ²
		CRIMPFOX 6S-F	Crimping pliers for ferrules with self-adjusting die, front conductor entry, and unlockable pressure lock
		SZF 1-0,6X3,5	Screwdriver
		TOOL-KIT STANDARD EMPTY	Tool kit, empty, 1212423
		TOOL-ZIP BASE CASE EMPTY	Tool zip case empty, with shoulder strap 1005050



Description	Order No.	TOOL-CASE	1212629
Lockable tool case with adjustable strap, equipped with each of the following tools:		CUTFOX 12	Cable cutter for copper and aluminum conductors up to 12 mm in diameter (up to 35 mm ²)
		CUTFOX-S VDE	Diagonal cutter for copper and aluminum conductors, VDE-tested
		MICROFOX-SB	Electronic diagonal cutter
		WIREFOX 10	Stripping pliers for stripping conductors up to 10 mm ²
		WIREFOX-D 13	Stripping tool for dismantling cables from 8 to 13 mm
		WIREFOX-D 28	Stripping tool for dismantling cables from 8 to 28 mm
		WIREFOX-D 11	Stripping tool for dismantling signal, control, and fiberglass cables up to 11 mm, insulation thickness of up to 1 mm
		CRIMPFOX-M SET	Crimping pliers set for ferrules and insulated and uninsulated cable lugs
		CRIMPFOX-M RCI 6/DIE	Die for CRIMPFOX-M for uninsulated cable lugs, stackable storage box
		UNIFOX-C VDE	Combination pliers, VDE version
		UNIFOX-P VDE	Needle-nose pliers, VDE version
		UNIFOX-WP	Water pump pliers
		SZS 0,4x2,5 VDE	Screwdriver, bladed, blade: 0.4 x 2.5 x 80 mm, length: 161 mm, VDE version
		SZS 0,5x3,0 VDE	Screwdriver, bladed, blade: 0.5 x 3.0 x 100 mm, length: 181 mm, VDE version
		SZS 1,0x4,0 VDE	Screwdriver, bladed, blade: 1.0 x 4.0 x 100 mm, length: 198 mm, VDE version
		SZS 1,0x6,5 VDE	Screwdriver, bladed, blade: 1.0 x 6.5 x 150 mm, length: 248 mm, VDE version
		SZK PH0 VDE	Screwdriver for Phillips Recess screws, size: 0, VDE version
		SZK PH1 VDE	Screwdriver for Phillips Recess screws, size: 1, VDE version
		SZK PH2 VDE	Screwdriver for Phillips Recess screws, size: 2, VDE version
		DUSPOL EXPERT	Voltage tester for DC and AC voltages from 12 V to 1000 V AC/1100 V DC, IP65
		USS 4	Control cabinet key, metal, for all common control cabinets
		AI SORTI BOX RD	Assortment box with ferrules, 50 pcs. each of: AI 0,5-8 WH, AI 2,5-8 BU; 100 pcs. each of: AI 0,75-8 GY, AI 1-8 RD, AI 1,5-8 BK
		AI-TWIN SORTI BOX BU	Assortment box with TWIN ferrules, 50 pcs. each of: AI-TWIN 2x0,5-8 WH, AI-TWIN 2x0,75-8 GY, AI-TWIN 2x1-8 RD, AI-TWIN 2x 1,5-8 BK; 25 pcs. each of: AI-TWIN 2x2,5-10 BU
		Cutting knife	With segment blade
		Measuring tape	5 m
		TOOL-CASE EMPTY	Tool case, lockable, with elasticated straps to hold tools in place, empty, 1212628

Tool sets

Universal tool sets for convenient on-site use, equipped with cutting, stripping, and testing tools from the TOOL fox tool range. The pockets are made from robust, durable material.



Description	Order No.	TOOL-WRAP	1212505	TOOL-WRAP 2	1200100
Tool wrap equipped with each of the following tools:		CUTFOX 16 VDE	Cable cutter for copper and aluminum conductors, VDE-tested	CRIMPFOX CENTRUS 6H	
		CUTFOX-S VDE	Diagonal cutter for copper and aluminum conductors, VDE-tested	CUTFOX 18	
		PROFIPOLE	Voltage tester for DC and AC voltages from 6 V to 400 V, IP65	WIREFOX 10	
		SZK PH0	Screwdriver for Phillips Recess screws, size: 0	WIREFOX 16-1	
		SZK PH1	Screwdriver for Phillips Recess screws, size: 1	WIREFOX D40	
		SZK PH2	Screwdriver for Phillips Recess screws, size: 2	Tool set SF-SL/PH/PZ-SL SET S-VDE	
		SZS 0,4X2,5	Screwdriver, bladed, blade: 0.4 x 2.5 x 80 mm, length: 161 mm		
		SZS 0,5X3,0	Screwdriver, bladed, blade: 0.5 x 3.0 x 100 mm, length: 181 mm		
		SZS 1,0X4,0	Screwdriver, bladed, blade: 1.0 x 4.0 x 100 mm, length: 198 mm		
		SZS 1,0X6,5	Screwdriver, bladed, blade: 1.0 x 6.5 x 150 mm, length: 248 mm		
		UNIFOX-C VDE	Combination pliers, VDE version		
		UNIFOX-P VDE	Needle-nose pliers, VDE version		
		TOOL-WRAP EMPTY	Tool wrap, empty, 1212501		



Description	Order No.	TOOL-BAG	1212504
Tool bag with laptop and document compartments, equipped with each of the following tools:		AI SORTI BOX RD	Assortment box, with ferrules, 50 pcs. each of: AI 0,5-8 WH, AI 2,5-8 BU; 100 pcs. each of: AI 0,75-8 GY, AI 1-8 RD, AI 1,5-8 BK
		CRIMPFOX-M SET	Crimping pliers set for ferrules and insulated and uninsulated cable lugs
		CUTFOX 25 VDE	Cable cutter for copper and aluminum conductors, VDE-tested
		CUTFOX-S VDE	Diagonal cutter for copper and aluminum conductors, VDE-tested
		DUSPOL EXPERT	Voltage tester for DC and AC voltages from 12 V to 1000 V AC/1100 V DC, IP65
		SZK PH0	Screwdriver for Phillips Recess screws, size: 0
		SZK PH1	Screwdriver for Phillips Recess screws, size: 1
		SZK PH2	Screwdriver for Phillips Recess screws, size: 2
		SZS 0,4X2,5	Screwdriver, bladed, blade: 0.4 x 2.5 x 80 mm, length: 161 mm
		SZS 0,5X3,0	Screwdriver, bladed, blade: 0.5 x 3.0 x 100 mm, length: 181 mm
		SZS 1,0X4,0	Screwdriver, bladed, blade: 1.0 x 4.0 x 100 mm, length: 198 mm
		SZS 1,0X6,5	Screwdriver, bladed, blade: 1.0 x 6.5 x 150 mm, length: 248 mm
		UNIFOX-C VDE	Combination pliers, VDE version
		UNIFOX-P VDE	Needle-nose pliers, VDE version
		UNIFOX-WP	Water pump pliers
		USS 4	Control cabinet key, metal, for all common control cabinets
		WIREFOX 10	Stripping tool for cables and conductors from 4 to 16 mm², stripping length up to 18 mm
		WIREFOX-D 40	Stripping tool for dismantling cables from 4.5 mm to 40 mm, insulation thickness of up to 4.5 mm
		Cutting knife	With segment blade
		Measuring tape	5 m
		TOOL-BAG EMPTY	Tool bag, with document and laptop compartments, empty, 1212500

Tool sets

Universal tool sets for convenient on-site use, equipped with cutting, stripping, and testing tools from the TOOL fox tool range. The pockets are made from robust, durable material.



Description	Order No.	TOOL-CARRIER	1212503
Tool bag equipped with each of the following tools:		CRIMPFOX-M	Basic pliers for accommodating dies for various contact types
		CRIMPFOX-M 10/DIE	Die for CRIMPFOX-M, for 0.25 - 10 mm² ferrules, stackable storage box
		CUTFOX 18	Cable cutter for copper and aluminum conductors
		CUTFOX-S VDE	Diagonal cutter for copper and aluminum conductors, VDE-tested
		PROFIPOLE	Voltage tester for DC and AC voltages from 6 V to 400 V, IP65
		SZK PH0	Screwdriver for Phillips Recess screws, size: 0
		SZK PH1	Screwdriver for Phillips Recess screws, size: 1
		SZK PH2	Screwdriver for Phillips Recess screws, size: 2
		SZS 0,4X2,5	Screwdriver, bladed, blade: 0.4 x 2.5 x 80 mm, length: 161 mm
		SZS 0,5X3,0	Screwdriver, bladed, blade: 0.5 x 3.0 x 100 mm, length: 181 mm
		SZS 1,0X4,0	Screwdriver, bladed, blade: 1.0 x 4.0 x 100 mm, length: 198 mm
		SZS 1,0X6,5	Screwdriver, bladed, blade: 1.0 x 6.5 x 150 mm, length: 248 mm
		UNIFOX-CE VDE	Combination pliers, angled, VDE version
		UNIFOX-P VDE	Needle-nose pliers, VDE version
		UNIFOX-WP	Water pump pliers
		USS 4	Control cabinet key, metal, for all common control cabinets
		WIREFOX 10 VDE	Stripping pliers for stripping conductors up to 10 mm²
		WIREFOX-D 13	Stripping tool for dismantling cables from 8 to 13 mm
		WIREFOX-D 28	Stripping tool for dismantling cables from 8 to 28 mm
		Cutting knife	With segment blade
		Measuring tape	5 m
		TOOL-CARRIER EMPTY	Tool bag, empty, 1212499



Description	Order No.	TOOL-BELTPOUCH	1212506
Tool belt pouch equipped with each of the following tools:		CUTFOX 18	Cable cutter for copper and aluminum conductors up to 18 mm in diameter (up to 50 mm²)
		CUTFOX-S VDE	Diagonal cutter for copper and aluminum conductors, VDE-tested
		PROFIPOLE	Voltage tester for DC and AC voltages from 6 V to 400 V, IP65
		SZK PH1	Screwdriver for Phillips Recess screws, size: 1
		SZK PH2	Screwdriver for Phillips Recess screws, size: 2
		SZS 0,5X3,0	Screwdriver, bladed, blade: 0.5 x 3.0 x 100 mm, length: 181 mm
		SZS 1,0X4,0	Screwdriver, bladed, blade: 1.0 x 4.0 x 100 mm, length: 198 mm
		SZS 1,0X5,5	Screwdriver, bladed, blade: 1.0 x 5.5 x 125 mm, length: 223 mm
		UNIFOX-CE VDE	Combination pliers, angled, VDE version
		USS 4	Control cabinet key, metal, for all common control cabinets
		WIREFOX-D 13	Stripping tool for dismantling cables from 8 to 13 mm
		Cutting knife	With segment blade
		Measuring tape	5 m
		TOOL-BELTPOUCH EMPTY	Tool-belt pouch, empty, 1212502

For screwdriver sets, see page 49

SCREWFOX

Screwdrivers and torque screwdrivers

Phoenix Contact's screwdrivers are tailored to fit a multitude of screws. The product line features ergonomically designed handles, durable, specially hardened and tempered drives, and precise torque levels. Adjustable torque and cordless screwdrivers complete the product range.

Ergonomic and durable

Phoenix Contact has the right tool for you, with a wide variety of bits, drives, sizes, and cordless and manual torque options.

- ✓ Durable, specially hardened and tempered drives
- ✓ High torque transmission with special two-component handle geometry
- ✓ Solid, high-quality components and raw materials



Maximum force transmission

Two-component, ergonomically designed handles ensure an optimum grip and help prevent fatigue when working.



Precise torque

Finely adjustable torque enables optimum adaptation to various screw sizes and ensures a consistent torque at all times.



SF-M set

Fit any application with this bit screwdriver set with quick-action chuck.



SCREWFOX screwdriver tools

Screwdrivers for actuating spring-cage and fast-connection terminal blocks

In addition to their standard application, the SZF series screwdrivers are also ideal for actuating modular terminal blocks from the ST... and QTC... series.				
Description	Order No.	Uninsulated	Insulated	
Blade: 0.4 x 2.5 x 75 mm, length: 156 mm		SZF 0-0,4X2,5 1204504		
Blade: 0.6 x 3.5 x 100 mm, length: 181 mm		SZF 1-0,6X3,5 1204517	SZS 0,6X3,5 1205053	ST-BW 1207608 ST-BW 0 1200135
Blade: 0.8 x 4.0 x 100 mm, length: 198 mm		SZF 2-0,8X4,0 1204520		Spin Top
Blade: 1.0 x 5.5 x 150 mm, length: 248 mm		SZF 3-1,0X5,5 1206612		SZS 0,4X2,0 1205202

VDE screwdrivers, slender design

Because the insulation runs into the shaft, there is no protruding edge. This means that even deeper-lying screws can be reached with ease.				
Description	Order No.	SF-SL 0,6X3,5-100 S VDE 1212587 SF-SL 0,8X4,0-100 S VDE 1212588 SF-SL 1,0X5,5-125 S VDE 1212589	SF-PZ1-80 S VDE 1212695 SF-PZ2-100 S VDE 1212696 SF-PH1-80 S VDE 1212693 SF-PH2-100 S VDE 1212694	SF-PZSL 1-80 S VDE 1212699 SF-PZSL 2-100 S VDE 1212700

Bladed screwdrivers, VDE bladed screwdrivers

The blades of Phoenix Contact screwdrivers have a large bearing surface in the screw head. This is the only way to achieve the required torque.				
Description	Order No.	Insulated SZS 0,4X2,5 1205037 SZS 0,5X3,0 1207404 SZS 0,6X2,5 1205040 SZS 0,6X3,5 1212602 SZS 0,8X4,0 1212508 SZS 1,0X4,0 1205066 SZS 1,0X5,5 1209114 SZS 1,0X6,5 1205079 SZS 1,2X8,0 1205082	Uninsulated SF-SL 0,4X2,0-60 1212546 SF-SL 0,4X2,5-75 1212547 SF-SL 0,5X3,0-80 1212548 SF-SL 0,6X3,5-100 1212549 SF-SL 0,6X3,5-200 1212550 SF-SL 0,8X4,0-100 1212551 SF-SL 1,0X5,5-150 1212552 SF-SL 1,2X6,5-150 1212553	SF-SLIC 1,2X7,0-125 1212554 SF-SLIC 1,6X10,0-175 1212555

VDE crosshead screwdrivers with Phillips and Pozidriv drive

The VDE-insulated screwdrivers for Phillips screws are available as Pozidriv/ Supadriv and Phillips Recess versions.			
Description	Order No.	SZK PZ0 1206447 SZK PZ1 1206450 SZK PZ2 1206463 SZK PZ3 1212599	SZK PH0 1205147 SZK PH1 1205150 SZK PH2 1205163 SZK PH3 1212536

SCREWFOX screwdriver tools

Crosshead screwdrivers with Phillips and Pozidriv drive

			
			
Description	Order No.		
Size: PZ/PH0 x 60 mm, length: 141 mm	SF-PZ 0-60 1212562	SF-PH 0-60 1212558	
Size: PZ/PH1 x 80 mm, length: 178 mm	SF-PZ 1-80 1212563	SF-PH 1-80 1212559	
Size: PZ/PH2 x 100 mm, length: 205 mm	SF-PZ 2-100 1212564	SF-PH 2-100 1212560	
Size: PZ/PH3 x 150 mm, length: 262 mm	SF-PZ 3-150 1212565	SF-PH 3-150 1212561	

VDE screwdrivers with plus/minus drive and for test socket screws

The SZG... screwdrivers have been specially designed for driving in test socket screws with a diameter of 2.3 and 4 mm safely and without slipping.

			
			
Description	Order No.		
Blade: 0.6 x 3.5 x 100 mm, length: 198 mm	SF-PZSL 1-80 1212556	SF-PHSL 1-80 1212283	SZG 0,6X3,5 1205121
Blade: 0.9 x 6.5 x 175 mm, length: 287 mm	SF-PZSL 2-100 1212557	SF-PHSL 2-100 1212288	SZG 0,9X6,5 1205134

Hexagonal socket wrenches and screwdrivers

Socket wrenches for tightening hexagonal screws and nuts. Two-component, ergonomically designed handles ensure an optimum grip. The Allen key set is a 9-piece set from 1.5 to 10 mm.

			
			
Description	Order No.		
Wrench size: 5.0 mm		Hexagonal socket wrench	Allen key set
Wrench size: 5.5 mm	SHN 5.5 1209855		SF-LHEX SET 1212544
Wrench size: 6.0 mm			
Wrench size: 8.0 mm	SHN 8 1209868		Torxd SET, TX 8-40
Wrench size: 13 mm	SHN 13 1209923		SF-LTX SET 1200162

SCREWFOX screwdriver tools

Torque screwdrivers with hexagonal fast-connection holder

The high-precision, finely adjustable torque screwdrivers according to EN ISO 6789 are optimally tailored to Phoenix Contact products with a screw connection.



Description	Order No.	TSD-M 1,2NM TSD-M 3NM	1212224 1212225	TSD-M 6NM	1212226	S-M BH	1212070
Torque		0.3 - 1.2 Nm, 1.2 - 3.0 Nm		3.0 - 6.0 Nm			
Accessories							
Adapter insert		TSD-M SAC-BIT ADAPTER 1212600					

Hexagonal torque screwdriver with preset torque

The preset 4 mm hexagonal torque screwdrivers are ideal for tightening pressure nuts and sensor/actuator cables of distributor boxes from the PLUSCON product range.



Description	Order No.	Accessories: nuts for					
Blade: hexagonal, 4 mm, 0.2 Nm	TSD 02 SAC	1208487	M8 SAC cable/connector with QUICKON connection	SAC BIT M8-D10	1208461		
Blade: hexagonal, 4 mm, 0.4 Nm	TSD 04 SAC	1208429	M8 connector for assembly	SACC BIT M8-D12	1208474		
Blade: hexagonal, 4 mm, 0.8 Nm	TSD 08 SAC	1212597	M12 SAC cable/connector with QUICKON connection	SAC BIT M12-D15	1208432		
Blade: hexagonal, 4 mm, 2.0 Nm	TSD 20 SAC	1212020	M12 connector for assembly	SACC BIT M12-D20	1208445		
Blade: hexagonal, 4 mm, 2.5 Nm	TSD 25 SAC	1212315	Pressure nuts, wrench size: 13 mm	SAC BIT QUICKON-W13	1212033		
			Pressure nuts, wrench size: 24 mm	SAC BIT HOOD-W24	1212486		
			M12 SAC cable/connector, hexagonal knurl	SAC BIT M12-W14	1212513		
			7/8 inch SAC cable/connector	SAC BIT MIN-D25	1212512		

Newton meters-to-inch-pounds conversion chart

Newton meters	Inch pounds	Newton meters	Inch pounds	Newton meters	Inch pounds
0.2	1.77	2.6	23.01	10.5	92.93
0.3	2.65	2.7	23.89	11.0	97.35
0.4	3.54	2.8	24.78	11.5	101.78
0.5	4.42	2.9	25.66	12.0	106.20
0.6	5.31	3.0	26.55	12.5	110.63
0.7	6.19	3.2	28.32	13.0	115.05
0.8	7.08	3.3	29.20	13.5	119.48
0.9	7.96	3.4	30.09	14.0	123.91
1.0	8.85	3.5	30.97	14.5	128.33
1.2	10.62	4.0	35.40	15.0	132.76
1.3	11.50	4.5	39.82	15.5	137.18
1.4	12.39	5.0	44.25	16.0	141.61
1.5	13.27	5.5	48.67	16.5	146.03
1.6	14.16	6.0	53.10	17.0	150.46
1.7	15.04	6.5	57.52	17.5	154.88
1.8	15.93	7.0	61.95	18.0	159.31
1.9	16.81	7.5	66.38	18.5	163.73
2.0	17.70	8.0	70.80	19.0	168.16
2.2	19.47	8.5	75.23	19.5	172.58
2.3	20.35	9.0	79.65	20.0	177.01
2.4	21.24	9.5	84.08	25.0	221.26
2.5	22.12	10.0	88.50	30.0	265.52

Two speeds

Conveniently switch between the two speeds of the cordless screwdriver via a switch on the upper side

Universal bits

For accommodating 6.3 mm bits for all standard applications

Adjustable torque

The 32-stage (16 in low, 16 in high) adaptability ensures reliable, convenient torque settings

Robust

High-quality materials and precise manufacturing

Ergonomic

Comfortable, one-handed operation in a straight or angled position

Easy directional change

Change the direction of rotation conveniently via the toggle switch

Secure lock function

A switch on the handle of the SF-ASD16 guarantees that the cordless screwdriver is activated only when in use

Safe and comfortable

Perfectly balanced and compact design. The soft plastic areas in the handle prevent the tool from slipping

Powerful

The high-powered battery enables a large number of screw applications per charging cycle

Durable

With the charger, the high-quality Li-ion battery is fully charged and ready for use in one hour without affecting the memory

 Web code: #1758				
Description	Cordless screwdriver set	Cordless screwdriver	Charger	Battery
Description	SF-ASD 16 SET	SF-ASD 16	SF-ASD 16/CHARGER	SF-ASD 16/ACCU 2.0 AH
Order No.	1200295	1200294	1200296	1314530



Torque-adjustment ring inch-pounds*																
Setting	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Symbol
Speed 1 (RPM 220)	1.15	1.86	2.48	3.19	3.89	4.60	5.31	6.02	6.64	7.35	8.05	0.99	9.47	10.27	11.06	38.32
Speed 2 (RPM 450)	1.06	1.86	2.57	3.36	4.16	4.96	5.75	6.55	7.26	8.05	8.85	9.65	10.44	11.33	12.21	24.25
Torque-adjustment ring Newton meter*																
Setting	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Symbol
Speed 1 (RPM 220)	0.13	0.21	0.28	0.36	0.44	0.52	0.60	0.68	0.75	0.83	0.91	0.99	1.07	1.16	1.25	4.33
Speed 2 (RPM 450)	0.12	0.21	0.29	0.38	0.47	0.56	0.65	0.74	0.82	0.91	1.00	1.09	1.18	1.28	1.38	2.74

* Depending on how the operator uses the cordless screwdriver, the tolerance could be up to +/-20 percent.

**Due to the Lithium-Ion battery, the device can only ship via ground.

SCREWFOX screwdriver tools

Tool bits for the cordless screwdriver and bit handle

The hardened bits are suitable for hard and soft screws.
Optimum edge geometries increase the bearing surface and prevent the screws from being over-tightened.



	Description	Order No.		Description	Order No.
	SF-UBH	1212590			
			Size: 0.45 x 2.4 x 70 mm	SF-BIT-SL 0,45X2,4-70	1212607
			Size: 0.5 x 3.0 x 50 mm	SF-BIT-SL 0,5X3,0-50	1212566
			Size: 0.5 x 3.0 x 70 mm	SF-BIT-SL 0,5X3,0-70	1212567
			Size: 0.6 x 3.5 x 50 mm	SF-BIT-SL 0,6X3,5-50	1212568
			Size: 0.6 x 3.5 x 70 mm	SF-BIT-SL 0,6X3,5-70	1212569
			Size: 0.8 x 4.0 x 50 mm	SF-BIT-SL 0,8X4,0-50	1212571
			Size: 0.8 x 4.0 x 70 mm	SF-BIT-SL 0,8X4,0-70	1212572
			Size: 1.0 x 4.0 x 70 mm	SF-BIT-SL 1,0X4,0-70	1212754
			Size: 1.0 x 5.5 x 50 mm	SF-BIT-SL 1,0X5,5-50	1212574
			Size: 1.0 x 5.5 x 70 mm	SF-BIT-SL 1,0X5,5-70	1212575
			Size: 1.2 x 6.5 x 70 mm	SF-BIT-SL 1,2X6,5-70	1212577



	Description	Order No.	Description	Order No.	Description	Order No.
Size: 0.6 x 3.5 x 50 mm for test sockets	SF-BIT-SLS 0,6X3,5-50	1212605				
Size: 0.9 x 6.5 x 50 mm for test sockets	SF-BIT-SLS 0,9X6,5-50	1212606				
Size: PH/PZ 1 x 50 mm			SF-BIT-PH 1-50	1212579	SF-BIT-PZ 1-50	1212591
Size: PH/PZ 2 x 50 mm			SF-BIT-PH 2-50	1212580	SF-BIT-PZ 2-50	1212592
Size: PH/PZ 3 x 50 mm			SF-BIT-PH 3-50	1212581	SF-BIT-PZ 3-50	1212593
Size: PH/PZ 1 x 70 mm			SF-BIT-PH 1-70	1212582	SF-BIT-PZ 1-70	1212594
Size: PH/PZ 2 x 70 mm			SF-BIT-PH 2-70	1212583	SF-BIT-PZ 2-70	1212595
Size: PH/PZ 3 x 70 mm			SF-BIT-PH 3-70	1212584	SF-BIT-PZ 3-70	1212596

Plus/minus bits, profile combination of slotted head and crosshead for screw connections on fuse boxes, relays, switching devices, etc.



	Description	Order No.	Description	Order No.		
Size: 1 x 70 mm	SF-BIT-PHSL 1-70	1212479	SF-BIT-PZSL 1-70	1212603		
Size: 2 x 70 mm	SF-BIT-PHSL 2-70	1212601	SF-BIT-PZSL 2-70	1212604		



	Description	Order No.	Description	Order No.		Description	Order No.
Size: 2 x 50 mm			SF-BIT-HEX 2-50	1212645	Size: 2 x 89 mm	SF-BIT-HEX 2-89 S	1200300
Size: 2.5 x 50 mm			SF-BIT-HEX 2,5-50	1212646	Size: 2.5 x 89 mm	SF-BIT-HEX 2,5-89 S	1200301
Size: 3 x 50 mm			SF-BIT-HEX 3-50	1212647	Size: 4 x 89 mm	SF-BIT-HEX 4-89 S	1200302
Size: 4 x 50 mm			SF-BIT-HEX 4-50	1212648	Size: 5 x 50 mm	SF-BIT-HEX 5-89 S	1200303
Size: 5 x 50 mm			SF-BIT-HEX 5-50	1212649		SF-BIT-HEXB 5-89 S	1208911
Size: 6 x 50 mm			SF-BIT-HEX 6-50	1212650			
Size: 8 x 50 mm	SF-BIT-TX 8-50	1212570	SF-BIT-HEX 8-50	1212651			
Size: 10 x 50 mm	SF-BIT-TX 10-50	1212573					
Size: 15 x 50 mm	SF-BIT-TX 15-50	1212576					
Size: 20 x 50 mm	SF-BIT-TX 20-50	1212578					
Size: 25 x 50 mm	SF-BIT-TX 25-50	1212585					
Size: 30 x 50 mm	SF-BIT-TX 30-50	1212586					
Size: 40 x 50 mm	SF-BIT-TX 40-50	1200161					

SCREWFOX screwdriver tools

Screwdriver and bit sets

					
Description	Order No.	Description	Order No.	Description	Order No.
Screwdriver set , slotted/crosshead Phillips Recess*, 6-piece, incl. rack, contents: 0.5 x 3.0 x 80; 0.8 x 4.0 x 100; 1.0 x 5.5 x 150; 1.2 x 6.5 x 150, PH 1, PH 2		Bit set , with SF-UBH universal bit holder 25 mm long slotted/crosshead (PZ and PH) bits, 10-piece		Bit screwdriver set with quick-action chuck , 89 mm long slotted/crosshead (PZ and PH)/hex/Torx* bits, 17-piece, in folding belt pouch, contents: PH 1,2,3 x 89; PZ 1,2,3 x 89; SL 1.5 x 5.5 x 89; TX 10-30 x 89; SW 3,4,5,6 x 89	
SF-SL/PH SET	1212541	SF-BIT SET	1212545	SF-M SET	1212543
Screwdriver set , slotted/crosshead Pozidriv*, 6-piece, incl. rack, contents: 0.5 x 3.0 x 80; 0.8 x 4.0 x 100; 1.0 x 5.5 x 150; 1.2 x 6.5 x 150, PZ 1, PZ 2		Cordless screwdriver bit set , 1 nut each in 5.5 mm, 8 mm, 13 mm, adapter to quarter inch.		Bit screwdriver set with quick-action chuck , 89 mm long slotted/crosshead (PH)/hex/Torx* bits, 17-piece, in folding belt pouch, contents: PH 1, 2, 3 x 89, SL 4 x 2.5, 6 x 3.5, 8 x 3.5, 1.0 x 5.5, 1.2 x 6.5, TX 10 - 25 x 89, SW 3,4,5 x 89	
SF-SL/PZ SET	1212542	ASD BIT SET HN	1209952	SF-M SET 2	1212756
Screwdriver set , slotted/crosshead Pozidriv* VDE-insulated, 6-piece, incl. rack, contents: 0.4 x 2.5 x 80; 0.6 x 3.5 x 100; 0.8 x 4.0 x 100; 1.0 x 5.5 x 125; PZ 1, PZ 2					
SF-SL/PZ SET VDE	1212540				
Screwdriver set , slotted/crosshead Phillips Recess*, VDE-insulated, 6-piece, incl. rack, contents: 0.4 x 2.5 x 80; 0.6 x 3.5 x 100; 0.8 x 4.0 x 100; 1.0 x 5.5 x 125; PH 1, PH 2					
SF-SL/PH SET VDE	1212539				
Screwdriver set with protective insulation integrated in the shaft, slotted/crosshead Phillips/combined profile, Pozidriv* + slotted (plus/minus), VDE-insulated, 7-piece, incl. rack, contents: 0.6 x 3.5 x 100; 0.8 x 4.0 x 100; 1.0 x 5.5 x 125; PH1 x 80; PH2 x 100; PZ1 x 80; PZ2 x 100					
SF-SL/PH/PZ-SL SET S-VDE	1212701				
Screwdriver set , Torx* with drill bit, 6-piece, incl. rack, contents: TX 8 x 60; TX 10 x 80; TX 15 x 80; TX 20 x 100; TX 25 x 100; TX 30 x 115					
SF-THX SET	1212538				
Screwdriver set , Torx*, VDE-insulated, 6-piece, incl. rack, contents: TX 8 x 80; TX 10 x 80; TX 15 x 80; TX 20 x 80; TX 25 x 100; TX 30 x 100					
SF-TX SET VDE	1212537				

Control cabinet keys

Universal control cabinet key with four closures: 6 mm square, 7 - 8 mm square, 7 - 8 mm triangle, 3 - 5 mm two-way key bit



Description **Order No.** **USS 4** **1203149**

Universal control cabinet key with strong chain and snap hook for nine closures: 5, 6, 7 - 8, 9 - 10 mm square, 7, 8 - 9, 10 - 11 mm triangle, 3 - 5 mm two-way key bit, 6 mm semicircle



Description **Order No.** **SF-CCK 9** **1212525**

Socket sets

The set includes: 1/4 inch socket set, 47-piece, 1/4 inch reversible ratchet, 48 teeth with fast-locking system, 50 mm and 100 mm 1/4 inch extensions, 1/4 inch screwdriver handle, 150 mm 1/4 inch flexible extension, 1/4 inch Cardan joint, 1/4 inch T-handle, 2 x 1/4 inch bit adapter, 13 knurled 1/4 inch sockets, wrench size: 4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm, 21 knurled socket bits: 6 x Torx® T10, T15, T20, T25, T30, T40, 6 x Hex 3, 4, 5, 6, 7, 8 mm, 3 x Phillips recess® PH1, PH2, PH3, 3 x Pozidriv® PZ1, PZ2, PZ3, 3 x slotted 4, 5.5, 7 mm, Allen wrench Hex 1.27, 1.5, 2, 2.5 mm.



Description **Order No.** **SF-SOCKET SET 47** **1200292**

Tooling accessories



Description **Order No.**
Measuring tape 5M Inch/Metric **1200304**

MICROFOX


Electronic pliers

The MICROFOX range of small pliers for electronics and electromechanical engineering tasks is ideal for working on hard-to-access areas such as PCB components. The micro-pliers have specially shaped two-component handles ensuring a secure grip that makes for easy work. To protect sensitive electronic components, the ESD version has special handles that discharge electrostatic charges in a controlled manner in accordance with applicable standards and regulations.

Precise and convenient

Sophisticated tools for precise tasks in the field of electronics.

- ✓ Protect electronic components with the ESD design
- ✓ Ultra-precise: low tolerances during production
- ✓ Durable, high-quality components and raw materials

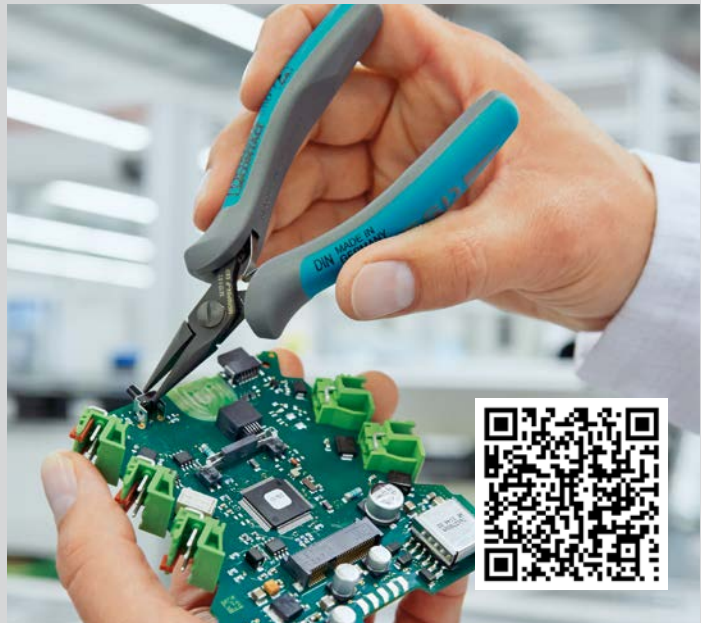


Durable

The tools are made from a special C 60 tool steel. They are hardened and precision-ground for superior cutting performance and are particularly durable.



Precision

The integrated double-leaf spring and the ergonomic nonslip handles ensure accuracy and precision when working with electronic components.

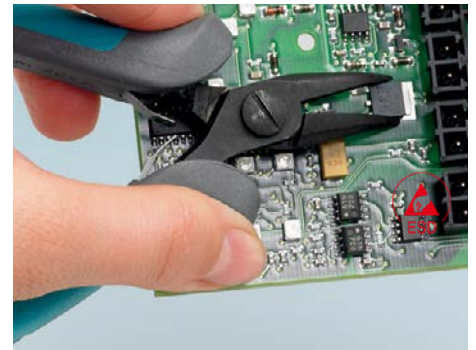

Protection

The handles of the MICROFOX ESD electronics pliers are made of conductive plastic. This means that electrostatic energy is discharged in a gradual and controlled manner.

MICROFOX electronics pliers

Electronics pliers

MICROFOX electronics pliers feature a through-connected joint for permanent stability and optimum distribution of force. The surfaces are finely polished and oiled.



	Order No.	MICROFOX-SB 1212489	MICROFOX-E 1212494	MICROFOX-P 1212491
Description		Diagonal cutter Rounded head with chamfer	Front cutter No chamfer	Needle-nose pliers Smooth gripping surface



	Order No.	MICROFOX-SP 1212488	MICROFOX-SP-1 1212487	MICROFOX-EO 1212495
Description		Diagonal cutter, angled Tapered head without chamfer	Diagonal cutter Tapered head without chamfer	Front cutter 20° angle, no chamfer



	Order No.	MICROFOX-PC 1212492	MICROFOX-F 1212493	MICROFOX-R 1212490
Description		Needle-nose pliers 45° angle, smooth gripping surface	Flat-nose pliers Smooth gripping surface	Round-nose pliers Smooth gripping surface

ESD electronics pliers

The MICROFOX ESD electronics pliers conform to applicable standards and regulations including DIN EN 61340-5. The screwed precision joint ensures optimum results. The metal surfaces are mirror-polished and then phosphate-treated to ensure that there is no glare when working.



	Order No.	MICROFOX-S ESD 1212480	MICROFOX-E ESD 1212485	MICROFOX-P ESD 1212482
Description		Diagonal cutter Rounded head, no chamfer	Front cutter No chamfer	Needle-nose pliers Smooth gripping surface




	Order No.	MICROFOX-PC ESD 1212483	MICROFOX-F ESD 1212484	MICROFOX-R ESD 1212481
Description		Needle-nose pliers Smooth gripping surface. 45° angle	Flat-nose pliers Smooth gripping surface	Round-nose pliers Smooth gripping surface

Efficient wire preparation and wiring

The use of worker assistance systems increases productivity, improves process reliability, and guarantees smooth production. With the clipx WIRE assist, Phoenix Contact offers a software-aided “tool” for efficient wire preparation and wiring.

The software controls the devices and guides the worker during wire preparation, reducing the potential errors of manual steps, therefore increasing the process reliability in wire preparation.

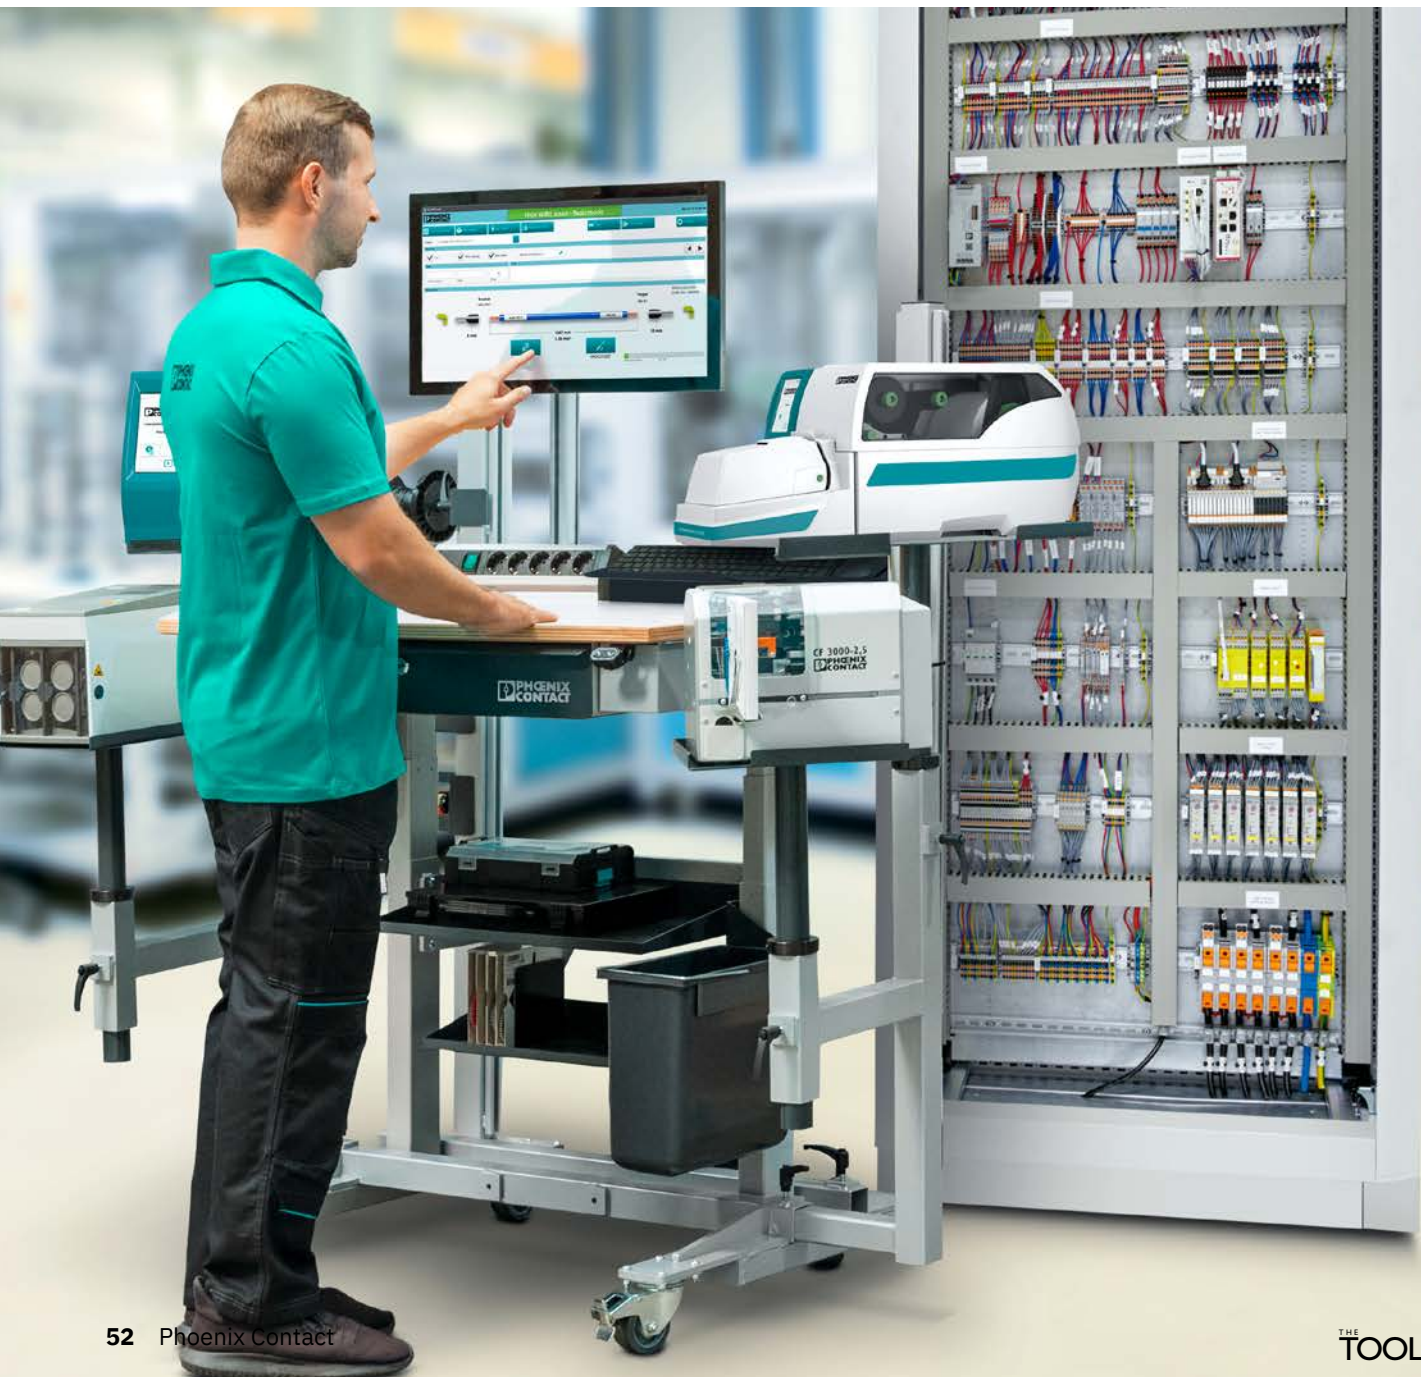

Ergonomic and intuitive wire preparation

Customized clipx WIRE assist

Information for processing and wiring is visually displayed on the monitor in an easy-to-follow format.

Semi-automatic tools such as the CF3000 and E.FOX S 10, in addition to the THERMOMARK E SERIES printing system, ensure process-reliable and efficient wire processing.

A wide range of wires can be stocked and fed directly to the CUTFOX 10 cutting machine. Wires can be changed quickly with just a few steps.

Equipped with special swivel/brake casters, the clipx WIRE assist can be used wherever the need arises. This reduces unnecessary movements and saves time.

The flexible positioning of the devices provides the worker with an ergonomic, low-fatigue, comfortable workstation.

Height-adjustable workbench allows for sitting or standing working positions.



clipx WIRE assist

Description	Article	Order #
Basic workbench	AS-WORKBENCH-F 90 US MA	1194550
Display mount for workbench	AS-WB-F/MOUNT DISPLAY A1	1193695
Stand with mounting rails	AS-WB-F/STAND 1350	1193700
Angle for equipment arm	AS-WB-F/ARM-L 380x500	1193701
Equipment arm left side for basic workbench	AS-WB-F/ARM-L 700x500	1193703
Equipment arm right side for basic workbench	AS-WB-F/ARM-R 700x500	1193766
Holder for automatic cutting, stripping, crimping device	AS-WB-F/HOLDER 208x295	1193767
PC mount for workbench	AS-WB-F/MOUNT PC 230x190	1193768
Small shelf	AS-WB-F/SHELF 135x190	1193769
Small shelf	AS-WB-F/SHELF 515x215	1193786
Large shelf	AS-WB-F/SHELF 515x350	1193787
Five-socket power strip with switch	AS-WB-F/POWER STRIP 5 US	1194556
LED table light with swinging arm	AS-WB-F/LAMP	1197098
Wire guide	AS-WB-F/W-MANAGER A2 16	1193835
Device holder	AS-WB-F/HOLDER W-RING-L 425X370	1193835
Bin with holder	AS-WB-F/HOLDER BIN	1193801
Machine holder	AS-WB-F/HOLDER D80	1193827
Holder for THERMOMARK	AS-WB-F/HOLDER 275x425	1194580
Cable reel holder	AS-WB-F/HOLDER W-REEL 240	1193833
Printer shelf on stand	AS-WB-F/SHELF 290x370	1193839
Wire manager on device holder	AS-WB-F/W-MANAGER A1 16	1193837
Keyboard shelf	AS-WB-F/SHELF KEYBOARD	1193830
Shadowboard	AS-WB-F/T-BOARD A1 210x300	1194547
Shadowboard	AS-WB-F/T-BOARD A3 210x300	1194542
Shadowboard	AS-WB-F/T-BOARD A5 210x300	1194537
Holder for THERMOMARK E.	AS-WB-F/HOLDER 270X420	1365638
Box holder including one yellow box	AS-WB-F/HOLDER S-BOX A1	1365640
Dongle	WIREASSIST SW1.x DONGLE	1197102

Customizable and portable

- Height-adjustable workbench with ideal positioning of automatic tools and marking devices enables optimal ergonomics, implementing the 5S principle and reducing time spent searching for the right tool
- With steerable casters and its compact shape, the clipx WIRE assist can be moved quickly and easily, increasing efficiency and reducing workstation set-up time when changing work locations

For further information on clipx WIRE assist, simply scan the QR code.



Cutting, stripping, and crimping devices

Semi-automatic wire processing

Phoenix Contact's comprehensive range of innovative semi-automatic wire-processing machines enables the flexible and fast processing of wires and cables. A combination of functionality, quality, and fast setup guarantees high levels of flexibility while ensuring consistent quality. The line includes devices for wire cutting, wire stripping, and connector crimping. The ferrule crimping machines provide UL approval with Phoenix Contact ferrules.



Automatic wire cutting
Reference page 55



Automatic wire stripping
Reference page 55



Automatic wire stripping and crimping
Reference page 56



Automatic wire crimping
Reference page 57

Automatic devices

CUTFOX 10 wire cutting machine

The CUTFOX 10 cutting machine cuts a variety of wires and cables up to 8 AWG. Solid and stranded conductors can be cut to length with measured precision. The length and number of cuts are entered via the user-friendly display. The CUTFOX 10 automatically adapts to the diameter when there is a change in material. Simply open the front cover to insert the wire, close the cover, and it is ready to go.



Description	Order No.	Pieces
BS-WIRE BRAKE-S	1642850	1 piece
BS-WIRE BRAKE-6 SET	1645918	6 pieces



CUTFOX 10

Description	Order No.
Cutting machine, 120 V, 50 - 60 Hz version	CUTFOX 10 1206829
Technical data	
Stranded/Solid wire [AWG]	0.25-10 / 22-8 AWG / 0.25-2.5 / 22-14 AWG
Max number of cuts / max length [pcs.]	999 pcs / up to 100 M
Accessories	
Replacement drive wheels 2 pcs., for CUTFOX 10	CF-10 WHEEL SET 1207271
Replacement blade set for CUTFOX 10	CF-10 CUTTER KNIFE SET 1207284

E.FOX S 10 and the WF1000 wire stripping machines

The new E.FOX S 10 is an electric-powered stripping device for the efficient processing of conductors operated via a touch display. The adjustment to the desired cross-section and full or partial stripping length is completed quickly and precisely via motorized drives. Barcodes can be created to store favorites for quick and easy recall using a barcode scanner. The new stripping machine can also be integrated into worker assistance systems, such as the clipx WIRE assist, and controlled through a software program.

The compact WF 1000 is a manual-driven stripping device suitable for automatically processing full or partial strip wires. It is suitable for special types of insulation, such as PTFE and silicone, as the clamping force automatically adjusts itself to the required extraction force, preventing pressure points on the sensitive materials. The large, clear, integrated graphic display on top of the device makes it easy to manually select the right settings via individual knobs.



E.FOX S 10

Description	Order No.
Electric driven stripping machine 120 V version	E.FOX S 10 1554298
Technical data	
Stranded wire [mm]	28-8 AWG
Full strip / Partial strip length [mm]	2 - 20
Accessories	
Standard V-Shaped replacement stripping blade	E.FOX S 10/S 1457330
Flat replacement stripping blade for ribbon cable	E.FOX S 10/SB-F 1554155

WF 1000

Description	Order No.
Stripping machine, 120 V version	WF 1000 120 V 1212258
Technical data	
Stranded wire [mm²]	28-10 AWG
Full strip / Partial strip length [mm]	3 - 20 / 2 - 20
Replacement stripping blade	WF 1000/SB 1212279

Automatic devices

CF 3000 wire stripping and crimping device

The CF3000 wire stripping and crimping device processes taped ferrules with insulating collars from 22-14 AWG and an 8 mm strip length. The wire is stripped and then fitted with a ferrule in a single step.


The automatic device is lightweight and compact, quickly adaptable to the desired wire gauge in under a minute, and carries UL with Phoenix Contact ferrules.



CF 3000

Description	Order No.	
Stripping and crimping device, 120 V version	CF 3000-2,5 120V	1205516
Taped ferrules, 22-14 AWG, stripping length: 8 mm		
Includes conversion kits for 20-14 AWG		
Technical data		
Conductor [mm²] / AWG	0.25 – 2.5 / 22 – 14	
Crimp profile	Trapezoidal	
Accessories		
Conversion kit for 22 AWG, 8 mm strip length	CF 3000-TOOLKIT 0,25	1212376
Replacement locator		
0.25/0.34 mm², 22 AWG	CF 3000 LOC 0,25	1212377
0.5 mm², 20 AWG	CF 3000 LOC 0,5	1205639
0.75 mm², 18 AWG	CF 3000 LOC 0,75	1205642
1.0 mm², 18 AWG	CF 3000 LOC 1,0	1205655
1.5 mm², 16 AWG	CF 3000 LOC 1,5	1205668
2.5 mm², 14 AWG	CF 3000 LOC 2,5	1205671
Replacement blade		
0.25 mm², 22 AWG - adjustable	CF 3000 AB 0,25	1212380
0.5 mm², 20 AWG - adjustable	CF 3000 AB 0,5	1207886
0.75 mm², 18 AWG - adjustable	CF 3000 AB 0,75	1207899
1.0 mm², 18 AWG - adjustable	CF 3000 AB 1,0	1207909
1.5 mm², 16 AWG - adjustable	CF 3000 AB 1,5	1207912
2.5 mm², 14 AWG - adjustable	CF 3000 AB 2,5	1207925
0.5 mm², 20 AWG	CF 3000 AM 0,5	1205587
0.75 mm², 18 AWG	CF 3000 AM 0,75	1205590
1.0 mm², 18 AWG	CF 3000 AM 1,0	1205600
1.5 mm², 16 AWG	CF 3000 AM 1,5	1205613
2.5 mm², 14 AWG	CF 3000 AM 2,5	1205626

Taped ferrules



Cross-section					Ordering data				Cross-section					Ordering data			
mm²	AWG	Color	Opening	End opening	Type	Order No.	Pcs./Pxt.		mm²	AWG	Color	Opening	End opening	Type	Order No.	Pcs./Pxt.	
0.25	24	yellow	2.00	0.80	AI 0,25-8 YE-B	3240251	1000		0.75	18	blue	2.80	1.30	AI 0,75-8 BU-B	3201547	1000	
0.25	24	blue	2.00	0.80	AI 0,25-8 BU-B	3240250	1000		1	18	yellow	3.00	1.50	AI 1-8 YE-B	3201589	1000	
0.34	22	turquoise	2.00	0.80	AI 0,34-8 TQ-B	3240249	1000		1	18	red	3.00	1.50	AI 1-8 RD-B	3201385	1000	
0.5	20	white	2.50	1.10	AI 0,5-8 WH-B	3201369	1000		1	18	red	3.00	1.50	AI 1-8 RD-B 3000	3240665	3000	
0.5	20	white	2.50	1.10	AI 0,5-8 WH-B 3000	3240663	3000		1.5	16	red	3.40	1.80	AI 1,5-8 RD-B	3201592	1000	
0.5	20	orange	2.50	1.10	AI 0,5-8 OG-B	3201563	1000		1.5	16	black	3.40	1.80	AI 1,5-8 BK-B	3201398	1000	
0.75	18	white	2.80	1.30	AI 0,75-8 WH-B	3201576	1000		1.5	16	black	3.40	1.80	AI 1,5-8 BK-B 2500	3240666	2500	
0.75	18	white	2.80	1.30	AI 0,75-8 WH-B 3000	3240677	3000		2.5	14	gray	4.20	2.30	AI 2,5-8 GY-B	3201550	1000	
0.75	18	gray	2.80	1.30	AI 0,75-8 GY-B	3201372	1000		2.5	14	blue	4.20	2.30	AI 2,5-8 BU-B	3201408	1000	
0.75	18	gray	2.80	1.30	AI 0,75-8 GY-B 3000	3240664	3000		2.5	14	blue	4.20	2.30	AI 2,5-8 BU-B 1500	3240667	1500	

Automatic devices

CF 1000 crimping device

The CF1000 stripping and crimping device can be used to process loose ferrules with insulating collars. Up to 1200 conductors can be processed in an hour using this device. The conductor is stripped and crimped with a ferrule to a high standard of quality in a single step. The unit is suitable for bulk processing with quick change of cross-section without the need for additional adjustments. The unit is capable of various strip lengths and the option of stripping only. There are two different units, the CF1000-1,5 for 22-12 AWG, and the CF1000-10 for 12, 10, and 8 AWG.



CF 1000

Description	Order No.	
Stripping and crimping device	CF 1000-1,5	1208199
Electro-pneumatic, for loose ferrules with insulating collar	22-12 AWG	
Includes conversion kits for 20-16 AWG		
Stripping and crimping device	CF 1000-10	1212456
Electro-pneumatic, for loose ferrules with insulating collar	12, 10, 8 AWG	
Conversion kits not included		
Accessories		
Extension kit , for CF 1000-1,5, up to serial #160594		
22 AWG, stripping length: 6 mm	CF 1000-TOOLKIT 0,34/6	1208212
22 AWG, stripping length: 8 mm	CF 1000-TOOLKIT 0,34/8	1208225
14 AWG, stripping length: 8 mm	CF 1000-TOOLKIT 2,5/8	1208241
Extension kit , for CF 1000-1,5, from serial number 160595		
22 AWG, stripping length: 6-8 mm	CF1000-TOOLKIT 0.34/6-8	1208226
14 AWG, stripping length: 6-12 mm	CF1000-TOOLKIT 2,5/6-12	1208242
12 AWG, stripping length: 10 mm	CF1000-TOOLKIT 4,0/10	1208271
Crimping jaws , for square crimp profile		
20-18 (0.75 mm ²) AWG, stripping length: 6-12 mm	CF 1000 PBSQ 0,75	1212912
18 (1.0 mm ²) - 16 AWG, stripping length: 6-12 mm	CF1000 PBSQ 1,5	1212913
14 AWG, stripping length: 6-12 mm	CF1000 PBSQ 2,5	1212914
Extension kit , for CF 1000-10, for loose ferrules with insulating collar		
12 AWG, stripping length: 10 - 12 mm	CF 1000-10-TOOLKIT 4/10-12	1212458
10 AWG, stripping length: 12 mm	CF 1000-10-TOOLKIT 6/12	1212459
8 AWG, stripping length: 12 mm	CF 1000-10-TOOLKIT 10/12	1212460
Protective feeding bowl cover	CF 1000-COVER	1208306

Automatic devices

CF 500 crimping device

The compact CF 500 crimping device is characterized by its high press capacity and the ease with which dies can be changed. With the large number of dies available, this device is an optimal solution for crimping.

- Ferrules up to 1/0 AWG
- TWIN ferrules up to 2 x 8 AWG
- Insulated cable lugs up to 10 AWG
- Uninsulated cable lugs up to 10 AWG
- Tubular cable lugs up to 8 AWG
- Slip-on sleeves and slip-on blade connectors up to 10 AWG
- Turned contacts up to 8 AWG
- Solar contacts 14, 12, and 10 AWG

* Dies, locators, and protective covers sold separately.



CF 500			
Description	Description	AWG	Order No.
Crimping device, 120 V version, with foot switch (dies, locators, and covers not included)	CF 500-120 V		1208351
Accessories			
CF 500 die for			
Ferrules (A ... and AI ...) 0.25 - 6 mm ²	CF 500/DIE AI 6	22-10	1212238
Ferrules (A ... and AI ...) 10, 16, and 25 mm ²	CF 500/DIE AI 25	8, 6, 4	1212239
Ferrules (A ... and AI ...) 35 and 50 mm ²	CF 500/DIE AI 50	2 and 1/0	1212261
TWIN ferrules (A-TWIN...) 2 x 4, 2 x 6, and 2 x 10 mm ²	CF 500/DIE AI-TWIN 10	2 x 12, 2 x 10, 2 x 8	1212262
TWIN ferrules (AI-TWIN...) 2 x 6, 2 x 10, 2 x 16 mm ²	CF 500/DIE AI-TWIN 16	10, 8, 6	1200299
Insulated cable lugs (RCI ... and FCI ...) 0.14 - 1.5 mm ²	CF 500/DIE RCI 1,5	24-16	1212263
Insulated cable lugs (RCI ... and FCI ...) 0.5 - 6 mm ²	CF 500/DIE RCI 6	20-10	1212240
Insulated cable lugs (RCI ... and FCI ...) 0.5 - 6 mm ²	CF 500/DIE RCI 6-1	20-10	1212691
Uninsulated Cable lugs (RC ... and FC ...) 0.5 - 10 mm ²	CF 500/DIE RC 10	20-8	1212244
Uninsulated Cable lugs (RC ... and FC ...) 16 mm ²	CF 500/DIE RC 16	6	1212257
Tube lugs (RCT ...) 0.1 - 4 mm ²	CF 500/DIE RCT 4	26, 18, 16, 14, 12	1212243
Tube lugs (RCT ...) 4, 6, 10 mm ²	CF 500/DIE RCT 10-1	12, 10, 8	1212245
Tube lugs (RCT ...) 4, 6, 10 mm ²	CF 500/DIE RCT 10-2	12, 10, 8	1212246
Tube lugs (RCT ...) 4, 6, 10 mm ²	CF 500/DIE RCT 10-3	12, 10, 8	1212256
Slip-on sleeves and slip-on blade connectors (SCF ... and SCM ...) 0.1 - 1.5 mm ²	CF 500/DIE SC 1,5	28-16	1212241
Slip-on sleeves and slip-on blade connectors (SCF ... and SCM ...) 0.5 - 6 mm ²	CF 500/DIE SC 6	20-10	1212242
Turned contacts with pin diameters of 2.5 and 4.0 mm (CK 2,5 ... and CK 4,0) 0.14 - 4 mm ²	CF 500/DIE TC HC 4	24-12	1324132
Turned contacts (CK 4,0) 6 - 10 mm ²	CF 500/DIE TC HC 10	10-8	1324137
Solar contacts, 2.5 mm ² , 4 mm ² , 6 mm ²	CF 500/DIE SR 6-2	14, 12, 10	1212692
Assembling FBS... jumpers	CF 500/DIE FBS		1212461
CF 500 locator (positioning tool) for			
Slip-on sleeves (SCF...) W: 2.8 mm, L: 5 mm	CF 500/LOC SCF 2,8/1,5		1212249
Slip-on sleeves (SCF...) W: 4.8 mm	CF 500/LOC SCF 4,8/2,5		1212248
Slip-on sleeves (SCF...) W: 0.5 - 2.5 mm ²	CF 500/LOC SCF 6,3/2,5		1212264
Slip-on sleeves (SCF...) W: 6.3 mm	CF 500/LOC SCF 6,3/6		1212247
Slip-on blade (SCM ...) 1.5 - 6 mm	CF 500/LOC SCM 6,3/6		1212265
CF 500 protective cover for			
Ferrules up to 6 mm ² (AI 6...)	CF 500/COV AI 6		1212254
TWIN ferrules (AI-TWIN...)	CF 500/COV AI-TWIN		1212266
Insulated cable lugs (RCI...)	CF 500/COV RCI		1212255
Tubular cable lugs 0.5 - 10 mm ²	CF 500/COV RC 10		1212252
Tubular cable lugs 0.34 - 2.5 mm ²	CF 500/COV RCT 2,5		1212253
Slip-on sleeves and slip-on blade connectors SC 1,5... and SC 6...	CF 500/COV SC		1212251
For FBS jumpers	CF 500/COV FBS		1212462
Without recess (for all dies without classification)	CF 500/COV		1212250

Automatic devices

ZAP pneumatic crimping pliers

The ZAP crimping pliers are pneumatic pliers for ferrules from 24-8 AWG. The ZAPs have a Duo-Press die, allowing both front and side entry. The crimping process is activated by a manual trigger or a foot pedal, depending on which version is chosen. The T versions are designed to sit on a workbench and have two ferrule holding areas integrated into the design.



ZAP...



ZAP... T

ZAP 25 / ZAP 40 / ZAP 100

Manual trigger handles

Description		Order No.	Order No.	Order No.
Pneumatic crimping pliers		ZAP 251203110	ZAP 401212630	ZAP 1001203259
Technical data				
Conductor	[mm²] / AWG	0.25 – 2.5 / 24 – 14	0.25 – 4 / 24 – 12	4 – 10 / 12 – 8
Pressure range	[bar]	4 – 6	4 – 6	4 – 6
Air consumption per compression	[l]	0.2	0.2	0.2
Crimping		Trapezoidal	Trapezoidal	Trapezoidal

ZAP 25 T / ZAP 100 T

Foot pedal activated

Description		Order No.	Order No.
Pneumatic crimping pliers		ZAP 25 T1203123	ZAP 100 T1203262
Technical data			
Conductor	[mm²] / AWG	0.25 – 2.5 / 24 – 14	4 – 10 / 12 – 8
Pressure range	[bar]	4 – 6	4 – 6
Air consumption per compression	[l]	0.2	0.2
Crimping		Trapezoidal	Trapezoidal

American Wire Gauge to metric conversion chart

AWG/ kcmil	[mm²]	AWG/ kcmil	[mm²]	AWG/ kcmil	[mm²]
30	0.05	(15)	1.5	0	50
(29)		14	2.1	00	70
28	0.08	(13)	2.5	000	95
(27)		12	3.3	0000	120
26	0.12	(11)	4	250 kcmil	120
(25)	0.14	10	6	300 kcmil	150
24	0.22	(9)		350 kcmil	185
(23)	0.25	8	8.4	400 kcmil	
22	0.32	(7)	10	500 kcmil	240
(21)		6		600 kcmil	300
20	0.5	(5)	16		
(19)	0.75	4			
18	0.82	(3)	25		
(17)	1	2	35		
16	1.3	1			



Open communication with customers and partners worldwide

Phoenix Contact is a global market leader based in Germany. We are known for producing forward-thinking products and solutions for the comprehensive electrification, networking, and automation of all sectors of the economy and infrastructure. With a global network, we maintain close relationships with our customers, something we believe is essential for our common success.

You can find your local partner at
phoenixcontact.com

