



# MARKING system

Mobile printing systems

# Mark equipment wherever you want

## Mobile printing systems

A consistent industrial identification system involves a great deal of effort in extensive systems. With mobile printing systems, you can make tasks and work processes more independent and flexible. Print the required marking at your desk or right on site in your application. The THERMOMARK PRIME and the THERMOMARK GO SERIES systems allow you to realize a wide range of printing jobs very easily, tailored ideally to your requirements.



# Mobile marking systems for any requirement

## THERMOMARK PRIME

The THERMOMARK PRIME can be used wherever you need it – whether as a fixed desktop device or out and about in the field. The thermal transfer printer is ideally suited for mobile use with its integrated marking software, independent energy supply, and an intuitive user interface. It is also easy to operate via the PROJECT complete marking software, which allows unlimited design possibilities for your marking solutions.

For more information, see page 4 onwards.

**i** Web code: #1234



Compact card printer for flexible mobile or stationary use

## THERMOMARK GO

Create your labels easily and wherever you need them: Control the mobile label printer entirely from your smart device, and create markings in the industrial environment with full flexibility. With state-of-the-art interfaces, a host of applications, and automatic material detection, the printer creates high-quality marking solutions – easily and without errors. In addition to continuous media, the THERMOMARK GO also processes practical pre-punched marking materials for device, conductor, and cable marking. Along with the MARKING system app, the printer can also be fully controlled via the PROJECT complete marking software.

For more information, see page 8 onwards.

**i** Web code: #1234



App-driven label printer for use on site

## THERMOMARK GO.K

The THERMOMARK GO.K handheld printer is ideally suited for fast marking on site. The printer is robust, easy to use, and offers versatile functions. It can process continuous materials such as shrink sleeves, labels, and non-adhesive material. Direct data entry via the keypad is particularly easy, with a wide range of integrated templates. Moreover, the THERMOMARK GO.K can be controlled via the PROJECT complete marking software.

For more information, see page 12 onwards.

**i** Web code: #1234



Intuitive-to-operate handheld printer

# Versatile stand-alone printing system

## THERMOMARK PRIME

The locations of use and requirements for industrial identification are as numerous as they are varied: From centrally organized industry assemblies to technical supply units. The THERMOMARK PRIME thermal transfer printer covers this variety with its large range of marking materials in both card and sheet formats. With the integrated software and high-performance rechargeable battery, it can also be used for autonomous marking in the field, in addition to desktop operation.

### Your advantages


- ✓ Easy data entry thanks to the touchscreen and fully integrated marking software
- ✓ Easy energy management with replaceable high-performance rechargeable battery
- ✓ Versatile in application: Extensive material portfolio made up of countless products for terminal, conductor and cable, device, and plant marking



## PROJECT complete marking software

Create marking files easily and conveniently with PROJECT complete. The areas that can be labeled are indicated. A realistic representation of the finished printed label is provided on screen.

To ensure easy operation, the software accepts existing marking files for CAE systems, tables, and word processing programs. PROJECT complete controls all Phoenix Contact printing systems and standard office printers.

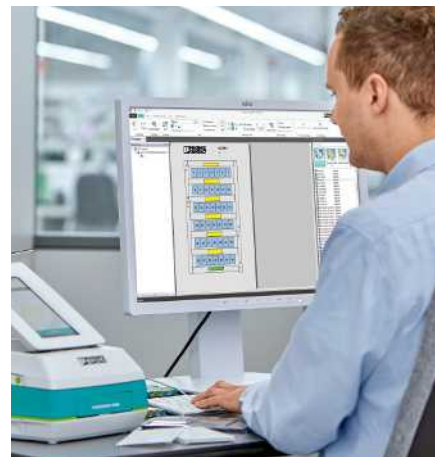

# All-rounder for efficient marking

## THERMOMARK PRIME

THERMOMARK PRIME is the unique combination of proven, reliable printing technology, a complete, integrated marking software suite, and a durable, independent energy supply. The touchscreen, capsule ink ribbons, and a replaceable battery simplify printer operation on site, directly where it is needed. The thermal transfer printer can also be operated conveniently as a desktop system via the PROJECT complete marking software.



# One printer for all fields of application



## Desktop interaction

The THERMOMARK PRIME can easily be managed in stationary use using a PC. Its wide variety of functions can be managed ideally via the PROJECT complete marking software.



## Marking in the control cabinet

The THERMOMARK PRIME prints marking materials for all components used in control cabinet manufacturing. The printing system resolves this task directly on site with integrated marking software and energy on board.



## On-the-go in industrial operation

Regardless of whether you are working with local installation sites or supply equipment – with a large selection of marking materials, the THERMOMARK PRIME offers the highest degree of flexibility for the widest range of applications.

## Printing directly on site

The mobile THERMOMARK PRIME thermal transfer printer allows you to create markings for terminal blocks, conductors, cables, devices and systems right where they will be used. It therefore saves you a great deal of time. The wide variety of different printing materials offers the correct marking for every component.


**Easy data entry**  
with fully integrated  
marking software

**Convenient  
operation**  
via an adjustable  
multi-touch display

**Flexible fields  
of application**  
with approximately  
700 different  
marking materials

**Ready to use  
right away**  
with an ink ribbon  
that can be  
replaced in less  
than 10 seconds

**100% independent**  
with replaceable  
high-performance  
rechargeable battery

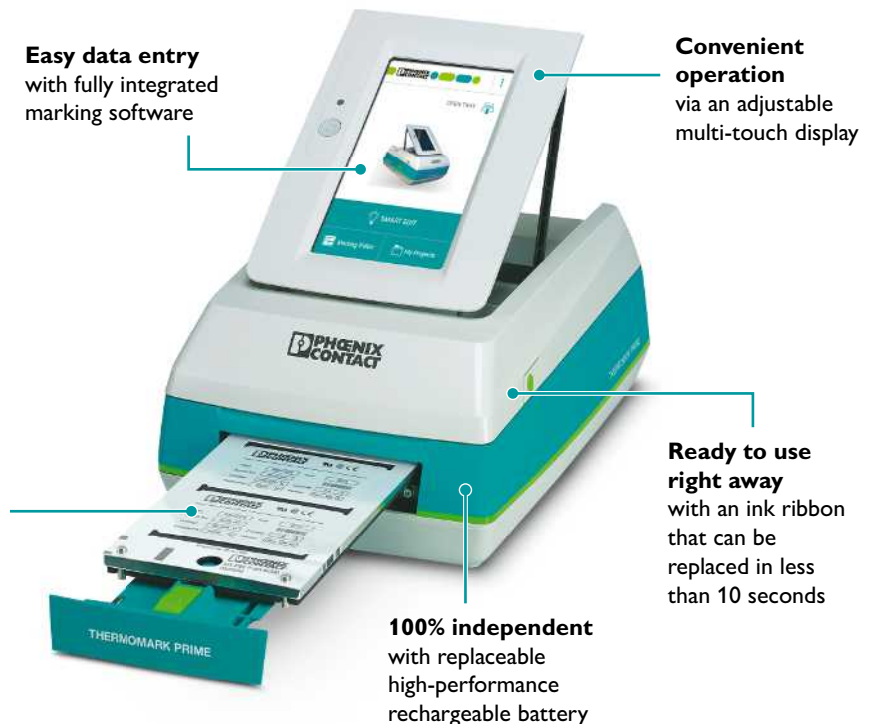

# Smart systems for maximum mobility

## THERMOMARK GO SERIES

Do you want to print directly and flexibly at the location of use? The mobile printing systems of the THERMOMARK GO SERIES make this possible. Control the mobile THERMOMARK GO label printer via your smart device, and create markings with flexibility in the industrial environment. The THERMOMARK GO.K handheld device features an intuitive keypad. With their compact dimensions and the practical accessories, all devices are ideal companions for any marking task. Both printing systems also feature a connection to the professional PROJECT complete marking software.

### Your advantages

- ✓ Compact devices with a robust design are ideal for use in industrial environments
- ✓ Marking made easy: Automatic material recognition prevents printing errors
- ✓ Maximum flexibility with a wide range of materials in different sizes and colors
- ✓ Uniform cartridge system: Consistent use of continuous media materials in all THERMOMARK GO SERIES devices



## MARKING system app: Design markings intuitively

The MARKING system app features a unique, mobile interface for the smart, networked selection and creation of marking files.

The app can also be used offline on mobile end devices and is available for iOS and Android operating systems. The app also allows the THERMOMARK GO printer to be operated from a smart device. The app features state-of-the-art connectivity and intuitive operation and is available in 19 languages.

Free download:

 Web code: #2414




# Professional marking on-site

## THERMOMARK GO

The THERMOMARK GO mobile label printer and the MARKING system app allow you to create labels for industrial identification directly on site. Simply design the markings on your smart device and send them to the printer.

The THERMOMARK GO also processes pre-punched labels in the same way as desktop printing systems. The innovative material design makes it possible for every label to be printed without material waste.

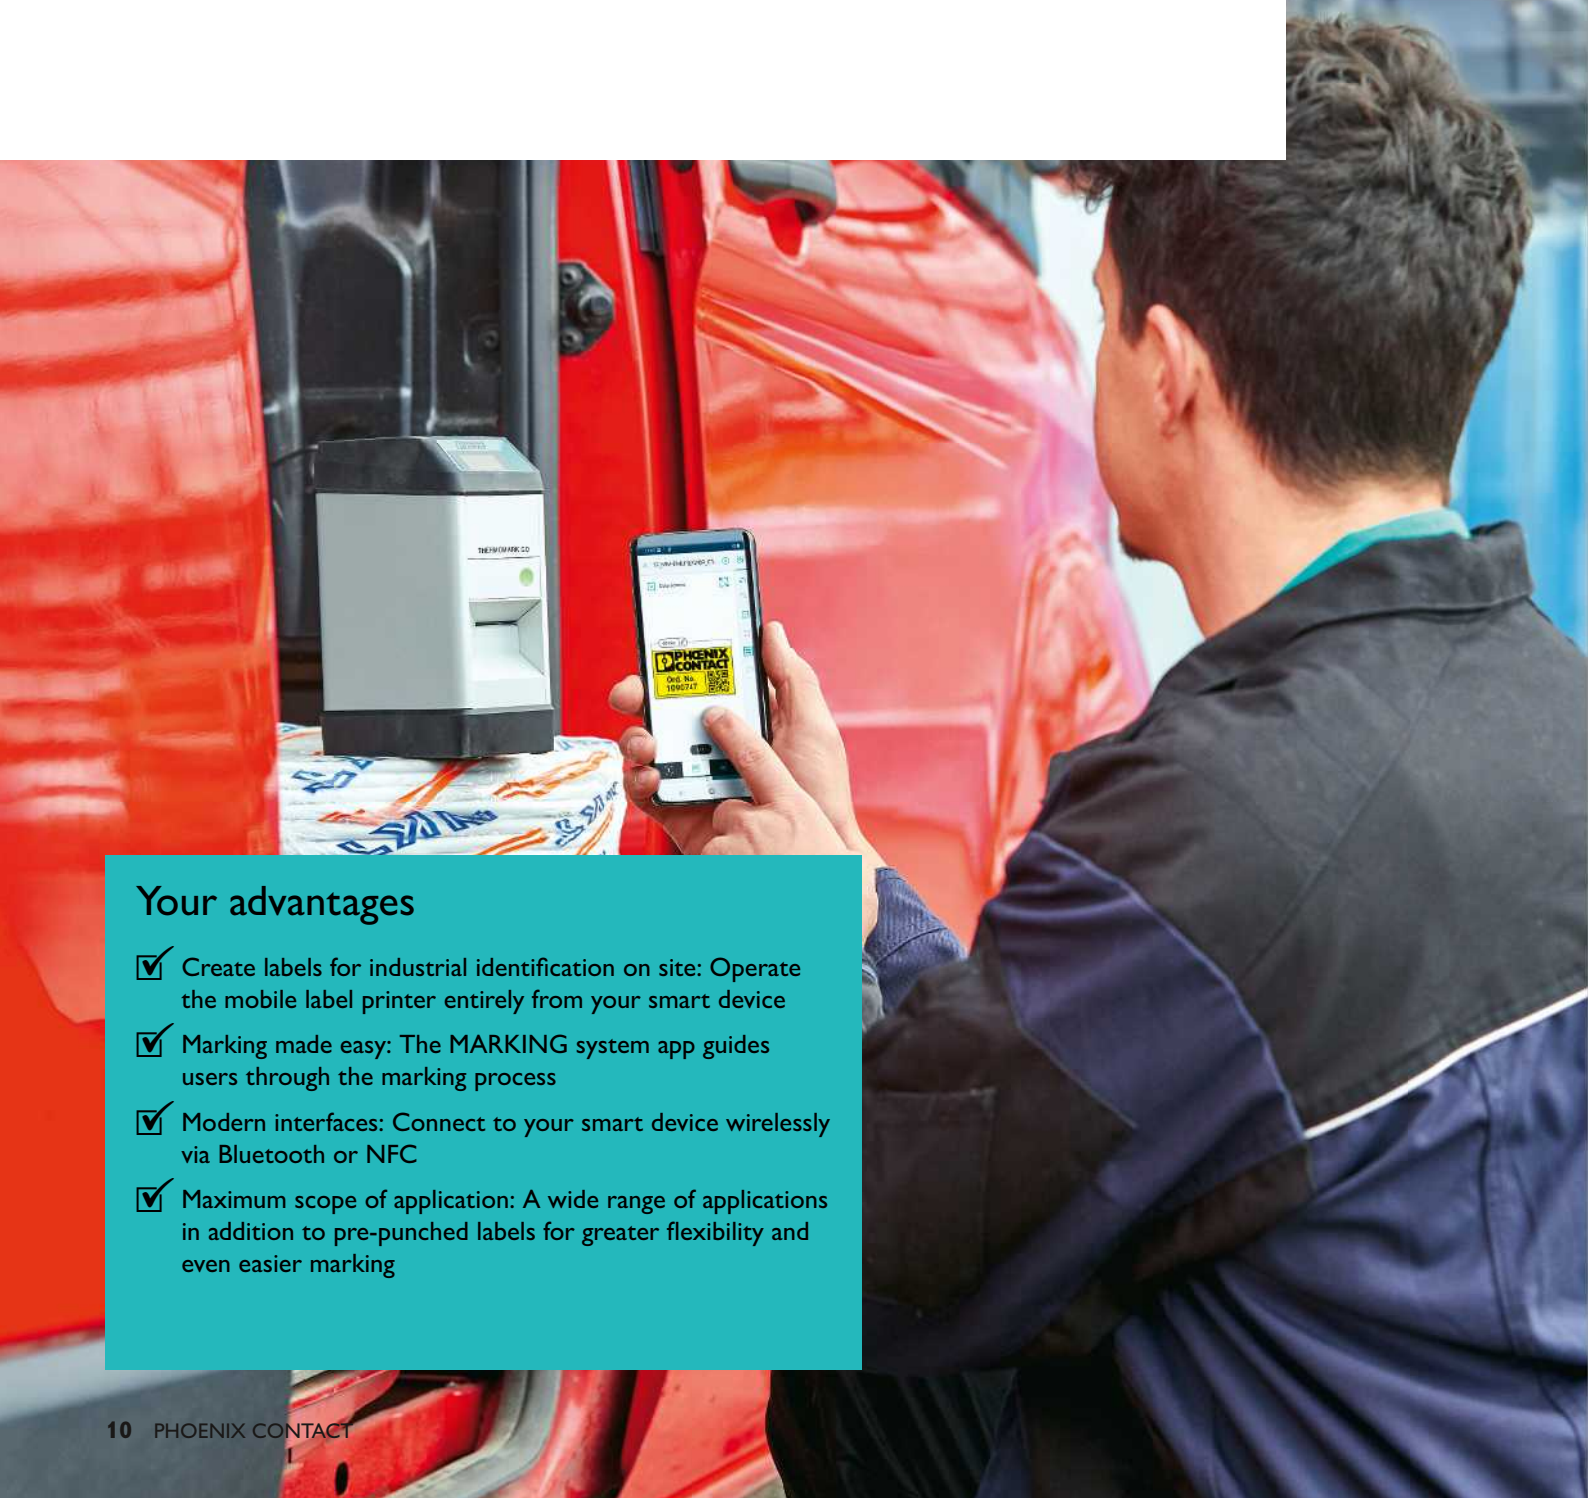

### Your advantages

- ✓ Create labels for industrial identification on site: Operate the mobile label printer entirely from your smart device
- ✓ Marking made easy: The MARKING system app guides users through the marking process
- ✓ Modern interfaces: Connect to your smart device wirelessly via Bluetooth or NFC
- ✓ Maximum scope of application: A wide range of applications in addition to pre-punched labels for greater flexibility and even easier marking

## My on-the-go printer



### Modern interfaces

Connect your smart device to the THERMOMARK GO via Bluetooth or use the NFC interface to directly and conveniently start the app. Your data is then transmitted securely and quickly to the printer via Bluetooth 5. Up to five users can simultaneously connect to the THERMOMARK GO.

### Intuitive label creation

The MARKING system app guides you through the entire printing process, supporting you in creating the perfect marking solution. By systematically requesting application parameters, the software identifies the ideal solution for your customized marking of terminal blocks, conductors, cables, devices, and systems.

### Easy transportation

Everything necessary always available, even in the field: The transport case has plenty of space for your THERMOMARK GO, including accessories and material cartridges. As an alternative, you can use the practical shoulder and belt bag, from where you can print your marking solutions directly.

## Marking made easy

With its compact dimensions and robust design, the THERMOMARK GO is ideally suited for mobile use in industrial environments. Use the MARKING system app to control the label printer easily via your iOS or Android device. Create marking projects flexibly on your smartphone or tablet, and print the markings out directly where you need them.

**Ideal companion**  
with a weight  
of just 743 g

**Easy connection**  
via Bluetooth, NFC,  
or USB

**Flexible marking**  
with pre-punched labels  
and continuous media  
with material widths  
up to 24 mm

**Versatile use**  
with more than  
100 different materials  
for all applications

**Intuitive and  
convenient**  
with easy and  
complete control  
via the MARKING  
system app



# Always have your printer with you THERMOMARK GO.K

Marking of devices and systems often has to be done spontaneously, without prior planning, during service and maintenance. An especially flexible and mobile solution for creating markings is required during maintenance repair overhauls (MRO). This is where the THERMOMARK GO.K comes into play – a practical handheld printer with an integrated keypad.

## Your advantages

- ✓ Processing of shrink sleeves, labels, and non-adhesive materials
- ✓ Intelligent keypad allows symbols, bar codes, and serial numbers to be integrated
- ✓ Optimum print settings with automatic material detection
- ✓ Easy exchange of marking data with connection to the PROJECT complete planning and marking software
- ✓ Quick and easy material changeover with the combined material and ink ribbon cartridge

# Reliable and flexible for unscheduled marking



## Simple data entry

The THERMOMARK GO.K input field prioritizes frequently used characters and offers an enormous selection of special characters. In addition, this handheld printer can store up to 20 projects and can generate eight types of barcodes.

## Versatile material selection

The THERMOMARK GO.K processes a wide variety of different labels with a width of up to 24 mm. It also prints shrink sleeves and cable winding labels for flexible conductor and cable marking.

## Practical transport accessories

Take your printer with you. You'll still have your hands free, whether it's in the shoulder bag, on the practical belt clip, or in the transport case. Various accessories facilitate convenient transport of the THERMOMARK GO.K.

## Easy handling, full flexibility

The handheld THERMOMARK GO.K printer is ideally suited for fast marking on site. The printer is robust and easy to use. You can enter the print data intuitively via the keypad, and there is also a wide range of special characters and symbols available.

The thermal transfer printer processes continuous media for marking cables, conductors, equipment, terminals, and plant marking.

**Easy operation**  
using the practical keypad

**Ideally formatted**  
with automatic material detection

**Versatile in application**  
with approximately 80 continuous media materials up to a width of 24 mm

**Tailored dimensions**  
with easy cutting to length using the cutter










**Always ready for use**  
with a high-performance rechargeable battery



















# THERMOMARK PRIME ordering data

| THERMOMARK PRIME  |                               |  |           |
|---|-------------------------------|--|-----------|
|  Web code: #0875 | Product designation           | Description  | Order No. |
|                  | THERMOMARK PRIME              | Mobile thermal transfer printer for card materials including accessories and scope of delivery: rechargeable battery, power supply unit, Euro/US power cable, USB cable, magazine for accommodating US cards (TMP-US-MAG1) and UCT sheets (TMP-UCT-MAG1), UCT-TM 6, US-EMLP (85.6 x 54), ink ribbon cartridge TMP-RIBBON 110 BK 100, user manual, support CD | 5148888   |
|  Web code: #0876 | Product designation           | Description  | Order No. |
|                  | TMP/CHARGER                   | Charging device for THERMOMARK PRIME rechargeable battery (TMP/ACCU), with reverse polarity protection and operating status display, operating voltage 10.8 V to 24 V  | 0803670   |
|                  | TMP/ACCU                      | Replacement rechargeable battery for THERMOMARK PRIME, NiMH 18 V DC, 2.1 Ah  | 0803668   |
|                 | TMP/ACCU COVER                | Battery compartment cover for THERMOMARK PRIME for protection against dust and dirt deposits (without rechargeable battery)  | 0803669   |
|                | TMP/EXT.POWER-SUPPLY 100-240V | Replacement power supply for THERMOMARK PRIME, input voltage from 100 V AC ... 240 V AC/1.5 A/50 Hz ... 60 Hz, output voltage: 24 V DC/4.16 A  | 0803672   |
|                | MOBILE BAGPACK                | Transport backpack for THERMOMARK PRIME including accessories, marking material, and consumables   | 0803717   |
|                | TMP BAG                       | Transport bag for THERMOMARK PRIME including accessories, marking material, and consumables  | 0803674   |
|                | TMP CASE                      | Transport case for THERMOMARK PRIME including accessories, marking material, and consumables; rounded profile case with aluminum frame   | 0803675   |



















## THERMOMARK PRIME

|  Web code: #0876 | Product designation   | Description   | Order No. |
|--|-----------------------|---|-----------|
|                  | TMP-RIBBON 110 BK 100 | Ink ribbon cartridge, length: 70 m, width: 110 mm, color: black, for example for text or logos for UCT..., US..., UM...   | 0803374   |
|  | TMP-RIBBON 110 BK 101 | Ink ribbon cartridge, length: 60 m, width: 110 mm, color: black, for large area printing, such as text or logos for US(2)-TM(F)..., US-TM(F)L..., US-WMT(B)..., US-EML..., US-EML(S)P..., US-EMLP-HA..., US-EM(S)P..., US-EML-RS... | 0803714   |
|  | TMP-RIBBON 110 BU 100 | Ink ribbon cartridge, length: 60 m, width: 110 mm, color: blue, for example for text or logos for US(2)-TM(F)..., US-TM(F)L..., US-WMT(B)..., US-EML..., US-EML(S)P..., US-EMLP-HA..., US-EM(S)P..., US-EML-RS...                   | 0803378   |
|  | TMP-RIBBON 110 GN 100 | Ink ribbon cartridge, length: 60 m, width: 110 mm, color: green, for example for text or logos for US(2)-TM(F)..., US-TM(F)L..., US-WMT(B)..., US-EML..., US-EML(S)P..., US-EMLP-HA..., US-EM(S)P..., US-EML-RS...                  | 0803380   |
|  | TMP-RIBBON 110 RD 100 | Ink ribbon cartridge, length: 60 m, width: 110 mm, color: red, for example for text or logos for US(2)-TM(F)..., US-TM(F)L..., US-WMT(B)..., US-EML..., US-EML(S)P..., US-EMLP-HA..., US-EM(S)P..., US-EML-RS...                    | 0803377   |
|  | TMP-RIBBON 110 WH 100 | Ink ribbon cartridge, length: 60 m, width: 110 mm, color: white, for example for text or logos for US(2)-TM(F)..., US-TM(F)L..., US-WMT(B)..., US-EML..., US-EML(S)P..., US-EMLP-HA..., US-EM(S)P..., US-EML-RS..., US-PML...       | 0803376   |
|  | TMP-RIBBON 110 YE 100 | Ink ribbon cartridge, length: 60 m, width: 110 mm, color: yellow, for example for text or logos for US(2)-TM(F)..., US-TM(F)L..., US-WMT(B)..., US-EML..., US-EML(S)P..., US-EMLP-HA..., US-EM(S)P..., US-EML-RS...                 | 0803379   |
|               | TMP-US-MAG1           | Magazine for THERMOMARK PRIME, for accommodating US cards   | 0803341   |
|               | TMP-UCT-MAG1          | Magazine for THERMOMARK PRIME, for accommodating UCT sheets (UCT-TM..., UCT1-TM..., UCT5-TM...)   | 0803342   |
|               | TMP-UCT-MAG2          | Magazine for THERMOMARK PRIME, for accommodating UCT sheets (UCT-TMF...)  | 0803343   |
|               | TMP-UCT-MAG3          | Magazine for THERMOMARK PRIME, for accommodating UCT sheets (UCT-WMS...)  | 0803344   |
|               | TMP-UCT-MAG4          | Magazine for THERMOMARK PRIME, for accommodating UCT sheets (UCT1-TMF...)   | 0803345   |
|               | TMP-UCT-MAG5          | Magazine for THERMOMARK PRIME, for accommodating UCT sheets (UCT2-TM...)  | 0803347   |
|               | TMP-UCT-MAG6          | Magazine for THERMOMARK PRIME, for accommodating UCT sheets (UCT2F-TM...)   | 0803348   |
|               | TMP-UCT-MAG7          | Magazine for THERMOMARK PRIME, for accommodating UCT sheets (UCT-WMT...)  | 0803349   |
| Additional magazines can be found on our website under the above listed web code.                |                       |   |           |

# THERMOMARK PRIME ordering data









| Terminal marking  |                 |   |   |   |
|---|-----------------|---|---|---|
|  Web code: #0877   | Material group  | Description   | Sizes   | Colors                                  |
|                    | UCT-TM...       | Markers for terminal blocks, sheet, unmarked, mounting method: latching into a tall marker groove   | All common terminal block widths from 3.5 mm to 16 mm           | White, yellow, red, blue, green, orange |
|                    | UCT-TMF...      | Markers for terminal blocks, sheet, unmarked, mounting method: latching into a flat marker groove   | All common terminal block widths from 3.5 mm to 16 mm           | White, yellow, red, blue, green, orange |
|                    | UCT...-TM(F)... | Markers for marking terminals made by various manufacturers, sheet format, unmarked, mounting method: latching into high or flat marker grooves | Various common pitches  | White, yellow, red, blue, green, orange |
|                    | US-TM...        | Markers for terminal blocks, card format, unmarked, mounting method: latching into universal marker grooves                                     | 104 x 9.8 mm  | White                                   |
|                    | US-TMF...       | Markers for terminal blocks, card format, unmarked, mounting method: latching into flat marker grooves  | 104 x 6.6 mm  | White                                   |
|                    | US-TMLF...      | Markers for terminal blocks, card format, unmarked, mounting method: affixing in flat marker grooves  | 104 x 6.6 mm  | White                                   |
|                   | US-TML...       | Markers for terminal blocks, card format, unmarked, mounting method: adhesive   | 104 x 2.8 mm to 104 x 10 mm                                     | White                                   |
|                  | UM...-TM...     | Markers for marking terminals made by various manufacturers, unmarked, mounting method: latching into high marker grooves                       | All common terminal block widths from 3.5 x 10 mm to 16 x 10 mm | White                                   |
|                  | UM1-TMF...      | Markers for marking Weidmüller, CONTA-CLIP, and Klemmsan terminal blocks, unmarked, mounting method: latching into flat marker grooves          | All common terminal block widths from 3.5 x 10 mm to 16 x 10 mm | White                                   |
| Conductor and cable marking   |                 |   |   |   |
|  Web code: #0878 | Material group  | Description   | Sizes   | Colors                                  |
|                  | UCT-WMT...      | Conductor markers, sheet material, unmarked, mounting method: push-in into PATG/PATO marker carriers  | Lettering field size 10 x 4 mm to 30 x 4 mm                     | White, yellow, red, blue, green, orange |
|                  | UCT-WMCO...     | Conductor markers, sheet material, unmarked, mounting method: clip-on   | Conductor diameter 1.1 mm to 7.5 mm                             | White, yellow                           |
|                  | UCT-WMS...      | Conductor markers, sheet material, unmarked, mounting method: push-on   | Conductor diameter 1.5 mm to 4.7 mm                             | White, yellow, red, blue, green, orange |
|                  | UCT-WMTBA...    | Cable markers, sheet, unmarked, mounting method: cable tie mounting   | Cable diameter ≥6 mm  | White, yellow                           |
|                  | US-WMT...       | Cable markers, sheet material, unmarked, mounting method: push-in into PATG/PATO marker carriers  | Lettering field size 10 x 4 mm to 30 x 4 mm                     | White, yellow, red, blue, green, orange |



| Conductor and cable marking  |                |   |  |                                  |
|--|----------------|---|--|----------------------------------|
|  Web code: #0878   | Material group | Description   | Sizes  | Colors                           |
|                   | US-WMTB...     | Cable markers, card, unmarked, mounting method: cable tie mounting  | Conductor diameter $\geq 6$ mm                                     | White                            |
|                   | US-WML...      | Cable winding labels, card format, unmarked, mounting method: adhesive  | Conductor/ cable diameter $\geq 4$ mm to $\leq 6$ mm               | White                            |
| Equipment marking  |                |   |  |                                  |
|  Web code: #0879   | Material group | Description   | Sizes  | Colors                           |
|                   | UCT-EM(P)...   | Markers for marking components made by various manufacturers, sheet format, unmarked, mounting method: latching   | Various common marker sizes from 5 x 10 mm to 60 x 15 mm           | White, yellow, turquoise         |
|                   | UCT4-EM(L)P... | Markers for marker carriers of the SIRIUS ACT 3SU... button range from Siemens, sheet format, unmarked, mounting method: latching in marker carriers/adhesive | Various common marker sizes from 27 x 12.5 mm to 27 x 27 mm        | White, silver                    |
|                   | US-EMP...      | Device markers, card format, unmarked, mounting method: latching into marker carriers   | Various common marker sizes from 8.8 x 15 mm to 100 x 15 mm        | White, yellow, silver, red, blue |
|                   | US-EMLP...     | Device markers, card format, unmarked, mounting method: adhesive  | Various common marker sizes from 8.8 x 15 mm to 104 x 135 mm       | White, yellow, silver, red       |
|                 | US-EML...      | Label, card, unmarked, mounting method: adhesive  | Various common marker sizes from 17.5 x 8 mm to 104 x 140 mm       | White, yellow, silver            |
|                 | US4-EM(L)P...  | Markers for marker carriers of the SIRIUS ACT 3SU... button range from Siemens, card format, unmarked, mounting method: latching in marker carriers/adhesive  | 27 x 17.5 mm   | White, silver                    |
|                 | US-EMSP...     | Device markers, card format, unmarked, mounting method: screw, rivet  | Various marker sizes from 39 x 15 mm to 90 x 60 mm                 | White, yellow, silver            |
| Plant marking  |                |   |  |                                  |
|  Web code: #0880 | Material group | Description   | Sizes  | Colors                           |
|                 | US-PML-W...    | Warning label, card format, unmarked, mounting method: adhesive   | Lettering field size 25 x 25 mm to 100 x 100 mm                    | Yellow                           |
|                 | US-PML-GHS...  | Hazardous substance label, card format, unmarked, mounting method: adhesive   | Lettering field size 13 x 13 mm and 25 x 25 mm                     | Red/white                        |
|                 | US-PML-M...    | Mandatory sign, card format, unmarked, mounting method: adhesive  | Lettering field size 50 mm and 100 mm                              | Blue                             |
|                 | US-PML-P...    | Prohibition sign, card format, unmarked, mounting method: adhesive  | Lettering field size 50 mm and 100 mm                              | Red/white                        |
|                 | US-PML-F...    | Marking for fire detection systems, card format, unmarked, mounting type: adhesive  | Lettering field size 40 x 15 mm and lettering field diameter 50 mm | Red/white, blue/white            |
|                 | US-PML-ESS...  | Marking for emergency stop switches, card format, unmarked, mounting type: adhesive   | Lettering field size 60 mm and 90 mm                               | Yellow                           |

# THERMOMARK GO SERIES ordering data

| THERMOMARK GO SERIES  |                               |  |           |
|---|-------------------------------|--|-----------|
|  Web code: #0881   | Product designation           | Description  | Order No. |
|                    | THERMOMARK GO                 | Mobile thermal transfer printer for marking materials in cartridge format incl. accessories. The printer can print pre-punched labels as well as materials in continuous format up to a material width of 24 mm. Scope of supply: rechargeable battery, power supply unit incl. 4 adapters, USB cable, MM-EML (20X8)R C1 WH/BK, quick guide  | 1090747   |
|                    | THERMOMARK GO SET             | Mobile thermal transfer printer for marking materials in cartridge format, including accessories in a practical transport case (L-BOXX system). The printer can print pre-punched labels as well as materials in continuous format up to a material width of 24 mm. Scope of supply: transport case, rechargeable battery, power supply unit incl. 4 adapters, USB cable, MM-EML (20X8)R C1 WH/BK, quick guide | 1221548   |
|                    | THERMOMARK GO.K               | Mobile handheld printer for marking materials in cartridge format. The printer can print materials in continuous format up to a material width of 24 mm. Scope of delivery: printer, quick guide   | 1184146   |
|                    | THERMOMARK GO.K SET           | Mobile handheld printer for marking materials in cartridge format, including accessories in a practical transport case (L-BOXX system). The printer can print materials in continuous format up to a material width of 24 mm. Scope of delivery: transport case, rechargeable battery, power supply unit incl. 4 adapters, USB cable, MM-EMLF (EX18)R C1 WH/BK, MM-EMLC (EX18)R C1 WH/BK, quick guide          | 1184148   |
|  Web code: #0882 | Product designation           | Description  | Order No. |
|                  | THERMOFOX/ACCU                | Rechargeable battery for mobile operation of the THERMOMARK GO and THERMOMARK GO.K printers  | 0805009   |
|                  | THERMOFOX/CHARGER             | Charging unit for charging the rechargeable battery THERMOFOX/ACCU   | 0805012   |
|                  | THERMOFOX/ADAPTER             | Power supply unit incl. 4 adapters for operation of the THERMOMARK GO and THERMOMARK GO.K printers   | 0805010   |
|                  | THERMOMARK GO CASE            | Practical and robust transport case in the proven L-BOXX system for storing and transporting the THERMOMARK GO and THERMOMARK GO.K mobile printers as well as the necessary accessories. The case has space for nine material cartridges.  | 1229456   |
|                  | THERMOMARK GO BAG             | Flexible shoulder bag and belt pouch all in one for the THERMOMARK GO mobile printer. Additional pockets provide space for a smartphone and materials  | 1229457   |
|                  | THERMOMARK GO.K BAG           | Shoulder bag for storing the THERMOMARK GO.K and the necessary accessories.  | 0805003   |
|                  | THERMOMARK GO.K BELT CLIP     | Clip for fastening the THERMOMARK GO.K mobile printer to a belt.   | 0805004   |
|                  | THERMOMARK GO.K MAGNET HOLDER | Magnetic holder for mounting the THERMOMARK GO.K mobile printer on metal surfaces, such as a control cabinet.  | 0805008   |

| Terminal marking   |                      |   |   |   |
|--|----------------------|---|---|---|
|  Web code: #0883   | Material group       | Description   | Sizes   | Color material/ink ribbon   |
|                   | MM-TML...            | Label for terminal blocks/zack marker strips, continuous material, mounting method: adhesive, the material is cUL-certified | Various widths, material length: 8 m  | White/black<br>Transparent/black  |
|                   | MM-TMT...            | Markers for terminal blocks, continuous, mounting method: latching into universal and flat marker grooves                   | Various widths, material length: 5.5 m  | White/black   |
| Conductor and cable marking  |                      |   |   |   |
|  Web code: #0884   | Material group       | Description   | Sizes   | Color material / ink ribbon   |
|                   | MM-WML...            | Cable winding labels, pre-punched, mounting method: adhesive, the material is cUL-certified                                 | Conductor/cable diameter $\geq 2$ mm to $\leq 14$ mm                              | White/black   |
|                   | MM-WML... (EX...)... | Cable winding labels, continuous, mounting method: adhesive, the material is cUL-certified                                  | Conductor/cable diameter $\geq 2$ mm to $\leq 5$ mm<br>Material length: 6.5 m     | White/black<br>Yellow/black   |
|                   | MM-WML-FLAG...       | Cable marking flags, pre-punched, mounting method: adhesive, the material is cUL-certified                                  | Conductor/cable diameter $\geq 1$ mm to $\leq 6$ mm                               | White/black   |
|                   | MM-WMS...            | Shrink sleeves, shrink rate: 3:1, continuous, mounting method: push-on; the material is cUL-certified                       | Conductor/cable diameter $\geq 1.0$ mm to $\leq 9.5$ mm<br>Material length: 1.8 m | White/black<br>Yellow/black   |
|                  | MM-WMS-2...          | Shrink sleeves, shrink rate: 2:1, continuous, mounting method: push-on; the material is cUL-certified                       | Conductor/cable diameter $\geq 1.5$ mm to $\leq 9.5$ mm<br>Material length: 1.8 m | White/black<br>Yellow/black   |
|                 | MM-WMT...            | Conductor markers, pre-punched, mounting method: push-on  | Conductor/cable diameter $\geq 1.0$ mm to $\leq 8.4$ mm                           | White/black   |
|                 | MM-WMTB...           | Cable markers, pre-punched, mounting method: cable tie mounting   | Cable diameter $\geq 6$ mm  | White/black   |
|                 | MM-WMTB HF...        | Cable markers, pre-punched, mounting method: cable tie mounting   | Cable diameter $\geq 6$ mm  | White/black<br>Yellow/black   |
| Equipment marking  |                      |   |   |   |
|  Web code: #0885 | Material group       | Description   | Sizes   | Color material/ink ribbon   |
|                 | MM-EML...            | Labels, pre-punched, mounting method: adhesive, the material is cUL-certified   | Various lettering field sizes   | White/black<br>Yellow/black   |
|                 | MM-EML (EX...)...    | Labels, continuous, mounting method: adhesive, the material is cUL-certified  | Various widths, material length: 8 m  | White/black<br>Yellow/black<br>Silver/black<br>Transparent/black                  |
|                 | MM-EMLC...           | Highly flexible labels, continuous, mounting method: adhesive, the material is UL-certified                                 | Various widths, material length: 6 m  | White/black   |
|                 | MM-EMLF...           | Labels, continuous, mounting method: adhesive, the material is cUL-certified (only white and yellow versions)               | Various widths, material length: 8 m  | White/black, yellow/black,<br>orange/black, red/white,<br>blue/white, green/white |
|                 | MM-EMT...            | Markers for various marker carriers, continuous, mounting type: Push-in into marking carriers                               | Various widths, material length: 5.5 m  | White/black   |

**Please note:**

Pre-punched parts can only be processed with the THERMOMARK GO.

## Open communication with customers and partners worldwide

Phoenix Contact is a global market leader based in Germany. We are known for producing forward-thinking products and solutions for the comprehensive electrification, networking, and automation of all sectors of the economy and infrastructure. With a global network, we maintain close relationships with our customers, something we believe is essential for our common success.

You can find your local partner at  
[phoenixcontact.com](https://phoenixcontact.com)

